

SANUPS A22A

Online UPS

Ver.2
English



SANUPS A22A

Modular UPS with capacity scalability in 5 kVA increments




Lineup

[No. of phases/wires] Input voltage	[No. of phases/wires] Output voltage	Output capacity	Battery backup time*
		[kVA]	
[3-phase 4-wire] 400 V _{model} 380/400/415 VAC	[3-phase 4-wire] 400 V _{model} 380/400/415 VAC	5 to 50	10, 30, 60, 90 min
		55 to 70	10, 30, 60 min
		75 to 105	10, 30 min
	[Single-phase 2-wire] 200 V _{model} 220/230/240 VAC	5 to 50	10, 30, 60, 90 min
		55	10, 30, 60 min

* At a 25°C ambient temperature, load power factor of 0.75, using new, fully charged batteries.

Operating Panel

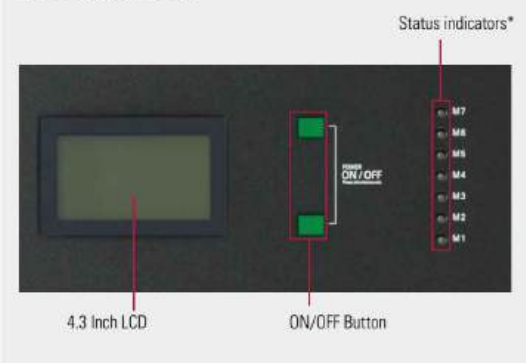

* M1 to M4 only for half-size cabinets.

High Efficiency

- This UPS achieves a high efficiency of 94.5%. This reduces running costs and contributes to energy savings.

Flexible System Configuration

- 5 kVA modules allow users to select the output capacity to match the needs of the application.



- By adding battery modules, backup time during power outages can be extended.

High Reliability

- The double conversion online topology ensures a continuous supply of stable high quality power.
- Parallel redundant operation further improves the reliability of the power supply.

Wide Input Voltage Range

- This UPS has a wide input voltage range of 240 to 460 V⁽¹⁾ and a wide input frequency range of 46 to 54 Hz⁽²⁾.

This prevents unnecessary battery operation, minimizing battery drain.

(1) The input voltage range when the rated input voltage is set to 400 V.

(2) The input frequency range when the rated input frequency is set to 50 Hz.

Easy Maintenance


- Front-access design allows users to install and remove batteries and inverter modules easily.
- Maintenance can be performed without interrupting the inverter power to critical loads during parallel redundant operation. In addition, power can continue to be supplied even if an outage occurs during maintenance.




Inverter Module Specifications

Item	Specifications		Remarks
Technology	Topology	Double conversion online	
	Cooling method	Forced air cooling	
	Inverter	High-frequency PWM	
	Inverter structure	Modular	
	Battery structure	Modular	
AC input	No. of phases/wires	3-phase 4-wire	
	Rated voltage	380/400/415 VAC	
	Input voltage range	Within -40% to +15% of rated voltage	At load levels < 70%. The lower limit is -40% when leaving the range and -20% when returning.
		Within -20% to +15% of rated voltage	At load levels ≥ 70%
	Rated frequency	50/60 Hz (auto-sensing)	
	Frequency range	Within ± 8% of rated frequency	
	Power factor	0.97 or greater	At rated output, when input voltage harmonic distortion is less than 1%
AC output	Rated capacity	5 kVA / 5 kW	Apparent power / active power
	No. of phases/wires	3-phase 4-wire	Single-phase 2-wire
	Rated voltage	380/400/415 VAC	220/230/240 VAC
	Voltage regulation	Within ± 2% of rated voltage	Within ± 3% of rated voltage
	Rated frequency	50/60 Hz	Same as the input frequency
	Frequency regulation	Within ± 1/3/5% of rated frequency	Configurable
		Within ± 0.5% of rated frequency	In battery operation
	Voltage harmonic distortion	2% or less / 5% or less	3% or less / 7% or less
	Transient voltage fluctuation	For abrupt load change	Within ± 3% of rated voltage
		For loss/return of input power	Within ± 5% of rated voltage
		For abrupt input voltage change	
	Load power factor	0.7 (lagging) to 1.0	At linear load / rectifier load, rated output
Overcurrent protection		Drop (instantaneous), inverter shutdown	For 0 ⇄ 100% load step changes
	Efficiency	94.5%	At rated output
	Acoustic noise	55 dB or less	1 m from front of UPS, A-weighting
Operating environment	Ambient temperature	0 to +40°C	During operation
		-15 to +40°C	During storage, transportation
	Relative humidity	10 to 95% (non-condensing)	During operation, storage, transportation
Expected service life (of the UPS unit excluding battery)		15 years (At a 25°C average ambient temperature. For reference purposes only.)	
Installation location		Indoors	
Operating altitude		2,000 m or less	
Standards		RoHS directive	
Battery			
Battery type		Small-sized valve-regulated lead-acid (VRLA) battery	
Battery configuration		12 V, 102 Wh (9 Ah) equivalent	
Batteries per inverter module		16	

Load Level vs Backup Time

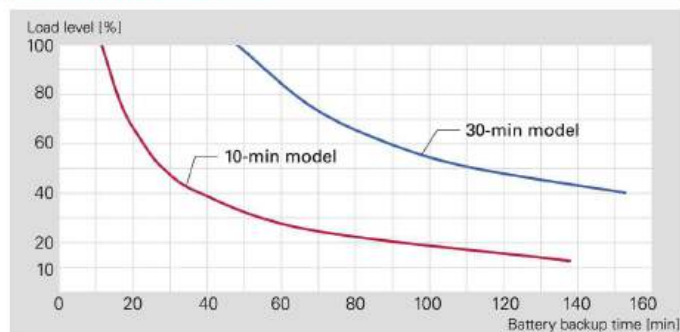

Note: At a 25°C ambient temperature and load power factor of 0.75, reference values using new, fully charged batteries.

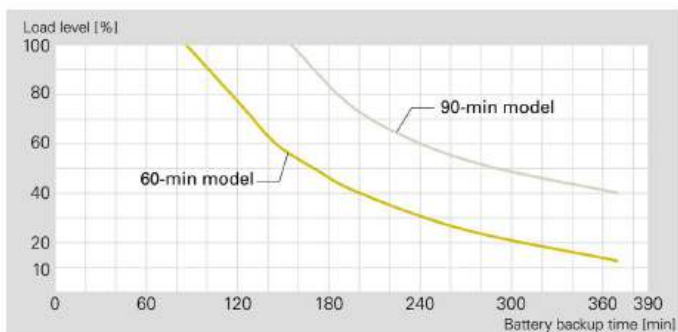



Network Options


Item	Model no.	Remarks
LAN interface card	IPv4/IPv6, Modbus TCP supported	PRLANIF022A
	IPv4/IPv6, Modbus TCP/RTU supported	PRLANIF024A
	IPv4/IPv6, environmental monitoring supported	PRLANIF013B-US

Note: Option products have different operating temperature ranges from the UPS.

Cabinet Configurations and Dimensions

3-phase 4-wire 400 V models

UPS capacity	[kVA]	5				10		15		20		5				10			15		20		25		30		35	
Battery backup time	[min]	10	30	60	90	10	30	10	10	10	30	60	90	10	30	60	10	30	10	10	10	10	10	10				
Cabinet	Model no.	PDA22AT04NB001E								PDA22AT07NB001E																		
Inverter module [Qty]	A22A502B001E ⁽¹⁾	1	1	1	1	2	2	3	4	1	1	1	1	2	2	2	3	3	4	5	6	7						
Battery module [Qty]	BCA22AA00E	0	1	2	3	0	2	0	0	0	1	2	3	0	2	4	0	3	0	0	0	0						
Battery pack [Qty]	BPA22AA00E	2	6	10	14	4	12	6	8	2	6	10	14	4	12	20	6	18	8	10	12	14						
Cabinet dimensions [mm]		Half-size																										
																												
Cabinet mass ⁽²⁾		Approx. 125 kg									Approx. 160 kg																	

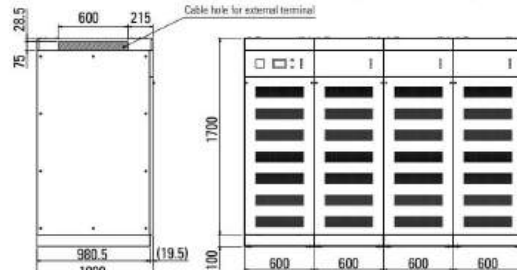UPS capacity [kVA]		30	35	40	45	55	60	65	70	
Battery backup time [min]		90	90	60	60	30	30	30	30	
Cabinet	Model no.	PDA22AT28NB001E								
Inverter module [Qty]	A22A502B001E ⁽¹⁾	6	7	8	9	11	12	13	14	
Battery module [Qty]	BCA22AA00E	18	21	16	18	11	12	13	14	
Battery pack [Qty]	BPA22AA00E	84	98	80	90	66	72	78	84	
Cabinet dimensions [mm]										
Cabinet mass ⁽²⁾		Approx. 640 kg								


(1) Parallel redundant operation is recommended for increased reliability of the supplied power.

(2) Not including the weight of modules, battery packs, or cables between units.

Dimensions (Unit: mm)

Inverter module (single unit)


A22A502B001E

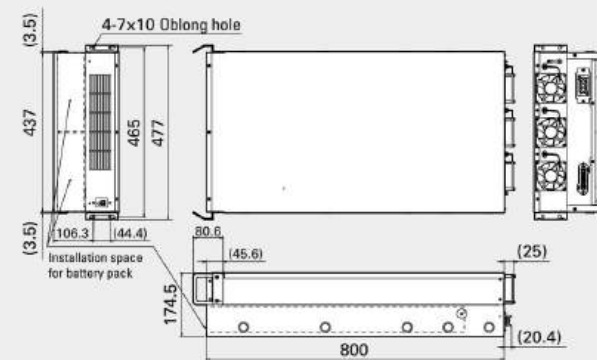

Mass: approx. 30 kg

Battery module (single unit)

BCA22AA00E

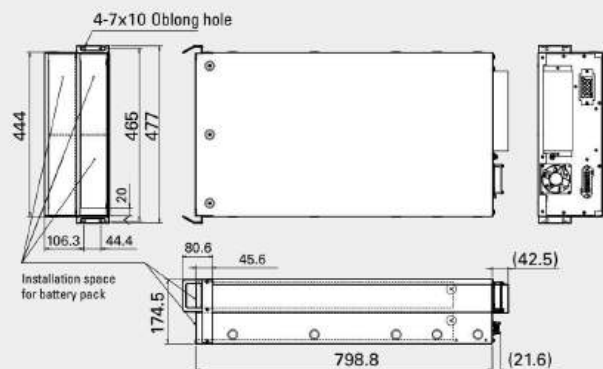

Mass: approx. 21 kg


	10	15		20		25	30	35	40	45	50	55	60	65	70		20	25		30	35	40	45	50	75	80	85	90	95	100	105
	90	60	90	30	60	30	30	30	10	10	10	10	10	10	10		90	60	90	60	60	30	30	30	10	10	10	10	10	10	10
PDA22AT14NB001E																PDA22AT21NB001E															
	2	3	3	4	4	5	6	7	8	9	10	11	12	13	14		4	5	5	6	7	8	9	10	15	16	17	18	19	20	21
	6	6	9	4	8	5	6	7	0	0	0	0	0	0	0		12	10	15	12	14	8	9	10	0	0	0	0	0	0	0
	28	30	42	24	40	30	36	42	16	18	20	22	24	26	28		56	50	70	60	70	48	54	60	30	32	34	36	38	40	42
Approx. 320 kg																Approx. 480 kg															

	40		50		55		75		80		85		45	50	60	65	70	90	95	100	105
	90		60		60		30		30		30		90	90	60	60	60	30	30	30	30
PDA22AT35NB001E												PDA22AT42NB001E									
	8		10		11		15		16		17		9	10	12	13	14	18	19	20	21
	24		20		22		15		16		17		27	30	24	26	28	18	19	20	21
	112		100		110		90		96		102		126	140	120	130	140	108	114	120	126
Approx. 800 kg												Approx. 960 kg									

Paint color: Black (Munsell N1.5)

Battery pack



BPA22AA00E

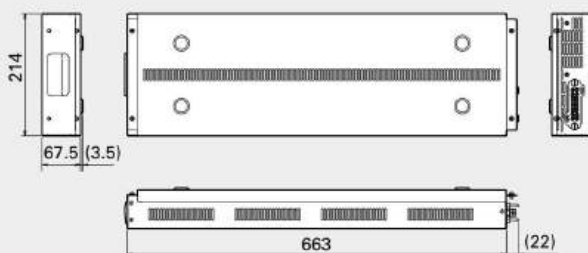


Mass: approx. 26 kg

Cabinet Configurations and Dimensions

Single-phase 2-wire 200 V models

UPS capacity	[kVA]	5				10		15	20	5				10			15		20	25	30	35		
Battery backup time	[min]	10	30	60	90	10	30	10	10	10	30	60	90	10	30	60	10	30	10	10	10	10		
Cabinet	Model no.	PDA22AS04NB001E								PDA22AS07NB001E														
Inverter module [Qty]	A22A502B001E ⁽¹⁾	1	1	1	1	2	2	3	4	1	1	1	1	2	2	2	3	3	4	5	6	7		
Battery module [Qty]	BCA22AA00E	0	1	2	3	0	2	0	0	0	1	2	3	0	2	4	0	3	0	0	0	0		
Battery pack [Qty]	BPA22AA00E	2	6	10	14	4	12	6	8	2	6	10	14	4	12	20	6	18	8	10	12	14		
Cabinet dimensions [mm]																								
Cabinet mass ⁽²⁾		Approx. 125 kg								Approx. 160 kg														

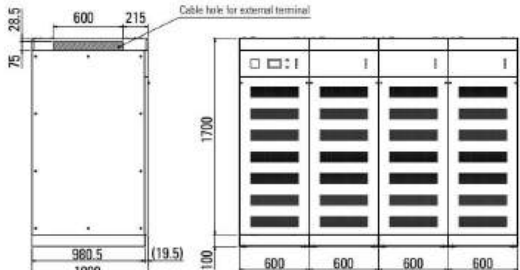
UPS capacity	[kVA]	30	35	40	45	55	
Battery backup time	[min]	90	90	60	60	30	
Cabinet	Model no.	PDA22AS28NB001E					
Inverter module [Qty]	A22A502B001E ⁽¹⁾	6	7	8	9	11	
Battery module [Qty]	BCA22AA00E	18	21	16	18	11	
Battery pack [Qty]	BPA22AA00E	84	98	80	90	66	
Cabinet dimensions [mm]							
Cabinet mass ⁽²⁾		Approx. 640 kg					

(1) Parallel redundant operation is recommended for increased reliability of the supplied power.

(2) Not including the weight of modules, battery packs, or cables between units.

LCD Panel

Main screen

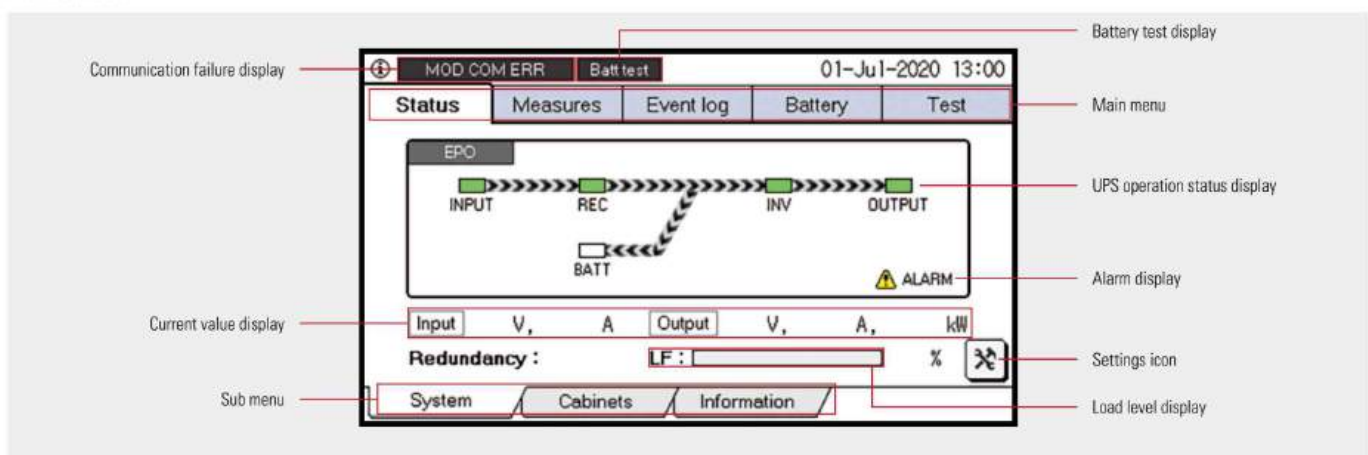

10	15	20	25	30	35	40	45	50	55	20	25	30	35	40	45	50
90	60	90	30	60	30	30	30	10	10	90	60	90	60	60	30	30
PDA22AS14NB001E										PDA22AS21NB001E						
2	3	3	4	4	5	6	7	8	9	4	5	5	6	7	8	9
6	6	9	4	8	5	6	7	0	0	12	10	15	12	14	8	9
28	30	42	24	40	30	36	42	16	18	56	50	70	60	70	48	54

Approx. 320 kg

Approx. 480 kg

40	50	55	45	50
90	60	60	90	90
PDA22AS35NB001E			PDA22AS42NB001E	
8	10	11	9	10
24	20	22	27	30
112	100	110	126	140

Approx. 800 kg


Approx. 960 kg

Paint color: Black (Munsell N1.5)


Module information display

Tap here to display the information of CAB4 and subsequent cabinets

Module information display for each cabinet

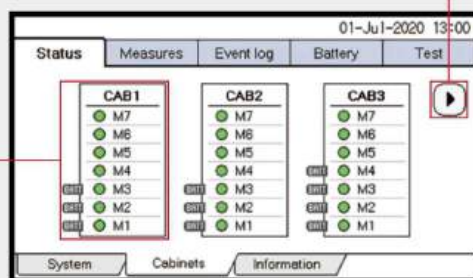


Module selection

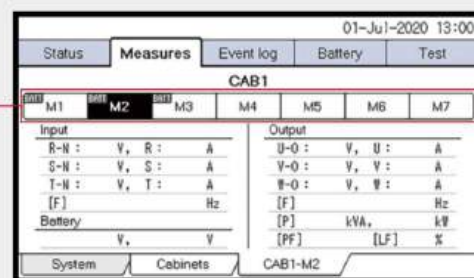

Note: Only the information of CAB1 and M1 to M4 is displayed for half-size cabinets.

Circuit Block Diagram

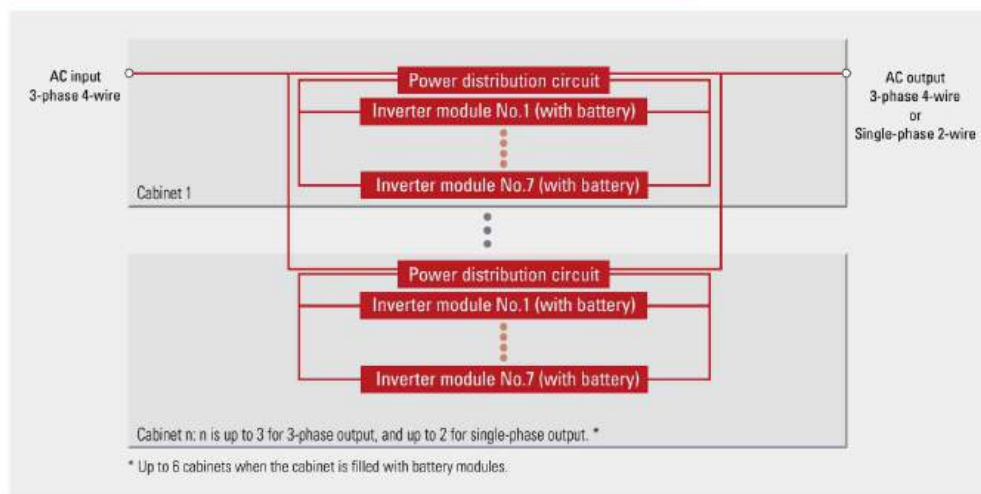

■ Eco Products

SANYO DENKI's ECO PRODUCTS are designed with the concept of lessening impact on the environment in the process from product development to waste. The product units and packaging materials are designed for reduced environmental impact. We have established our own assessment criteria on the environmental impacts applicable to all processes, ranging from design to manufacture. Those products that satisfy the criteria are accredited as ECO PRODUCTS.

● Fire Service Law and Fire Prevention Ordinance in Japan

The Fire Prevention Ordinance regulates the total battery capacity of storage batteries, including lithium-ion batteries, that can be installed indoors. When installing UPSs indoors, confirm that the total battery capacity in one location does not exceed 4,800 Ah-cell. In other cases, consult with your local fire department for approval.

Note that the UPSs cannot be used as an emergency power supply for firefighting equipment.

● Building Standard Law in Japan

The UPSs cannot be used as backup power for building facilities conforming to the disaster management requirements defined in the Building Standard Law.

Notes before Purchase

- Before installing, assembling, and using the products, please read Instruction Manual carefully and use them properly.
- When using the products in the following applications, consult with us in advance because special considerations are required for operation, maintenance, and management.
 - (a) Medical equipment that may have direct effects on human life or human body.
 - (b) Trains, elevators, and other machinery that can cause injury.
 - (c) Socially and publicly important computer systems.
 - (d) Other equipment that is related to safety of human life and that can have major impact on maintenance of public functions.
- For use in an environment where vibration is present, such as in a car or a ship, please consult with us in advance.
- Never attempt to disassemble or alter the products in any way.
- For installation and maintenance work of the products, please consult with us or properly licensed personnel.
- Please contact us concerning the disposal of used storage batteries supplied by SANYO DENKI.

- The products listed in this catalog fall into the category 16 of Appended Table 1 of the Export Trade Control Order. To export the products as an individual part or to export a device into which the products are assembled, the "Inform Requirements" and "Objective Requirements" that the Ministry of Economy, Trade and Industry of Japan established based on the "Catch-all Controls" must be studied for applicability. Accordingly, appropriate export formalities must be performed.
- SANYO DENKI will not be liable for any direct or indirect damages or loss, including but not limited to equipment downtime, missed power sales revenue, business interruptions, increased power purchases, resulting from the use of or inability to use our products or services.
- The products listed in this catalog are equipped with lithium-ion batteries. When transporting the products, do not transport by air. When transporting by sea, transport must be carried out according to the International Maritime Dangerous Goods (IMDG) Code. Also, depending on the country and region, there are cases where regulations are established independently, so please consult with the shipping company in advance.

For any inquiry or consultation, please contact a SANYO DENKI sales representative.

SANYO DENKI CO., LTD. 3-33-1 Minami-Otsuka, Toshima-ku, Tokyo 170-8451, Japan TEL: +81 3 5927 1020

<https://www.sanyodenki.com/>

The names of companies and/or their products specified in this document are the trade names, and/or trademarks and/or registered trademarks of such respective companies.

San Ace, SANUPS, and SANMOTION are registered trademarks of SANYO DENKI CO., LTD.

Specifications are subject to change without notice.

CATALOG No. P1037B012 '26.1