



WHF No Preload

DN value	120,000
----------	---------




WHF1530/1540/2020/2025/
2030/2040/2550



WHF2525

Model No.	Screw shaft outer diameter	Lead	Ball center- to-center diameter	Thread minor diameter	No. of loaded circuits	Basic load rating		Rigidity K	Nut dimensions		
						Ca	C _{0a}		Outer diameter	Flange diameter	Overall length
	d	Ph	dp	dc	Rows X turns	kN	kN	N/μm	D	D ₁	L ₁
WHF 1530-3.4	15	30	15.75	12.5	2×1.7	8	14.4	195	32	53	64.5
WHF 1540-3.4	15	40	15.75	12.5	2×1.7	7.7	16.3	209	34	57	81.6
WHF 2020-3.4	20	20	20.75	17.5	2×1.7	9.6	21	225	42	64	47.1
WHF 2025-3.4	20	25	20.75	17.6	2×1.7	9.8	22.3	236	39	62	56.2
WHF 2030-3.4	20	30	20.75	17.6	2×1.7	9.9	23.5	243	39	62	65.3
WHF 2040-3.4	20	40	20.75	17.5	2×1.7	9.6	20.3	256	37	57	82.7
WHF 2525-3.4	25	25	26	21.9	2×1.7	14.5	33.1	285	50	77	58.8
WHF 2550-3.4	25	50	26	21.9	2×1.7	14.4	31.9	323	45	69	103.3

Positioning Ball Screw

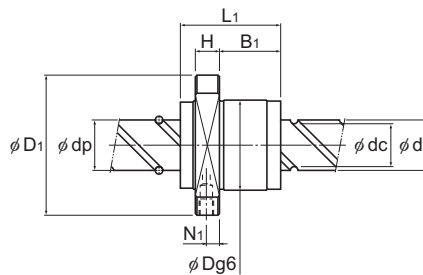

Unit: mm

	Nut dimensions							Screw shaft inertial moment/mm	Nut mass	Shaft mass	Permissible rotational speed
	H	B _i	PCD	d _i	Tw	N _i	Lubrication hole A				
								kg·m²/mm	kg	kg/m	min ⁻¹
	10	47.5	43	5.5	33	5	M6	3.9×10 ⁻⁸	0.38	1.26	5,000
	10	64.6	45	5.5	40	5	M6	3.9×10 ⁻⁸	0.48	1.28	5,000
	10	24.1	53	5.5	46	5	M6	1.23×10 ⁻⁷	0.49	2.25	5,000
	10	33.2	50	5.5	46	5	M6	1.23×10 ⁻⁷	0.51	2.26	5,000
	10	43.3	50	5.5	46	5	M6	1.23×10 ⁻⁷	0.55	2.28	5,000
	10	65.7	47	5.5	38	5	M6	1.23×10 ⁻⁷	0.58	2.34	5,000
	12	31.3	63	6.6	56	6	M6	3.01×10 ⁻⁷	0.65	3.52	4,610
	12	79.3	57	6.6	46	6	M6	3.01×10 ⁻⁷	0.72	3.66	4,610

Notes: The Model WHF can be equipped with a brush seal depending on the model number. Contact THK if you would like to use one.

The overall length of the nut will increase when equipping the QZ Lubricator. See **A15-366** for further details.