



Model LSP

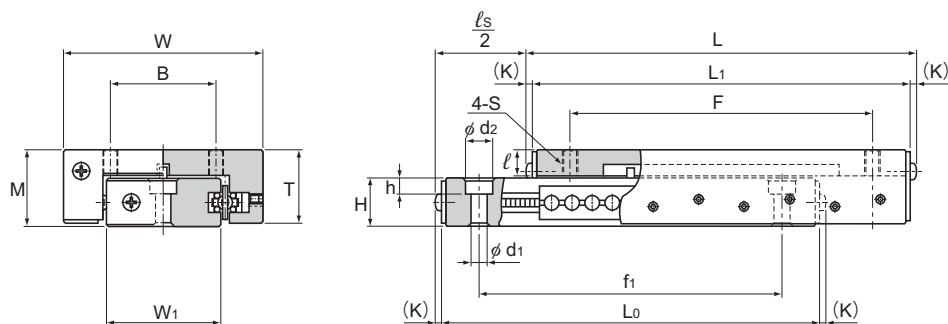

Model No.	Slider dimensions									
	Max. Stroke l_s	Height M ± 0.25	Width W ± 0.25	Length L	T	L ₁	(K)	B	F	S $\times$ ℓ
LSP 1340	15	13	25	42	12.5	40	1	11	30	M3 $\times$ 5
LSP 1365	25	13	25	67	12.5	65	1	11	55	M3 $\times$ 5
LSP 1390	50	13	25	92	12.5	90	1	11	80	M3 $\times$ 5
LSP 2050	25	20	44	53	18.3	50	1.5	20	35	M5 $\times$ 8.2
LSP 2080	50	20	44	83	18.3	80	1.5	20	65	M5 $\times$ 8.2
LSP 20100	75	20	44	103	18.3	100	1.5	20	85	M5 $\times$ 8.2
LSP 25100	50	25	66	103.8	24	100	1.9	35	75	M5 $\times$ 8.5
LSP 25125	75	25	66	128.8	24	125	1.9	35	100	M5 $\times$ 8.5
LSP 25150	100	25	66	153.8	24	150	1.9	35	125	M5 $\times$ 8.5

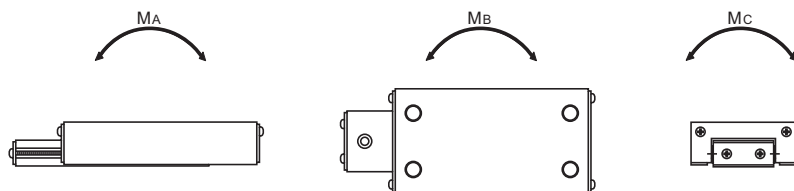

Unit: mm

	Base dimensions					Static permissible moment ¹		Basic load rating		Mass g
	Width W ₁	Height H	d ₁ ×d ₂ ×h	Length L ₀	f ₁	M _A , M _B	M _C	C	C ₀	
						N·m	N·m	N	N	
	12.2	7.7	3.3×6×3.3	40	30	0.88	0.49	68.6	118	37
	12.2	7.7	3.3×6×3.3	65	55	1.76	0.98	118	206	60
	12.2	7.7	3.3×6×3.3	90	80	3.04	1.27	157	275	85
	22.3	11	5.3×9×5.3	50	35	1.37	2.25	157	284	114
	22.3	11	5.3×9×5.3	80	65	3.53	4.51	304	559	184
	22.3	11	5.3×9×5.3	100	85	5	5.69	392	706	231
	38	15.8	5.3×9×5.3	100	75	9.22	14.5	588	1069	433
	38	15.8	5.3×9×5.3	125	100	12.9	18.1	735	1333	547
	38	15.8	5.3×9×5.3	150	125	17.5	21.9	882	1598	652

¹ M_A, M_B and M_C each indicate the permissible moment per LM system, as shown in the figure above.