



Models LR and LR-Z

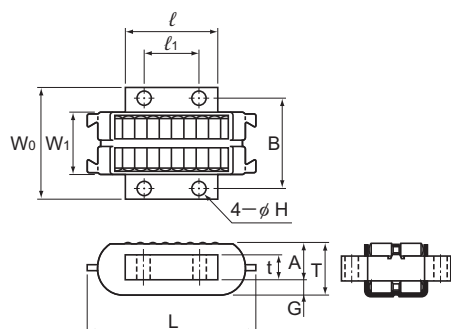


Model LR

Note: A type with UU seal is not available for model LR without symbol Z.

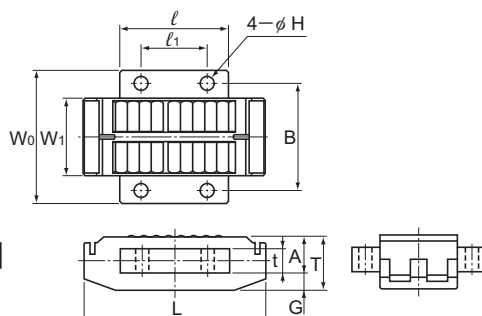

Model LR-Z




LR-Z...model UU


Unit: mm

Model No.	Main dimensions														Mass g	Basic dynamic load rating C kN	Basic static load rating C ₀ kN
	W ₁	Length	Thickness	Width				ℓ	Mounting hole pitch					Mounting bolt			
	0	L	T	W ₀	A	t	G	0	ℓ ₁	B	H	S					
	□0.1							□0.2									
LR 1547Z	15	47	16	30	11	7	5	20	12	23	3.4	0.2	M3*	60	21.6	39.9	
LR 2055Z	20	55	17.3	36	12	8	5.3	30	18	29	4.5	0.2	M4*	110	38.9	84.9	
LR 2565Z	25	65	20.6	45	14	9	6.6	35	20	36	5.5	0.1	M5*	190	55	113	
LR 3275Z	32	75	21.6	55	15	10	6.6	45	27	44	5.5	0.1	M5*	320	88	208	
LR 4095	40	95	30	68	21	14	9	55	35	54	6.6	0.3	M6	800	150	326	
LR 50130	50	130	42	82	30	20	12	78	50	66	9	0.3	M8	1810	285	577	

Note: Using a hexagonal-socket-head type bolt as the mounting bolt marked with * may cause interference.



Model LR or LR-Z



Roller protrusion