


Model LRU

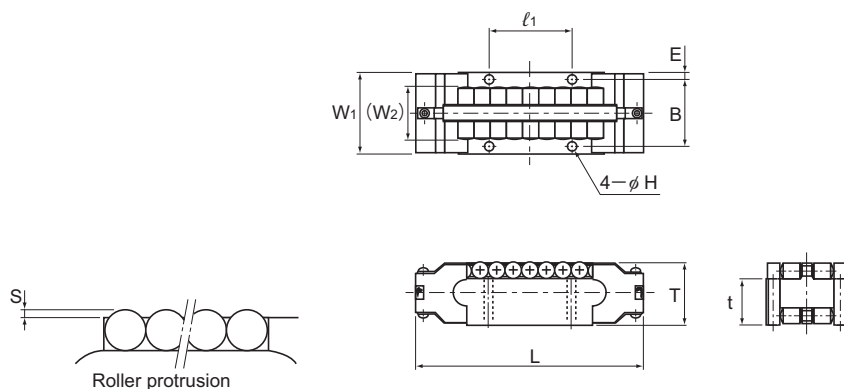

Unit: mm

Model No.	Main dimensions											Mass	Basic dynamic load rating	Basic static load rating
	Thick- ness T	Width		W ₂	t	Length		B	H	S	E			
		W ₁	Tolerance			L	ℓ ₁							
mm(inch)	mm(inch)			mm(inch)	mm(inch)					kg	kN	kN		
LRU 22.2	14.283 (⁹ / ₁₆)	22.23 (⁷ / ₈)	0 ±0.050	11.4	10.48	51 (2)	19.05 (³ / ₄)	17.07	3	0.253	2.58	0.09	22.1	42.5
LRU 25.4	19.05 (³ / ₄)	25.4 (1)	0 ±0.050	15.4	13.97	73 (2 ⁷ / ₈)	25.4 (1)	20.6	3.4	0.2	2.4	0.22	41.9	78.9
LRU 38.1	28.573 (1 ¹ / ₈)	38.1 (1 ¹ / ₂)	0 ±0.050	23.5	20.953	101.6 (4)	38.1 (1 ¹ / ₂)	30.96	4.5	0.22	3.57	0.7	107	198
LRU 50.8	38.098 (1 ¹ / ₂)	50.8 (2)	0 ±0.075	31.5	27.938	139.7 (5 ¹ / ₂)	50.8 (2)	41.28	5.6	0.46	4.76	1.7	171	296
LRU 76.2	57.15 (2 ¹ / ₄)	76.2 (3)	0 ±0.075	49.8	41.15	206.4 (8 ¹ / ₈)	76.2 (3)	61.9	6.6	0.5	7.15	5.7	478	807

Note: For recommended mounting bolts, see **A10-15**