


Cam Follower Containing Thrust Balls Model CFN-R-A

Optional specifications		Symbol
Roller guide	With cage	No Symbol
Material	Carbon steel	No Symbol
Seal	Without seal	No Symbol
Outer ring shape	Spherical outer ring	R

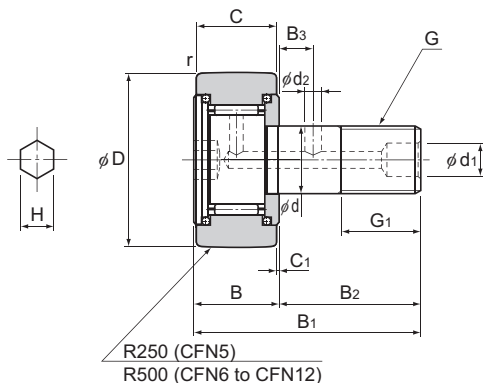

Stud diameter d	Model No. Spherical outer ring	Main										
		Outer diameter	Outer ring width	Threaded			Overall length					
		D	C	G	G ₁	B	B ₁	B ₂	B ₃	C ₁	d ₁	
5	CFN 5R-A	13	9	M5×0.8	7.5	10	23	13	—	0.5	— ¹	
6	CFN 6R-A	16	11	M6×1	8	12	28	16	—	0.6	— ¹	
8	CFN 8R-A	19	11	M8×1.25	10	12	32	20	—	0.6	— ¹	
10	CFN 10R-A	22	12	M10×1.25	12	13	36	23	—	0.6	— ¹	
12	CFN 12R-A	30	14	M12×1.5	13	15	40	25	6	0.6	6	

Note: For information on accuracy standards, please refer to **A19-14**.

Model number coding

CFN12 R-A N

Model No.


R : Spherical outer ring

No Symbol : No grease nipple

N : Dedicated grease nipple included (See **A19-39**)

Stud head with a hexagon socket

Note: For accessories, please refer to **A19-38**.

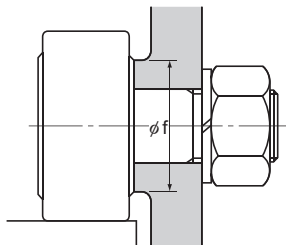

Unit:mm

dimensions					Basic load rating		Permissible thrust load	Maximum permissible load F ₀ NkN	Track load capacity kN	Rotational speed limit ² min ⁻¹	Mass g
	d ₂	H	r _{amin}	Shoulder height f (Min.)	C kN	C ₀ kN					
	— ¹	3	0.3	10	3.14	2.77	160	1.42	0.53	29000	10.5
	— ¹	3	0.3	12	3.59	3.58	250	2.11	1.08	25000	18.5
	— ¹	4	0.3	14	4.17	4.65	290	4.73	1.37	20000	28.5
	— ¹	5	0.3	16.5	5.336.78		400	5.81	1.67	17000	45
	3	6	0.6	21.5	7.879.79		680	9.37	2.45	14000	105

¹ These models do not have a lubrication hole and cannot be replenished with grease.

² The rotation speed limit value in the table applies to models using grease lubrication. With those models using oil lubrication, up to 130% of this value is permitted.