



JRV

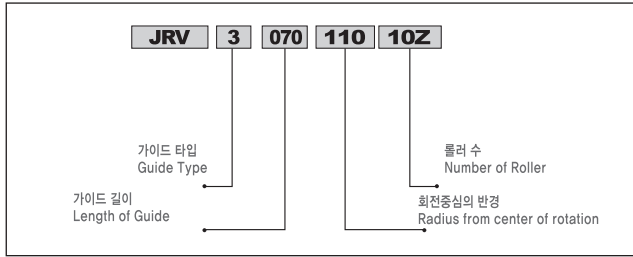

Specification Model	회전범위 Rotating Range	롤러외경 Roller Dia. D	롤러수 The Number of Rollers Z	주요치수 Main Dimension													기본정격하중 Basic Load Rating		질량 Weight
				L	R ₁	R	R ₂	A	B	C	M x P	N	E	S ₁	T	θ	C N	C ₀ N	
JRV 2040 - 50 7Z	±10°	2	7	40	50	53	47	15	6	7.25	2×12.5	7.5	2.5	M3	1.5	47.3°	802	813	49
JRV 2060 - 60 12Z			12	60	60	63	57				3×12.5	11.25				60.0°	1240	1530	75
JRV 3050 - 50 8Z	±10°	2	8	50	50	50	46	18	8	8.5	2×15	10	3	M3	2	60.0°	1870	2480	96
JRV 3050 - 68 7Z			7	50	68	72	64				2×15	10				43.0°	1720	2350	96
JRV 3060 - 50 10Z			10	60	50	54	46				2×15	15				74.0°	2530	3310	107
JRV 3060 - 68 10Z			10	60	68	72	64				2×15	15				52.0°	2530	3310	107
JRV 3060 - 100 8Z			8	60	100	104	96				2×15	15				35.0°	2040	2560	107
JRV 3070 - 60 12Z			12	70	70	74	66				3×15	12.5				60.0°	2900	3840	138
JRV 3070 - 90 11Z			11	70	90	94	86				3×15	12.5				45.8°	2630	3510	138
JRV 3070 - 96 10Z			10	70	96	100	92				3×15	12.5				43.0°	2420	3200	138
JRV 3070 - 110 10Z			10	70	110	114	106				3×15	12.5				37.1°	2630	3510	138
JRV 3070 - 122 10Z			10	70	122	126	118				3×15	12.5				33.0°	2420	3200	138
JRV 3100 - 160 14Z			14	100	160	164	156				3×15	12.5				33.4°	3380	4920	193

E

Goniometer Cross Roller Guide