


Miniature and Small Size Ball Bearings

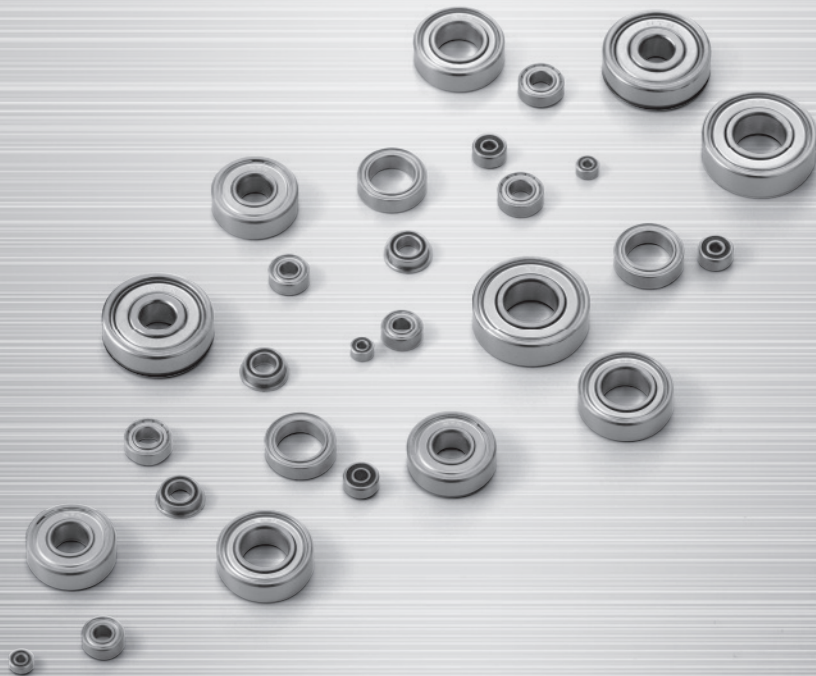

Open type

Shielded type

Shielded type with snap ring

1. Design features and characteristics

The dimensional range of miniature and small size ball bearings can be found in **Table 1**. Boundary dimensions for both metric and inch series are in accordance with the internationally specified ISO and ANSI/ABMA standards. The most widely used sealed and shielded type ball bearings generally have a 1 to 2 mm wider width dimension than open type bearings.

The main variations of these bearings are shown in **Table 2**. Miniature and small size ball bearings can also utilize snap rings, which simplify assembly within the housing. These bearings with snap rings can also be found in the dimensional tables in this catalog.

Among the most generally used sealed and shielded bearings are standard ZZ and ZZA type which incorporate non-contact steel shield plates. **Fig. 1** also shows non-contact type rubber sealed LLB and resin sealed SSA type bearings, as well as the contact-type rubber sealed LLU bearing.

Section "11. Lubrication" provides additional information on grease filled within the sealed and shielded bearings.

Table 1 Dimensional range

Bearing	Dimensional range
Miniature ball bearings	Nominal outside diameter $D < 9$ mm
Small size ball bearings	Nominal bore diameter $d < 10$ mm Nominal outside diameter $D \geq 9$ mm

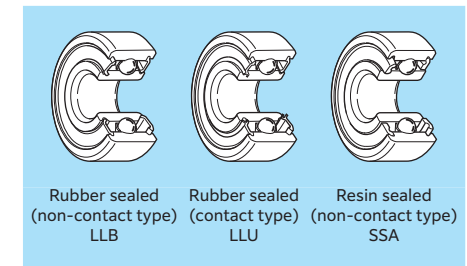


Fig. 1


Table 2 Main types and construction

Type	Standard type code			Flange-attached type code		
	Construction	Metric series	Inch series	Construction	Metric series	Inch series
Open type		6 BC	R		FL6 FLBC	FLR
Shielded type		6 x x ZZ W6 x x ZZ WBC x x x ZZ	RA x x ZZ		FL6 x x x ZZ FLW6 x x x ZZ FLWBC x x x ZZ	FLRA x x ZZ

Note: 1. Representative codes are shown. For further details, please refer to dimension tables.
2. May change to ZA or SA for shielded type bearings, according to the bearing number.

2. Standard cage type

Pressed steel cages are standard for miniature and small size bearings.



3. Dimensional and rotational accuracy

The accuracy of miniature and small size ball bearings complies with JIS standards. Accuracy of these bearings is defined by Table A-54 in section "6. Bearing tolerances". Flange accuracies are listed in **Table 3**.

Table 3 Tolerance and tolerance values for outer ring flange

Unit: μm

Accuracy class	Outside diameter dimensional tolerance ΔD_{1s} or ΔD_{2s}		Outer ring surface runout for rear surface S_{D1} Max.	Back face axial runout S_{ea1} Max.	Width deviation ΔC_{1s} or ΔC_{2s}		Width unevenness V_{C1s} or V_{C2s} Max.	
	Upper	Lower			Upper	Lower		
ISO standard	Class 0	* (see table below)	—	—	Identical to same bearings inner ring ΔB_s .		Identical to same bearings inner ring V_{Bs} .	
	Class 6		—	—				
	Class 5		8	11				5
	Class 4		4	7				2.5
	Class 2		1.5	3 ¹⁾ 4				1.5

1) Applies to nominal outside diameter D of 18 mm or less.

* Unit: μm

Flange nominal outside diameter D_1 or D_2 mm		Outside diameter dimensional tolerance ΔD_{1s} or ΔD_{2s}	
Over	Incl.	Upper	Lower
—	10	+220	-36
10	18	+270	-43
18	30	+330	-52
30	50	+390	-62

4. Radial internal clearance

Radial internal clearance is defined by Table A-88 in section "8. Bearing internal clearance and preload".

The radial clearance values for high precision miniature and small size ball bearings can be found in **Table 4**.

Table 4 Radial internal clearance for high precision bearings

Unit: μm


MIL Standard Code	Tight				Standard						Loose		Extra Loose	
	C2S		CNS		CNM		CNL		C3S		C3M		C3L	
Internal clearance	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
	0	5	3	8	5	10	8	13	10	15	13	20	20	28

Note: 1. These standards are specified in accordance with MIL B-23063. However, **NTN** codes are shown.
2. Clearance values do not include compensation for measuring load.


Miniature and Small Size Ball Bearings




Metric series




Open type




With single shield (Z)



With double shield (ZZ)




Open type with flange (FL)





With flanged OR and single shield (FL...Z)

Miniature and Small Size Ball Bearings



With flanged OR and double shield (FL...ZZ)



Dynamic equivalent radial load
 $P_r = XF_r + YF_a$

$f_0 \cdot F_a / C_{Or}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19				2.30
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1.00

Static equivalent radial load

$P_{0r} = 0.6F_r + 0.5F_a$
 When $P_{0r} < F_r$ use $P_{0r} = F_r$.

d 5-9 mm

d	Boundary dimensions								Basic load rating		Fatigue load limit N C _u	Factor f ₀	Allowable speed	
	mm								dynamic	static			min ⁻¹	
	D	B	B ₁	D ₁	D ₂	C ₁	C ₂	r _{s min} ¹⁾	C _r	C _{0r}			Grease lubrication	Oil lubrication
5	11	—	4	—	12.6	—	0.8	0.15	795	282	11.4	14.0	43 000	51 000
	11	3	5	12.5	12.5	0.8	1	0.15	795	282	11.4	14.0	43 000	51 000
	13	4	4	15	15	1	1	0.2	1 190	430	17.3	13.4	40 000	47 000
	13	—	5	—	15	—	1	0.2	1 190	430	17.3	13.4	40 000	47 000
	14	5	5	16	16	1	1	0.2	1 470	505	20.5	12.8	39 000	46 000
	16	5	5	18	18	1	1	0.3	1 940	680	23.1	12.4	37 000	44 000
19	6	6	—	—	—	—	0.3	2 590	885	64.5	12.1	34 000	40 000	
6	10	2.5	3	11.2	11.2	0.6	0.6	0.1	515	196	5.15	15.2	43 000	51 000
	12	3	4	13.2	13.6	0.6	0.8	0.15	920	365	14.8	14.5	40 000	47 000
	13	3.5	5	15	15	1.0	1.1	0.15	1 200	440	17.5	13.7	39 000	46 000
	15	5	5	17	17	1.2	1.2	0.2	1 490	530	21.3	13.3	37 000	44 000
	16	6	6	—	—	—	—	0.2	1 960	695	28.1	12.7	36 000	42 000
	17	6	6	19	19	1.2	1.2	0.3	2 430	865	35.0	12.3	35 000	42 000
19	6	6	22	22	1.5	1.5	0.3	2 590	885	64.5	12.1	34 000	40 000	
7	11	2.5	3	12.2	12.2	0.6	0.6	0.1	610	269	7.05	15.6	40 000	47 000
	13	3	4	14.2	14.6	0.6	0.8	0.15	915	375	15.2	14.9	38 000	45 000
	14	3.5	5	16	16	1	1.1	0.15	1 300	505	20.4	14.0	37 000	44 000
	17	5	5	19	19	1.2	1.2	0.3	1 780	715	28.8	14.0	35 000	41 000
	19	6	6	—	—	—	—	0.3	2 480	910	60.0	12.9	34 000	40 000
	22	7	7	—	—	—	—	0.3	3 700	1 400	97.0	12.5	32 000	37 000
8	12	2.5	3.5	13.2	13.6	0.6	0.8	0.1	570	252	6.60	15.9	38 000	45 000
	14	3.5	4	15.6	15.6	0.8	0.8	0.15	910	385	15.5	15.2	36 000	43 000
	16	4	5	18	18	1	1.1	0.2	1 780	715	28.8	14.0	35 000	41 000
	19	6	6	22	22	1.5	1.5	0.3	2 200	865	35.0	13.8	33 000	39 000
	22	7	7	25	25	1.5	1.5	0.3	3 700	1 400	97.0	12.5	32 000	37 000
	24	8	8	—	—	—	—	0.3	4 450	1 590	122	11.7	31 000	36 000
9	14	3	4.5	—	—	—	—	0.1	1 020	465	18.8	15.5	36 000	42 000
	17	4	5	19	19	1	1.1	0.2	1 910	820	33.0	14.4	33 000	39 000
	20	6	6	—	—	—	—	0.3	2 750	1 090	44.0	13.5	32 000	38 000
	24	7	7	—	—	—	—	0.3	3 750	1 450	94.5	12.9	31 000	36 000
	26	8	8	—	—	—	—	0.6	5 050	1 960	138	12.4	30 000	35 000

1) Smallest allowable dimension for chamfer dimension r.

Open type	Bearing numbers					Installation-related dimensions				Mass (approx.)	
	With single shield	With double shield	Open type with flange	With flanged OR and single shield	With flanged OR and double shield	mm		r _{as}	Open type	Open type with flange	
	d _a	D _a	r _{as}	Min.	Max. ²⁾	Max.	g				
—	WBC5-11Z	ZZ	—	FLWBC5-11Z	ZZ	6.2	6.8	9.8	0.2	1.8 ³⁾	2 ³⁾
685	W685Z	ZZ	FL685	FLW685Z	ZZ	6.2	6.8	9.8	0.15	1.1	1.3
695A	695AZ	ZZ	FL695A	FL695AZ	ZZ	6.6	6.9	11.4	0.2	2.4	2.7
—	WBC5-13Z	ZZ	—	FLWBC5-13Z	ZZ	6.6	6.9	11.4	0.2	3.4 ³⁾	3.7 ³⁾
605	605Z	ZZ	FL605	FL605Z	ZZ	6.6	7.4	12.4	0.2	3.5	3.9
625	625Z	ZZ	FL625	FL625Z	ZZ	7	7.6	14	0.3	4.8	5.2
635	635Z	ZZ	—	—	—	7	9.5	17	0.3	8	—
676A	WA676AZ	ZZ	FL676A	FLWA676AZ	ZZ	6.6	6.7	9.2	0.1	0.65	0.74
BC6-12	WBC6-12Z	ZZ	FLBC6-12	FLWBC6-12Z	ZZ	7.2	7.9	10.8	0.15	1.3	1.4
686	W686Z	ZZ	FL686	FLW686Z	ZZ	7	7.2	11.8	0.15	1.9	2.2
696	696Z	ZZ	FL696	FL696Z	ZZ	7.6	7.8	13.4	0.2	3.8	4.3
BC6-16A	BC6-16AZ	ZZ	—	—	—	7.6	8	14.4	0.2	5.2	—
606	606Z	ZZ	FL606	FL606Z	ZZ	8	8.6	15	0.3	6	6.5
626	626Z	ZZ	FL626	FL626Z	ZZ	8	9.5	17	0.3	8.1	9.2
677	WA677Z	ZZ	FL677	FLWA677Z	ZZ	7.8	8.1	10.2	0.1	0.67	0.77
BC7-13	WBC7-13Z	ZZ	FLBC7-13	FLWBC7-13Z	ZZ	8.2	8.9	11.8	0.15	1.4	1.5
687A	W687AZ	ZZ	FL687A	FLW687AZ	ZZ	8.2	8.7	12.8	0.15	2.1	2.4
697	697Z	ZZ	FL697	FL697Z	ZZ	9	10	15	0.3	5.2	5.7
607	607Z	ZZ	—	—	—	9	10.4	17	0.3	8	—
627	627Z	ZZ	—	—	—	9	12.2	20	0.3	13	—
678A	W678AZ	ZZ	FL678A	FLWA678AZ	ZZ	8.8	9.1	11.2	0.1	0.75	0.86
BC8-14	WBC8-14Z	ZZ	FLBC8-14	FLWBC8-14Z	ZZ	9.2	9.5	12.8	0.15	1.8	1.9
688A	W688AZ	ZZ	FL688A	FLW688AZ	ZZ	9.6	10	14.4	0.2	3.1	3.5
698	698Z	ZZ	FL698	FL698Z	ZZ	10	10.6	17	0.3	7.3	8.4
608	608Z	ZZ	FL608	FL608Z	ZZ	10	12.2	20	0.3	12	13
628	628Z	ZZ	—	—	—	10	12.1	22	0.3	17	—
679	W679Z	ZZ	—	—	—	9.8	10.4	13.2	0.1	1.4	—
689	W689Z	ZZ	FL689	FLW689Z	ZZ	10.6	10.7	15.4	0.2	3.2	3.6
699	699Z	ZZ	—	—	—	11	11.6	18	0.3	8.2	—
609JX2	609JX2Z	ZZ	—	—	—	11	13.1	22	0.3	14	—
629X50	629X50Z	ZZ	—	—	—	13	13.9	22	0.3	20	—

2) This dimension applies to sealed and shielded bearings. 3) Values for double shielded bearings are shown.