




Double-Row Angular Contact Roller Ring


RW



Highly rigid double-row angular contact roller rings
capable of receiving a load in any direction

Highly rigid double-row angular contact roller rings
capable of receiving a load in any direction

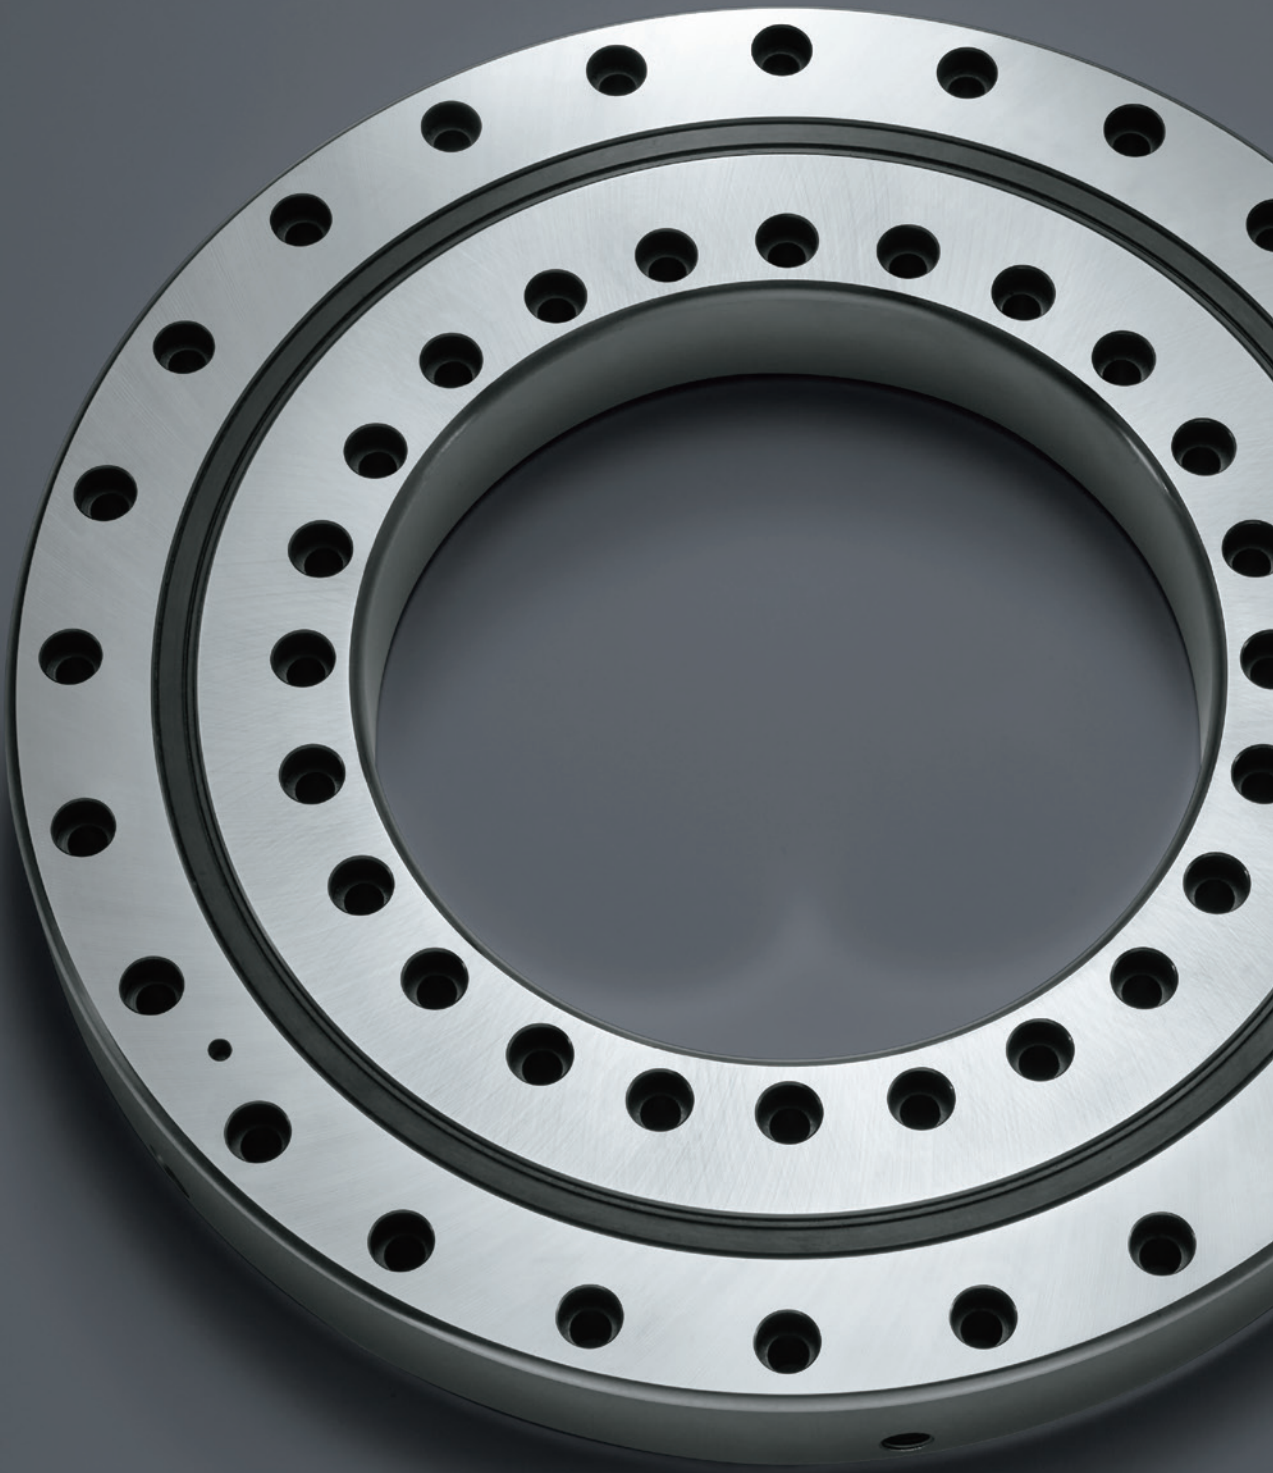

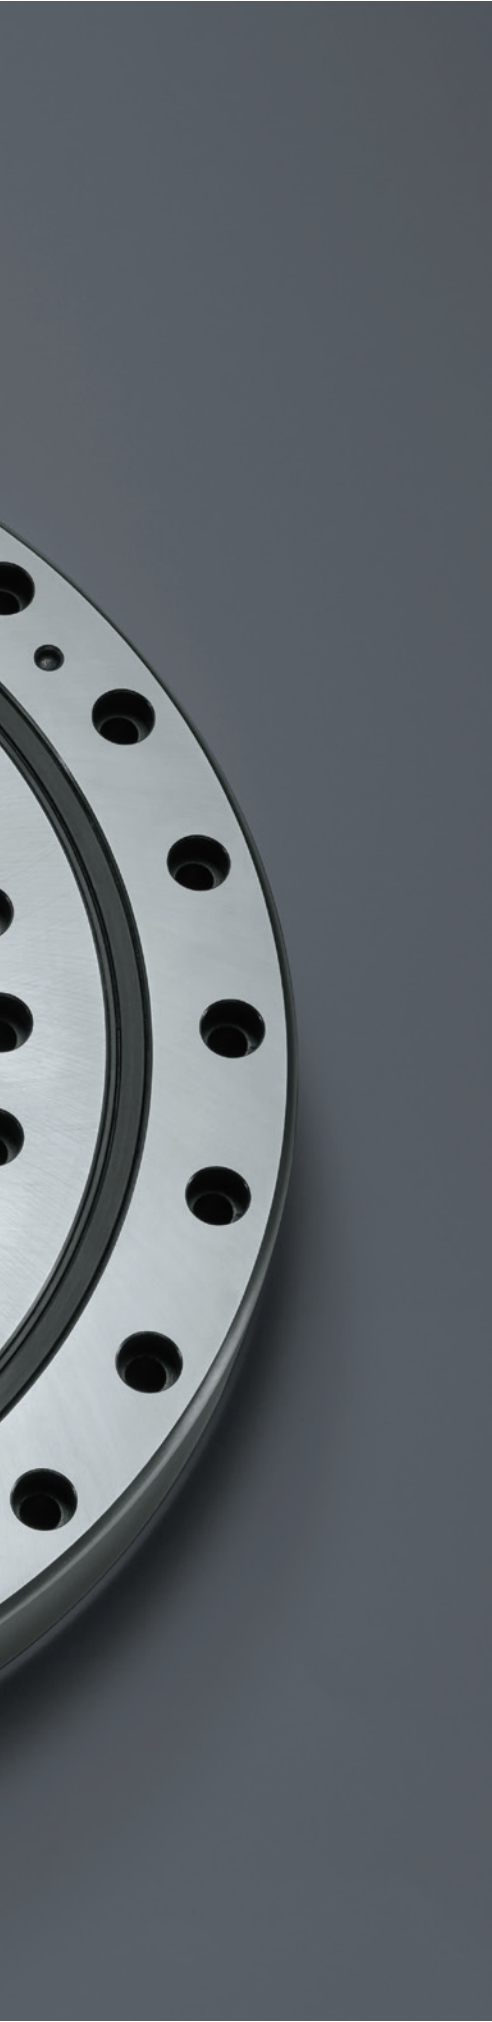

Model **RW**

Boosts rigidity by using more rollers.
Supports high rotational accuracy.

Feature 1 **High Rigidity**

Feature 2 **High Accuracy**

Feature 3 **Easy to Install**

Achieves high rigidity and precision by increasing the number of rollers with a double-row structure. High rigidity and regulated wobbling accuracy make it optimal for rotating mechanisms in machines with multiple functions.

Model RW

Feature 1 High Rigidity

An increased number of rollers achieves high rigidity.

The Model RW uses multiple raceways and small-diameter rollers to increase the overall roller quantity. This achieves much higher rigidity when compared to conventional THK cross roller rings with the same inner and outer dimensions.




Components/Structure

Inner ring (with mounting holes)

Double-row, single-direction rollers

Uses double-row, small-diameter rollers

Outer ring (with mounting holes)

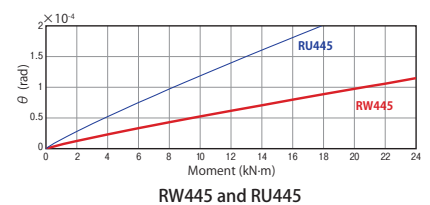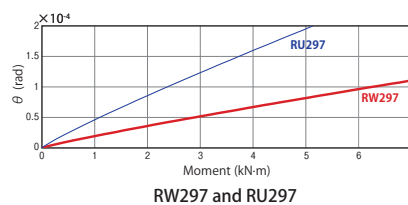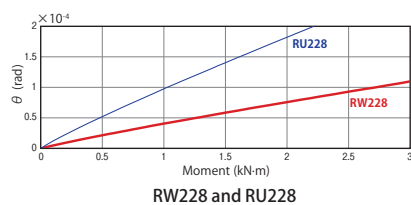

Theoretical Rigidity Comparison

Feature 2 High Accuracy


Wobbling accuracy of 2 μm allows for high rotational accuracy.

With the Model RW, it is possible to specify the wobbling accuracy (runout accuracy) of actual expected heights of operating positions such as machining position and measurement position.

Feature 3 Easy to Install

Mounting holes in the inner and outer rings reduce the number of design steps and components.

The Model RW has mounting holes in the inner and outer rings, eliminating the need for other mounting components and allowing it to attach directly to shafts and housings.

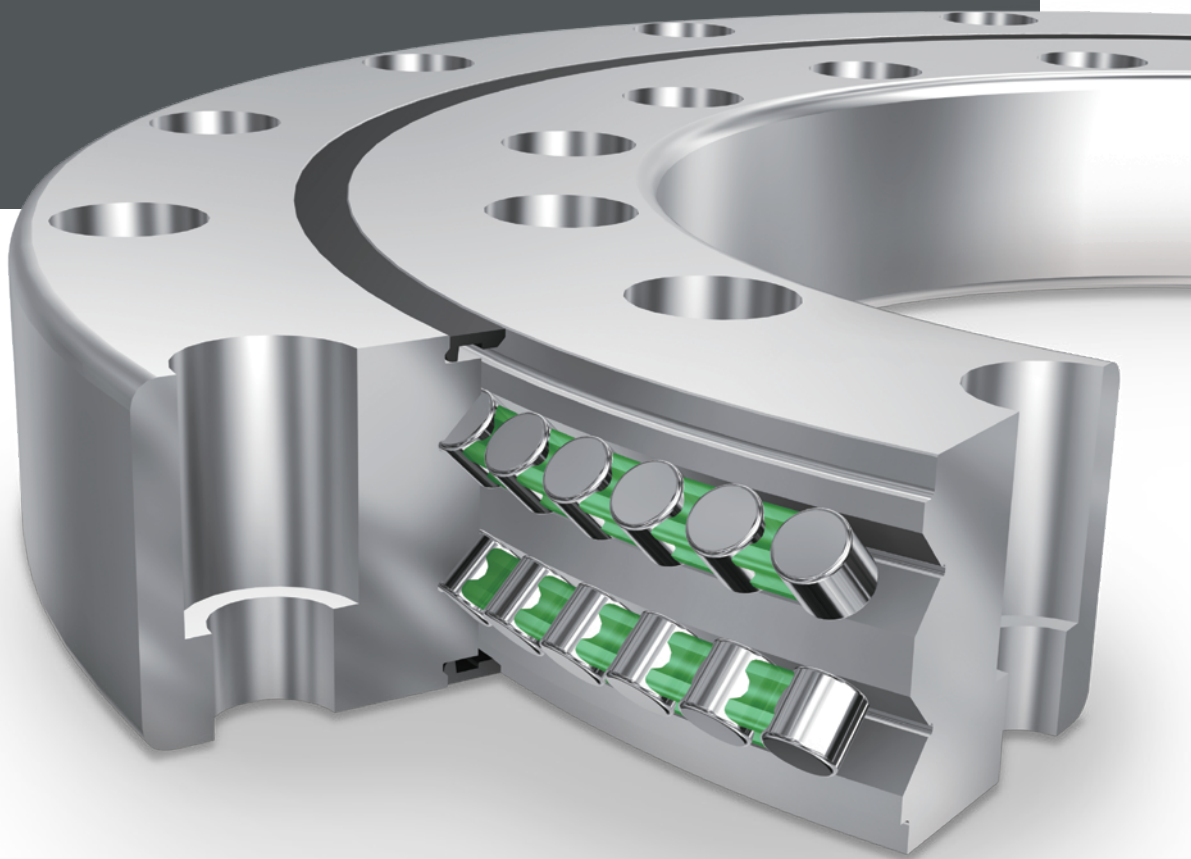

Lineup

Unit: mm

Model No.	Inner diameter	Outer diameter
RW228	160	295
RW297	210	380
RW445	350	540

Available in dimensions other than those listed above. See p. 10 for details.

Model Number Coding

RW297 **UU** **CC0** **P2** **B** **G** **-N**

Model No.

Seal code

No symbol: No seal
 UU: Seals on both sides
 U: Seal on one side
 (outer-ring counterbore side)
 UT: Seal on one side
 (outer-ring non-counterbore side)

Radial clearance symbol

CC0: Negative clearance
 (preload specification)

Accuracy symbol

No symbol: Rotational accuracy grade 5 USP: Rotational accuracy grade USP
 P4: Rotation accuracy grade 4 TSP: Rotational accuracy grade USP
 P2: Rotation accuracy grade 2 + wobbling accuracy

Option Symbols

No symbol: No attached grease nipple
 -N: Grease nipples included (x4)
 (Refer to p. 6 for grease nipple shape)

Mounting hole assembly direction symbol (excludes X type)




No symbol: Counterbores in inner and outer rings
 are in the same direction
 G: Counterbores in inner and outer rings are in
 opposite directions
 X: Inner ring tapped hole

Component accuracy symbol


No symbol: Rotational accuracy of the inner ring
 R: Rotational accuracy of the outer ring
 B: Rotational accuracy of the inner and outer rings

 Select an option Fixed symbol


Specification Table

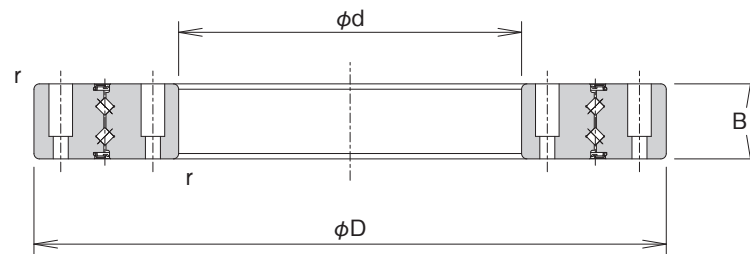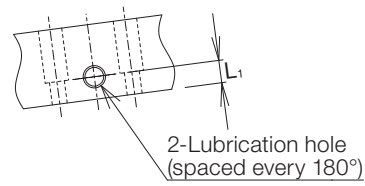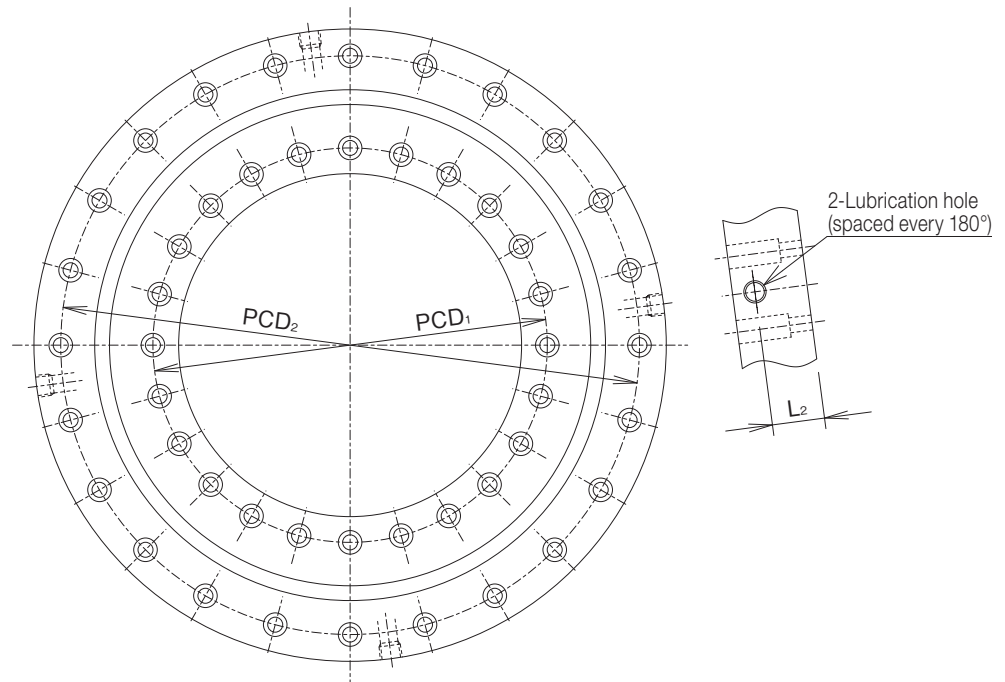

RW228 to RW445





RW228G to RW445G




RW228X to RW445X


Model No.	Main dimensions										
	Inner diameter		Outer diameter		Roller pitch circle diameter	Width		Greasing hole			r _{min}
	d	Tolerance*	D	Tolerance*	dp	B	Tolerance	Hole diameter	L ₁	L ₂	
RW228 (G)	160	0 -0.025	295	0 -0.035	228.8	35	0 -0.100	Rc1/8	10.5	24.5	2
RW228X											
RW297 (G)	210	0 -0.030	380	0 -0.040	299.2	40	0 -0.100	Rc1/8	12	28	2.5
RW297X											
RW445 (G)	350	0 -0.040	540	0 -0.050	445.4	50	0 -0.150	Rc1/8	15	35	2.5
RW445X											

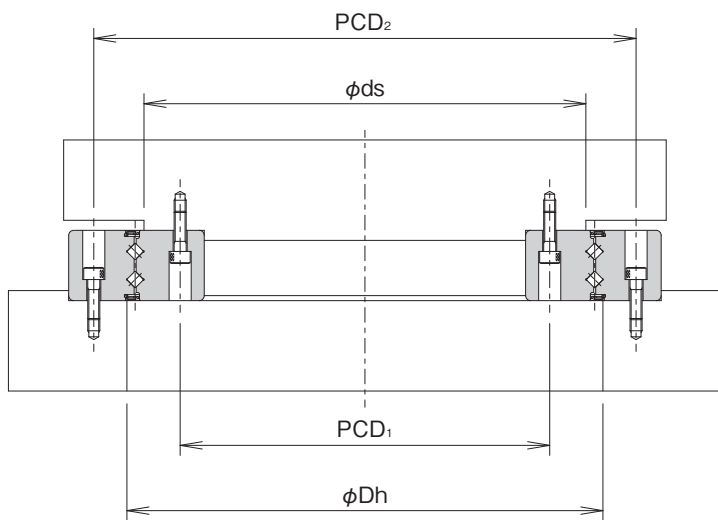


Model RW
Without seals



Model RW (UU Type)
With seals on both sides




Model RW (U Type)
With seal (outer-ring counterbore side)



Model RW (UT Type)
With seal (outer-ring non-counterbore side)

Options

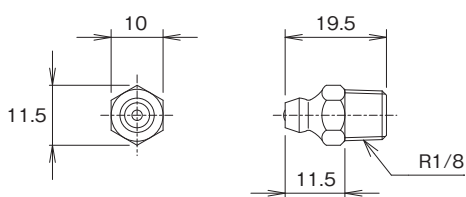

Grease nipple (A-PT1/8)

*Lubrication accessories (piping joints, grease nipples) other than the standard options are also available. Please contact THK if surface treatment is required. (For details about other lubrication accessories, please see the "Accessories for Lubrication" section of the catalog.)

Unit: mm

Shoulder height		Basic load rating (radial)		Weight (kg)	Mounting hole dimensions			
ds	Dh	C	C ₀		Inner ring		Outer ring	
(max)	(min)	(kN)	(kN)		PCD ₁	Mounting hole	PCD ₂	Mounting hole
220	240	58.4	158	12	184	24-φ7 drilled through, φ11 counterbore depth 24.5 24-M6 depth 18 (outer ring counterbore side)	270	24-φ7 drilled through, φ11 counterbore depth 24.5
285	315	101	287	22	240	24-φ9.3 drilled through, φ14.5 counterbore depth 28 24-M8 depth 24 (outer ring counterbore side)	350	24-φ9.3 drilled through, φ14.5 counterbore depth 28
425	465	214	647	47	385	32-φ9.3 drilled through, φ14.5 counterbore depth 35 32-M8 depth 24 (outer ring counterbore side)	505	32-φ9.3 drilled through, φ14.5 counterbore depth 35

* The tolerance of the bearing inner diameter and outer diameter is the arithmetic average of the maximum and minimum diameters obtained by measuring the bearing inner diameter at two points.

Radial Clearance

Radial clearance for the Model RW is adjusted to negative clearance (preload) at the time of shipment and is regulated by starting torque.

Model No.	Starting torque (N·m)	
	Min.	Max.
RW228	1	10
RW297	3	20
RW445	10	65

Note) Starting torque does not include seal resistance.

Accuracy Standards

The Model RW is manufactured with accuracies in accordance with the following tables.

Rotational Accuracy

Rotational Accuracy of the Inner Ring

Unit: μm

Model No.	Radial runout tolerance of the inner ring					Axial runout tolerance of the inner ring				
	P5 Grade	P4 Grade	P2 Grade	USP Grade	TSP Grade	P5 Grade	P4 Grade	P2 Grade	USP Grade	TSP Grade
RW228	8	6	5	2.5	2.5	8	6	5	2.5	2.5
RW297	10	8	5	3	3	10	8	5	3	3
RW445	15	12	7	4	4	15	12	7	4	4

Note) The Model RW has a standard rotational accuracy grade of P5. (This is not shown in the Model No.)

Rotational Accuracy of the Outer Ring

Unit: μm

Model No.	Radial runout tolerance of the outer ring				Axial runout tolerance of the outer ring			
	P5 Grade	P4 Grade	P2 Grade	USP Grade	P5 Grade	P4 Grade	P2 Grade	USP Grade
RW228	18	11	7	4	18	11	7	4
RW297	20	13	8	5	20	13	8	5
RW445	25	16	10	7	25	16	10	7

Note) The Model RW has a standard rotational accuracy grade of P5. (This is not shown in the Model No.)

Wobbling Accuracy (for TSP Grade inner rings only)

The rotational accuracy of the bearing excludes accuracy related to shape (circularity, flatness, etc.), and represents only the rotational deviation of the bearing.


Measurement conditions: measurement height = roller pitch diameter

Wobbling Accuracy

Unit: μm

Model No.	TSP Grade	
	Radial direction	Axial direction
RW228	2	2
RW297	2	2
RW445	2	2

Measuring the Wobbling Accuracy

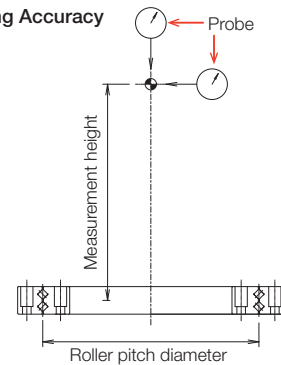

Note: Height is measured from the center of the bearing width.

Peripheral Design

Recommended machining accuracies for peripheral attachments (shafts, housings, etc.) are displayed below.

1. Recommended Machining Accuracies for Paired Components

Standard dimensions d, D (mm)		Circularity/perpendicularity/flatness (μm)
Above	Or less	
120	180	5
180	250	7
250	315	8
315	400	9
400	500	10
500	630	11

Use the table below as a guideline for shaft and housing depths.

2. Shafts and Housing Depths

Unit: mm

Application	Fit depth: H
When positioning accuracy is needed	0.15 to 0.25×B
When loads are large	0.50 to 0.75×B
When high rigidity is needed	0.75 to 1.00×B


The values below are recommended for the bolt holes used to secure paired components.

3. Recommended Bolt Hole Dimensions for Paired Components



Unit: mm

Model No.	Bolt size	Recommended bolt hole dimensions		
		d_1	d_2	h
RW228	M6	7	11	6.5
RW297	M8	9.3	14.5	8.6
RW445	M8	9.3	14.5	8.6

Peripheral Machining Accuracy

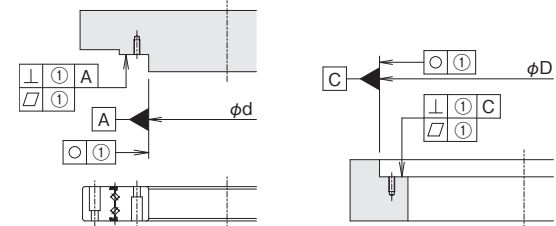

Housing Fit Depth



Fit

The Model RW does not normally need a fitting, but when precise positioning accuracy is required, or if it will operate under a heavy load, we recommend inserting it in a shaft and housing with a fit tolerance of g6 for the shaft and H7 for the hole. If higher rigidity is needed, we recommend measuring the inner and outer diameters of the bearings and applying a slightly tighter fit (about 0 to 5 μm).

*When applying a tight fit, add a removal tap to the shaft and housing.

Lubrication

Recommended lubrication specifications for the Model RW are given in the table below. With standard specifications, the Model RW uses grease lubrication and is filled with THK AFB-LF Grease.

Lubrication Specifications

Lubrication specifications	Lubricant
Grease lubricant	THK AFB-LF grease (standard sealing grease)
Oil lubricant	ISO VG68 oil

*Non-standard greases are also available. Contact THK for details.

AFB-LF Representative Physical Properties

Item	Representative property	Testing method
Consistency enhancer	Lithium-based	
Base oil	Refined mineral oil	
Base oil kinematic viscosity mm^2/s (40°C)	170	JIS K 2220 23
Worked penetration (25°C, 60 W)	275	JIS K 2220 7
Mixing stability (100,000 W)	345	JIS K 2220 15
Dropping point: °C	193	JIS K 2220 8
Evaporation volume: mass% (99°C, 22 h)	0.4	JIS K 2220 10
Oil separation rate: mass% (100°C, 24 h)	0.6	JIS K 2220 11
Copper plate corrosion (B method, 100°C, 24 h)	Passed	JIS K 2220 9
Low-temperature torque $\text{mN}\cdot\text{m}$ (-20°C)	Starting	130
	Rotational	51
4-ball testing (welding load): N	3089	ASTM D2596
Operating temperature range: °C	-15 to 100	
Color	Yellowish brown	

Installation Procedure

Follow this procedure to install the Model RW.

■ Inspecting Components before Installation

Thoroughly clean the housing and other assembly parts, and make sure there are no burrs.


■ Installing the Cross Roller Ring onto a Housing or Shaft

As it is easy for the product to tilt during installation, use a plastic mallet to gradually insert the product by tapping around its outside edge. Continue to hammer carefully until you hear the sound of it making direct contact with the reference surface.

Note) When inserting the inner ring, hammer the inner ring. When inserting the outer ring, hammer the outer ring.

■ Tightening Mounting Bolts

- Installation to devices is done from the raceway wheel on the rotating side.
- After attaching the Model RW to paired components, align the mounting bolts while rotating the Model RW several times.
- Install the mounting bolts. When manually turning the bolts, make sure they do not show skewing caused by misalignment of the holes.
- Bolt tightening should be divided into three or four steps, from temporary tightening to final tightening, moving diagonally between bolts in order. (See figure on right.)
- Tighten the bolts evenly, using a torque wrench set to the values in the table to the right.

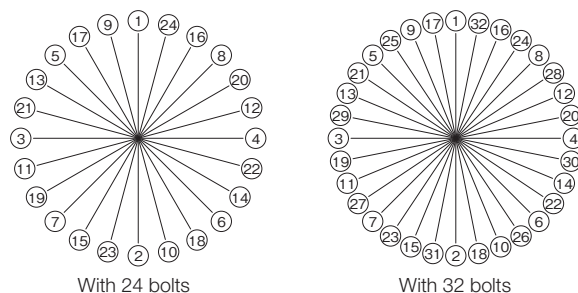

Example Bolt Tightening Order

Bolt Tightening Torque

Model No.	Bolt size	Tightening torque (N·m)
RW228	M6	14
RW297	M8	30
RW445	M8	30

Static Safety Factor

During actual operation, damage may occur from an unexpectedly large load acting on the cross-roller ring that is caused in particular by sudden starting and stopping, vibrations due to a cutting load, or a large moment created by an overhang. Therefore, a static safety factor (f_s) must be considered. The static safety factor (f_s) is obtained from the following formula based on the relationship between the applied load and the basic static load rating. Estimates for the static safety factor are shown below.

$$f_s = \frac{C_0}{P_0}$$

f_s : Static safety factor
 C_0 : Basic static load rating (N)¹
 P_0 : Static equivalent radial load (N)

¹ The basic static load rating C_0 is a static load of a defined direction and size where the calculated contact stress of the roller and the raceway at the contact area under maximum load is 4,000 MPa. (If the contact stress exceeds this level, it will affect the rotation.) This load is indicated as C_0 in the respective dimensional tables.

² In general, factors that cause vibration and impacts include acceleration and deceleration, sudden starts and stops, transmission of vibration and impacts from external devices and machines, and changes in processing force over time.

Static Safety Factor (f_s) (Guideline)


Load conditions ²	Lower limit of f_s
Without vibrations or impacts	2
With vibrations or impacts	5

Static Equivalent Radial Load: P_0

The static equivalent radial load of the Model RW is obtained from the following formula.

$$P_0 = X_0 \cdot \left(F_r + \frac{2M}{dp} \right) + Y_0 \cdot F_a$$

P_0 : Static equivalent radial load (N)
 F_r : Radial load (N)
 F_a : Axial load (N)
 M : Moment (N·mm)
 X_0 : Static radial factor ($X_0=1$)
 Y_0 : Static axial factor ($Y_0=0.44$)
 dp : Roller pitch circle diameter (mm)

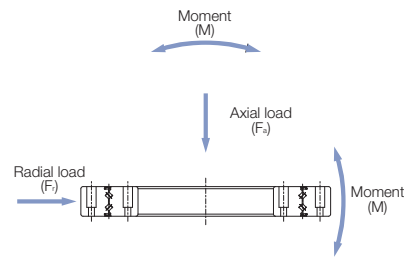

Nominal Life and Service Life Time

Calculating the Nominal Life

The nominal life (L_{10}) is obtained from the following formula using the basic dynamic load rating (C) and the load applied to the RW (P_c).

$$L_{10} = \left(\frac{C}{P_c} \right)^{\frac{10}{3}} \times 10^6$$

L_{10} : Nominal life¹ (rev)
 C : Basic dynamic load rating² (N)
 P_c : Dynamic equivalent radial load (N)

Calculating the modified nominal life

During use, the Model RW may be subjected to vibrations and shocks as well as fluctuating loads, which are difficult to detect. In addition, the operating temperature will have a decisive impact on the service life. Taking these factors into account, the modified nominal life (L_{10m}) can be calculated according to the following formula.

Modified Factor α

$$\alpha = \frac{f_r}{f_w}$$

α : Modified factor
 f_r : Temperature factor
 f_w : Load factor

Modified Nominal Life L_{10m}


$$L_{10m} = \left(\alpha \times \frac{C}{P_c} \right)^{\frac{10}{3}} \times 10^6$$

L_{10m} : Modified nominal life¹ (rev)
 C : Basic dynamic load rating² (N)
 P_c : Dynamic equivalent radial load (N)

¹ Nominal life is determined by load calculations assuming adequate lubrication and ideal assembly conditions. Service conditions such as rocking motion or low-speed motion can have an impact on lubrication status. Consult with THK about the calculation of service life under rocking motion or low-speed motion.

² The basic dynamic load rating (C) indicates the radial load for which the nominal life is one million rotations when a group of identical Model RW units independently operate under that load when it is applied with a constant direction and magnitude. The basic dynamic load ratings (C) are indicated in the specification tables.

Temperature Factor (f_r)



Note) The normal service temperature is 80°C or below. If the product is to be used at a higher temperature, contact THK.

Load Factor (f_w)

Usage conditions	f_w
With smooth motion and no impacts	1 to 1.2
With normal motion	1.2 to 1.5
With severe impacts	1.5 to 3


Dynamic Equivalent Radial Load P_c

The dynamic equivalent radial load of the Model RW is obtained from the following formula.

$$P_c = X \cdot \left(F_r + \frac{2M}{dp} \right) + Y \cdot F_a$$

P_c : Dynamic equivalent radial load (N)
 F_r : Radial load (N)
 F_a : Axial load (N)
 M : Moment (N·mm)
 X : Dynamic radial factor
 Y : Dynamic axial factor
 dp : Roller pitch circle diameter (mm)

- When $F_r = 0$ (N) and $M = 0$ (N·mm), perform the calculation assuming that $X = 0.67$ and $Y = 0.67$.
- For service life calculation with a preload taken into account, contact THK.

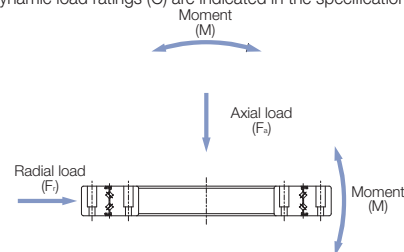

Dynamic Radial Factor and Dynamic Axial Factor

Category	X	Y
$\frac{F_a}{F_r + 2M/dp} \leq 1.5$	1	0.45
$\frac{F_a}{F_r + 2M/dp} > 1.5$	0.67	0.67

Calculating the Service Life Time

The nominal life of the Model RW is obtained using the following formula.

For Rotary Motion

$$L_h = \frac{L_{10}}{n_r \times 60}$$

L_h : Service life time (h)
 n_r : Revolutions per minute (min⁻¹)

Production by Special Order

The following dimensions are also available from THK. Contact THK for details.

Dimensions Available for Production by Special Order Unit: mm

Inner diameter	Outer diameter
100	185
120	210
150	240
180	280
200	300
260	385
325	450
395	525
460	600
580	750
650	870

Handling

- (1) Please use at least two people to move any product weighing 20 kg or more, or use a dolly or another method of conveyance. Otherwise, it may cause injury or damage the unit.
- (2) Do not disassemble the double-row angular contact roller ring.
- (3) Make sure the double-row angular contact roller ring is not dropped or subjected to any sudden impact. Otherwise, it may cause injury or damage the unit. Even if there is no outward indication of damage, a sudden impact could prevent the unit from functioning properly.
- (4) Wear appropriate safety gear, such as protective gloves and safety shoes, when handling the product.

Precautions on Use

- (1) Prevent foreign materials, such as cutting chips or coolant, from entering the product. Failure to do so could damage the product.
- (2) Prevent foreign materials, such as cutting chips, coolant, corrosive solvents, or water from getting in the product by using a bellows or cover when the product is used in an environment where such a thing is likely.
- (3) Do not use this product if the external temperature exceeds 80°C. If used above this temperature, there is a risk that the resin and rubber parts may deform or become damaged.
- (4) If foreign materials such as cutting chips adhere to the product, replenish the lubricant after washing the product.
- (5) Slight oscillations can inhibit the formation of an oil film between the raceways and the area of contact for the balls, resulting in fretting. We recommend periodically rotating the double-row angular contact roller ring several times to help ensure that a film forms on the surfaces and rolling elements.
- (6) Please be aware that the double-row angular contact roller ring seals are dust seals and may be unable to prevent the ingress of very fine particles and liquids.
- (7) Do not forcibly drive a pin, key, or other positioning device into the product. This could create indentations on the raceway and impair the product's function.
- (8) When installing the double-row angular contact roller ring to a housing, if the inner ring is fixed, hammer the inner ring to insert it. If the outer ring is fixed, hammer the outer ring. Hammering the non-fixed side may cause damage to the unit.
- (9) If the mounting material lacks sufficient rigidity or accuracy, the bearing load may be focused in one area, and bearing functionality will dramatically decrease. Therefore, consider carefully the rigidity and accuracy of the housing and base, and the strength of the securing bolts.

Lubrication

- (1) Do not mix different lubricants. Even grease containing the same type of thickening agent may, if mixed, interact negatively due to disparate additives or other ingredients.
- (2) When using the product in locations exposed to constant vibrations or in special environments such as in clean rooms, vacuums, and low/high temperatures, use a lubricant suitable for its use/environment.
- (3) Grease viscosity can vary depending on the temperature. Please keep in mind that the torque of the double-row angular contact roller ring may be affected by changes in viscosity.
- (4) Since the double-row angular contact roller ring unit contains lithium soap group grease No. 2, you can start using the product without replenishing grease. However, the product requires regular lubrication, since it has a smaller internal space than ordinary roller bearings and because the rollers need frequent lubrication due to their rolling contact structure. To replenish grease, it is necessary to provide greasing holes that lead to the oil grooves formed on the inner and outer rings. Regularly resupply grease of the same group so that it is distributed throughout the interior of the bearing at least every three to six months. The final greasing interval/amount should be set at the actual machine. When the bearing is filled up with grease, the initial rotational torque temporarily increases. However, surplus grease will run off of the seals and the torque will return to a normal level after a short period of time.
- (5) Excess grease may protrude from the outside edge of the double-row angular contact roller ring. The structure of peripheral components will require careful consideration if contamination due to grease around the edges of the device is a concern.
- (6) When planning to use a special grease or a lubricant other than grease, please contact THK.

Storage

When storing the double-row angular contact roller ring, enclose it in a package designated by THK and store it in a room in a horizontal orientation while avoiding high temperatures, low temperatures, and high humidity. Please note that if the product has been kept in storage for an extended period, the lubricant inside may have deteriorated. Please ensure that you replenish the lubricant before using.

Disposal

The product should be treated as industrial waste and disposed of appropriately.

Double-Row Angular Contact Roller Ring **RW**

●“LM Guide” and “” are registered trademarks of THK CO., LTD.

- The actual products may differ from the pictures and photographs in this catalog.
- Outward appearances and specifications are subject to change without notice for the purpose of improvement. Please consult with THK before using.
- Although great care has been taken in the production of this catalog, THK will not take any responsibility for damage resulting from typographical errors or omissions.
- For exports of our products and technologies and sales for export, our basic policy is to comply with the Foreign Exchange and Foreign Trade Act and other laws and regulations. Please consult us in advance if you want to export our products by the piece.

All rights reserved

THK CO., LTD.

Global Headquarters 2-12-10 Shibaura, Minato-ku, Tokyo 108-8506 Japan

International Sales Department Phone: +81-3-5730-3860

www.thk.com
