



Ordering method

Model	Acceleration/deceleration specifications	Lead	Shape ^{Note 1}	Motor specification	Side cover	Stroke ^{Note 2}	Cable length ^{Note 3}	Cable entry location	Robot positioner	Driver: Power capacity	I/O	Battery ^{Note 4}
AGXS05	No entry: Standard H: High agility	20: 20 mm 10: 10 mm 5: 5 mm	S: Straight R: Right bending L: Left bending	S: Standard/With no brake BK: Standard/With brake BL: Battery-less absolute/With no brake BKBL: Battery-less absolute/With brake	No entry: Standard W: With T-groove (both sides) R: With T-groove (right side) L: With T-groove (left side)	50 to 800 (50mm pitch)	R3: 3 m R5: 5 m R10: 10 m	R: From rear of motor F: From front of motor	EP-01	A10: 200W or less	EP: EtherNet/IP™ PT: PROFINET ES: EtherCAT NS: NPN CC: CC-Link	B: With battery N: None

Note 1. When the shape is bending (R, L), the high acceleration/deceleration specifications cannot be selected.

Note 2. For the high acceleration/deceleration specifications, the stroke is 50 to 550 mm (50 mm pitch).

Note 3. The robot cable is flexible and resists bending.

Note 4. When the motor specification is the standard (S, BK), whether to use the battery needs to be selected.

Specifications

AC servo motor output	50 W
Repeatability ^{Note 1}	+/-0.005 mm
Deceleration mechanism	Ground ball screw $\phi 12$ (C5 class)
Stroke	50 mm to 800 mm (50 mm pitch)
Maximum speed ^{Note 2}	1333 mm/sec 666 mm/sec 333 mm/sec
Ball screw lead	20 mm 10 mm 5 mm
Maximum payload	Horizontal: 5 kg Vertical: 2 kg
Rated thrust	41 N 69 N 138 N
Maximum dimensions of cross section of main unit	W 48 mm × H 65 mm
Overall length	Straight: ST + 195 mm Bending: ST + 161.5 mm
Degree of cleanliness ^{Note 3}	ISO CLASS 3 (ISO14644-1) or equivalent
Intake air ^{Note 4}	30 N ℓ /min to 100 N ℓ /min
Position detector	Absolute encoder Battery-less absolute encoder
Resolution	23 bits
Using ambient temperature and humidity	0 to 40 °C, 35 to 80 %RH (non-condensing)

Note 1. Positioning repeatability in one direction.


Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed. If the effective stroke exceeds 600 mm, the ball screw may resonate. (Critical speed)

At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table.

Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.


Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Note. See P.115 for acceleration/deceleration.

Allowable overhang ^{Note}


AGXS05-20

Horizontal installation (Unit: mm)	A	B	C
2kg	898	269	350
5kg	583	112	159



Wall installation (Unit: mm)


A	B	C
2kg	323	234
5kg	119	76



Vertical installation (Unit: mm)

A	C
1kg	452
2kg	217

Static loading moment



MY	MP	MR
24	27	23

Controller

Controller	Operation method
EP-01	I/O point trace/ Remote command

When used with high acceleration or deceleration (High agility mode)

Specifications

Stroke	50 mm to 550 mm (50 mm pitch)
Ball screw lead	20 mm 10 mm 5 mm
Maximum payload	Horizontal: 2 kg Vertical: 1 kg
Maximum acceleration	Horizontal: 11.77 m/s ² (1.2 G) Vertical: 11.77 m/s ² (1.2 G)
Maximum payload	Horizontal: 3 kg Vertical: 2 kg
Maximum acceleration	Horizontal: 11.77 m/s ² (1.2 G) Vertical: 7.17 m/s ² (0.7 G)

Allowable overhang ^{Note}

AGXS05-H20

Horizontal installation (Unit: mm)	A	B	C
1kg	498	324	323
2kg	230	157	150

Wall installation (Unit: mm)

A	B	C
1kg	297	288
2kg	123	120

Vertical installation (Unit: mm)

A	C
1kg	223

AGXS05-H5

Vertical installation (Unit: mm)	A	C
1kg	478	478
3kg	138	138

AGXS05-H10

Horizontal installation (Unit: mm)	A	B	C
1kg	1159	460	645
3kg	381	148	206

Wall installation (Unit: mm)

A	B	C
1kg	606	424
3kg	163	112



Vertical installation (Unit: mm)

A	C
1kg	396
2kg	182

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 550 mm stroke models.

Payload - Acceleration / Deceleration Graph (Estimate)

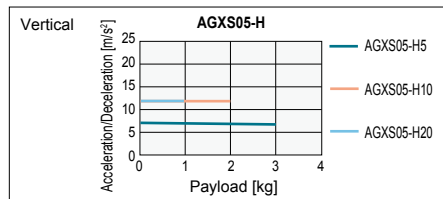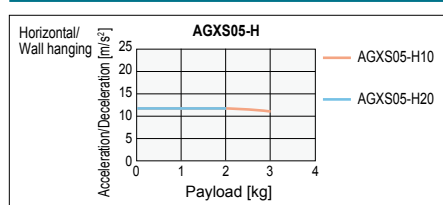

Effective stroke and maximum speed during high acceleration or deceleration

Effective stroke	50	100	150	200	250	300	350	400	450	500	550
Lead 20											1333
Lead 10											666
Lead 5											333

Note. The bending unit cannot be used for the high agility mode.

Note. The high agility mode is used in an effective stroke range of 50 to 550 (50 mm pitch).

Note. There is no critical speed setting. The maximum speed can be set for a selectable stroke.

The speed may not reach the maximum speed if the movement distance is short or depending on the operating conditions.

Note. When the actuator is used with the high acceleration/deceleration specifications, the operation duty and motor load factor need to be considered. (See P.93.)


Note. See P.116 for acceleration/deceleration.

Access the website below.



► The cycle time simulation and service life calculation can be performed easily from our member site. For details, see P.12.

AGXS05 Straight type (S)

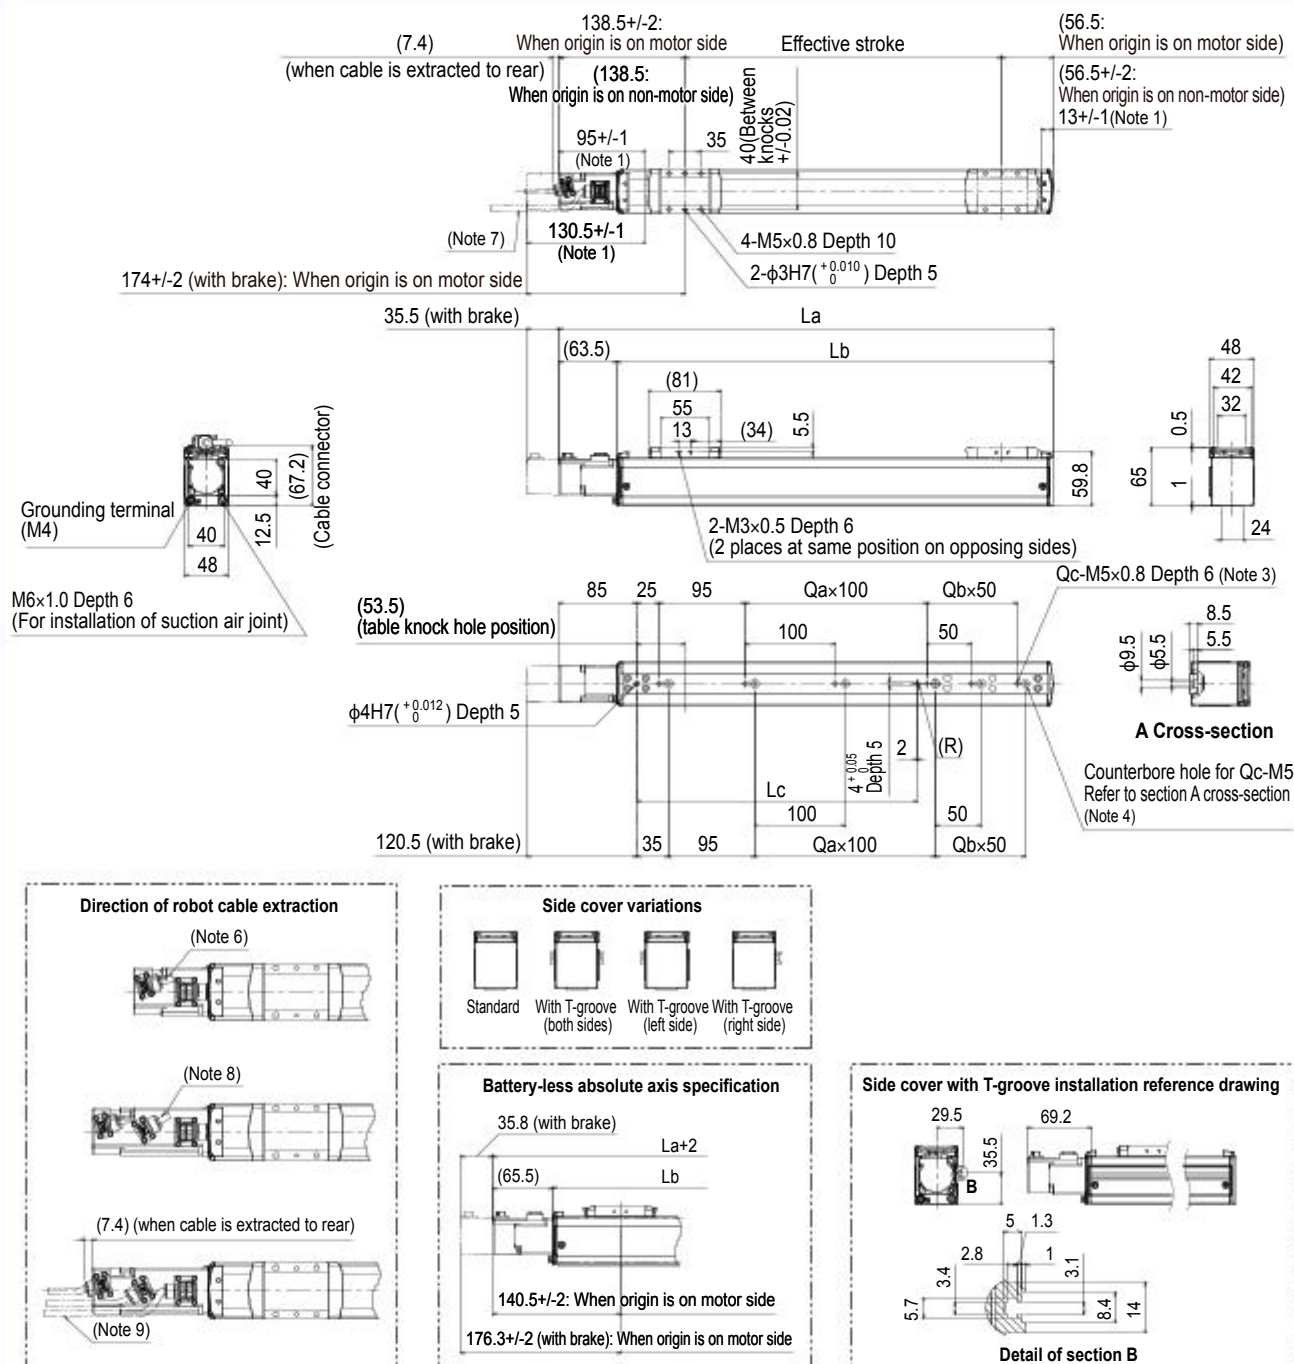


Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)
 Note 3. When using the tap holes to mount the body, remove the set screws first.
 Note 4. When using the counterbore holes (section A cross section) to mount the body, remove the cap from the inner side and then fix. The length under head of the hex socket head bolts (M5 x 0.8) used must be 15 mm or less.
 Note 5. Weight without brake. The weight with the brake is 0.2 kg heavier than the value in the weight column.
 Note 6. The robot cable is extracted from the front.
 Note 7. The robot cable is extracted from the rear.

Note 8. The robot cable (with brake) is extracted from the front.
 Note 9. The robot cable (with brake) is extracted from the rear.
 Note 10. The fixed minimum bending radius of the robot cable is R30. When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.
 Note 11. Side cover with T-groove is used to install the sensor.
 Note 12. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
La	245	295	345	395	445	495	545	595	645	695	745	795	845	895	945	995
Lb	181.5	231.5	281.5	331.5	381.5	431.5	481.5	531.5	581.5	631.5	681.5	731.5	781.5	831.5	881.5	931.5
Lc	110	110	110	110	310	310	310	310	310	310	610	610	610	610	610	610
Qa	0	0	0	0	2	2	2	2	2	2	5	5	5	5	5	5
Qb	0	1	2	3	0	1	2	3	4	5	0	1	2	3	4	5
Qc	2	3	4	5	4	5	6	7	8	9	7	8	9	10	11	12
Weight (kg) Note 5	1.5	1.7	1.8	2.0	2.1	2.3	2.5	2.6	2.8	2.9	3.1	3.2	3.4	3.5	3.7	3.8
Maximum speed (mm/sec)	1333												1066	933	800	666
Lead 20	666												532	466	400	333
Lead 10	333												266	233	200	166
Lead 5	-												80%	70%	60%	50%
Speed setting	-												80%	70%	60%	50%

AGXS05 Bending type (R/L)

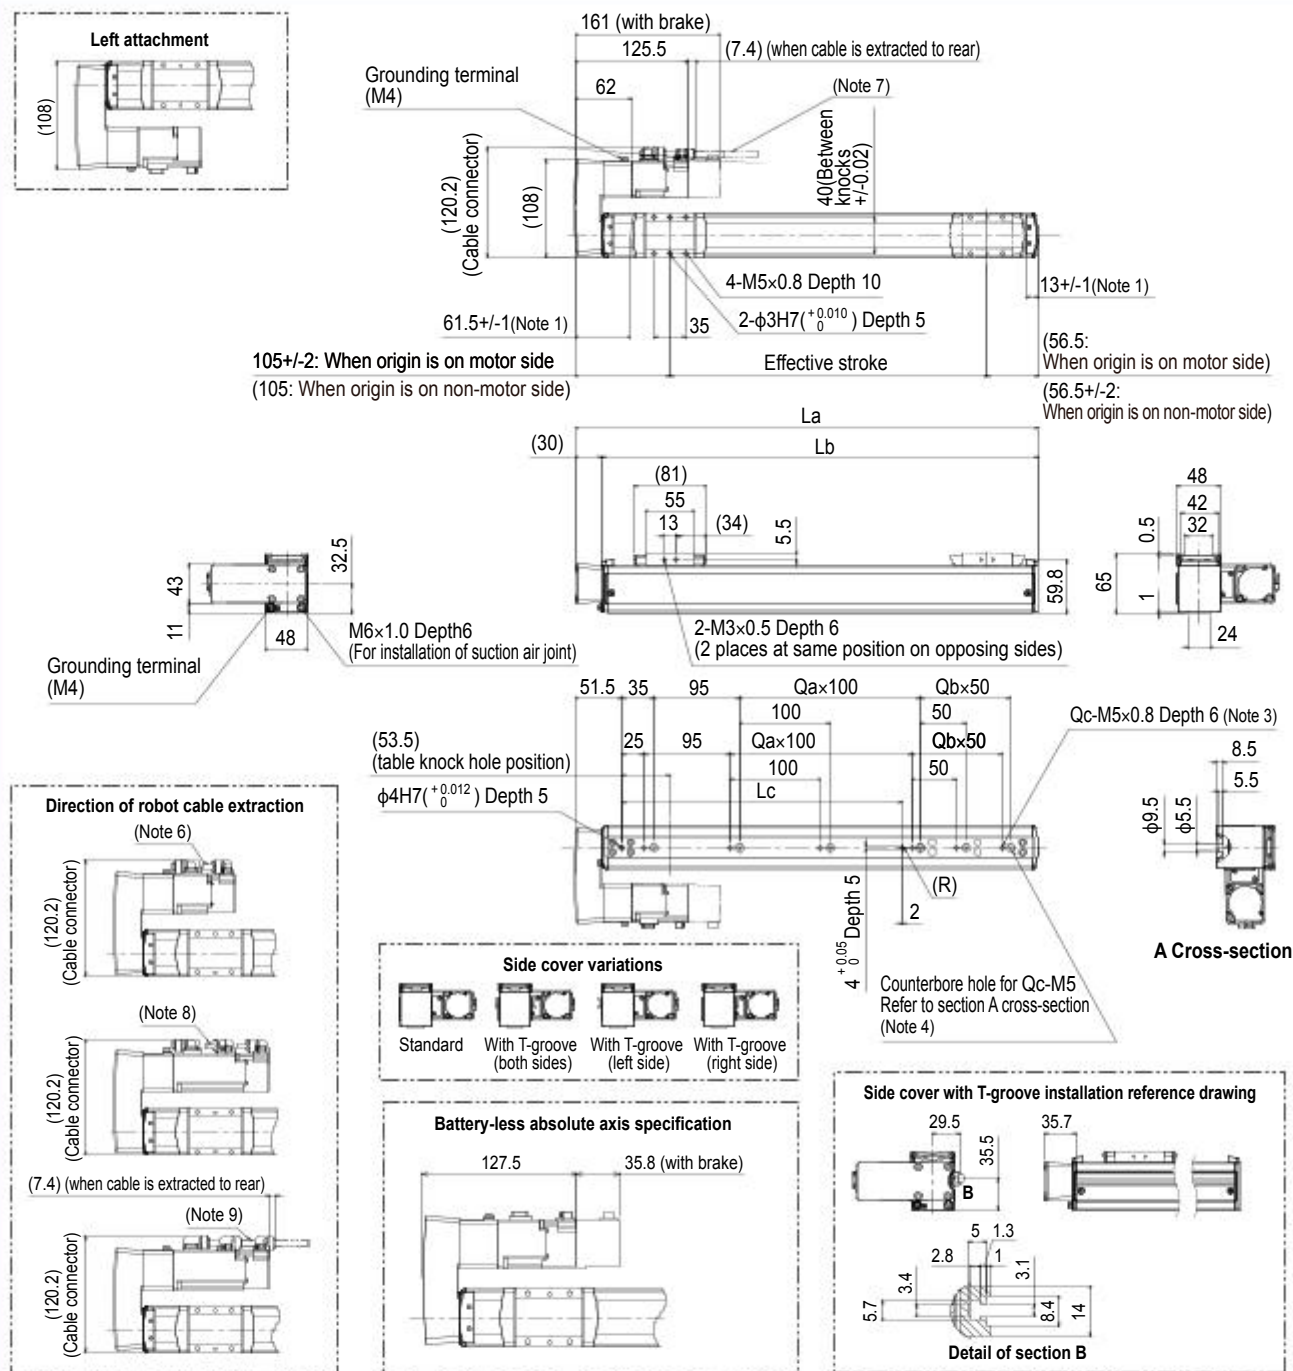

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)
Note 3. When using the tap holes to mount the body, remove the set screws first.
Note 4. When using the counterbore holes (section A cross section) to mount the body, remove the cap from the inner side and then fix. The length under head of the hex socket head bolts (M5 $\times$ 0.8) used must be 15 mm or less.
Note 5. Weight without brake. The weight with the brake is 0.2 kg heavier than the value in the weight column.
Note 6. The robot cable is extracted from the front.
Note 7. The robot cable is extracted from the rear.

Note 8. The robot cable (with brake) is extracted from the front.
Note 9. The robot cable (with brake) is extracted from the rear.
Note 10. The fixed minimum bending radius of the robot cable is R30. When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.
Note 11. Side cover with T-groove is used to install the sensor.
Note 12. When the shape is bending (R, L), the high acceleration/deceleration specifications cannot be selected.
Note 13. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
La	211.5	261.5	311.5	361.5	411.5	461.5	511.5	561.5	611.5	661.5	711.5	761.5	811.5	861.5	911.5	961.5
Lb	181.5	231.5	281.5	331.5	381.5	431.5	481.5	531.5	581.5	631.5	681.5	731.5	781.5	831.5	881.5	931.5
Lc	110	110	110	110	310	310	310	310	310	310	610	610	610	610	610	610
Qa	0	0	0	0	2	2	2	2	2	2	5	5	5	5	5	5
Qb	0	1	2	3	0	1	2	3	4	5	0	1	2	3	4	5
Qc	2	3	4	5	4	5	6	7	8	9	7	8	9	10	11	12
Weight (kg) Note 5	1.9	2.1	2.2	2.4	2.5	2.7	2.9	3.0	3.2	3.3	3.5	3.6	3.8	3.9	4.1	4.2
Maximum speed (mm/sec)																
Lead 20																
Lead 10																
Lead 5																
Speed setting																



Ordering method

Model	Acceleration/deceleration specifications	Lead	Shape	Motor specification	Side cover	Stroke	Cable length	Cable entry location	Robot positioner	Driver Power capacity	Regenerative unit	I/O	Battery
AGXS05L	No entry: Standard H: High agility	20: 20 mm 10: 10 mm 5: 5 mm	S: Straight R: Right bending L: Left bending	S: Standard/With no brake BK: Standard/With brake BL: Battery-less absolute/With no brake BKBL: Battery-less absolute/With brake	No entry: Standard W: With T-groove (both sides) R: With T-groove (right side) L: With T-groove (left side)	50 to 800 (50mm pitch)	R3: 3 m R5: 5 m R10: 10 m	R: From rear of motor F: From front of motor	EP-01	A10: 200W or less	No entry: None R: With EP-RU	EP: EtherNet/IP™ PT: PROFINET ES: EtherCAT NS: NPN CC: CC-Link	B: With battery N: None

Note 1. When the shape is bending (R, L), the high acceleration/deceleration specifications cannot be selected.

Note 2. For the high acceleration/deceleration specifications, the stroke is 50 to 550 mm (50 mm pitch).

Note 3. The robot cable is flexible and resists bending.

Note 4. When the actuator is used vertically and the stroke is 500 mm or more, the regenerative unit is needed.

Note 5. When the motor specification is the standard (S, BK), whether to use the battery needs to be selected.

Specifications

AC servo motor output	100 W
Repeatability	+/-0.005 mm
Deceleration mechanism	Ground ball screw ϕ 12 (C5 class)
Stroke	50 mm to 800 mm (50 mm pitch)
Maximum speed	1333 mm/sec 666 mm/sec 333 mm/sec
Ball screw lead	20 mm 10 mm 5 mm
Maximum payload	Horizontal: 12 kg Vertical: 3 kg
Rated thrust	84 N 169 N 339 N
Maximum dimensions of cross section of main unit	W 48 mm x H 65 mm
Overall length	Straight: ST + 236 mm Bending: ST + 191.5 mm
Degree of cleanliness	ISO CLASS 3 (ISO14644-1) or equivalent
Intake air	30 Nℓ/min to 100 Nℓ/min
Position detector	Absolute encoder Battery-less absolute encoder
Resolution	23 bits
Using ambient temperature and humidity	0 to 40 °C, 35 to 80 %RH (non-condensing)

Note 1. Positioning repeatability in one direction.


Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed. If the effective stroke exceeds 600 mm, the ball screw may resonate. (Critical speed)
At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table.

Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.

Note 4. The required suction amount will vary according to the operating conditions and operating environment.


Note. See P.117 for acceleration/deceleration.

Allowable overhang




AGXS05L-20

Horizontal installation (Unit: mm)	A	B	C
3kg	1755	559	426
8kg	737	200	153
12kg	608	133	104



AGXS05L-10

Horizontal installation (Unit: mm)	A	B	C
6kg	2416	389	333
12kg	1397	187	161
24kg	875	87	74



AGXS05L-5

Horizontal installation (Unit: mm)	A	B	C
10kg	3127	254	225
20kg	1841	120	106
32kg	1554	70	62

Static loading moment

(Unit: N·m)	MY	MP	MR
72	72	72	64

Controller



Controller	Operation method
EP-01	I/O point trace/ Remote command

When used with high acceleration or deceleration (High agility mode)

Specifications

Stroke	50 mm to 550 mm (50 mm pitch)
Ball screw lead	20 mm 10 mm 5 mm
Maximum payload	Horizontal: 5 kg Vertical: 1 kg
Maximum acceleration	Horizontal: 14.72 m/s ² (1.5 G) Vertical: 14.72 m/s ² (1.5 G)
Maximum payload	Horizontal: 10 kg Vertical: 2 kg
Maximum acceleration	Horizontal: 14.72 m/s ² (1.5 G) Vertical: 12.68 m/s ² (1.3 G)
Maximum payload	Horizontal: - Vertical: 4 kg
Maximum acceleration	Horizontal: - Vertical: 6.65 m/s ² (0.7 G)

Payload - Acceleration / Deceleration Graph (Estimate)

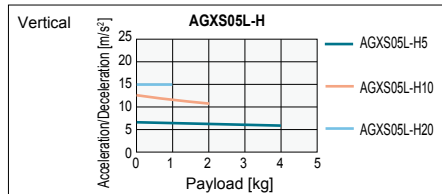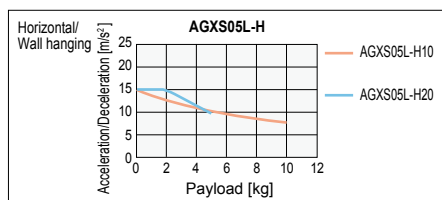

Allowable overhang

Horizontal installation (Unit: mm)	A	B	C
2kg	675	501	332
5kg	330	191	131

Wall installation (Unit: mm)	A	B	C
2kg	294	428	626
5kg	87	118	251

Vertical installation (Unit: mm)	A	C
1kg	728	728

Vertical installation (Unit: mm)	A	C
1kg	1555	1555
2kg	762	762
4kg	365	365

Horizontal installation (Unit: mm)	A	B	C
3kg	1208	469	385
6kg	665	227	188
10kg	441	130	108

Wall installation (Unit: mm)	A	B	C
3kg	331	396	1144
6kg	131	155	580
10kg	49	58	315

Vertical installation (Unit: mm)	A	C
1kg	1298	1298
2kg	636	636

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 550 mm stroke models.

Effective stroke and maximum speed during high acceleration or deceleration

Effective stroke	50	100	150	200	250	300	350	400	450	500	550
Maximum speed (mm/sec)	Lead 20	1333									
	Lead 10	666									
	Lead 5	333									

Note. The bending unit cannot be used for the high agility mode.

Note. The high agility mode is used in an effective stroke range of 50 to 550 (50 mm pitch).

Note. There is no critical speed setting. The maximum speed can be set for a selectable stroke.

The speed may not reach the maximum speed if the movement distance is short or depending on the operating conditions.

Note. When the actuator is used with the high acceleration/deceleration specifications, the operation duty and motor load factor need to be considered. (See P.93.)


Note. See P.118 for acceleration/deceleration.

Access the website below.





► The cycle time simulation and service life calculation can be performed easily from our member site. For details, see P.12.


AGXS05L Straight type (S)

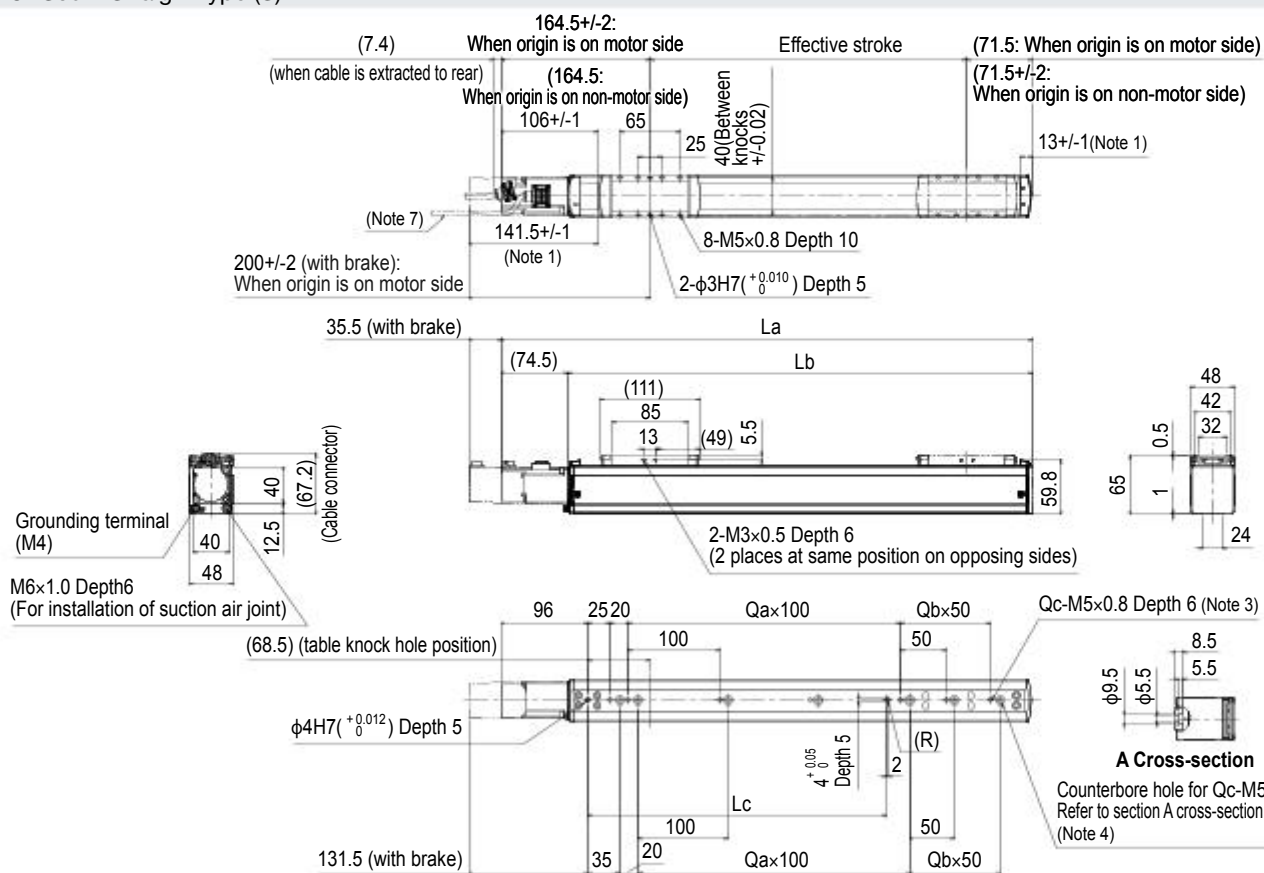


Direction of robot cable extraction




Side cover variations



Battery-less absolute axis specification



Side cover with T-groove installation reference drawing

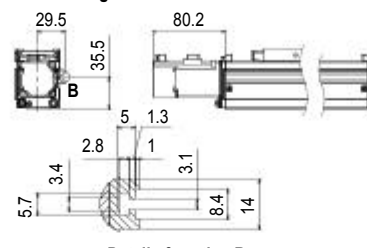

Detail of section B

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)
 Note 3. When using the tap holes to mount the body, remove the set screws first.
 Note 4. When using the counterbore holes (section A cross section) to mount the body, remove the cap from the inner side and then fix. The length under head of the hex socket head bolts (M5 × 0.8) used must be 15 mm or less.
 Note 5. Weight without brake. The weight with the brake is 0.2 kg heavier than the value in the weight column.
 Note 6. The robot cable is extracted from the front.
 Note 7. The robot cable is extracted from the rear.

- Note 8. The robot cable (with brake) is extracted from the front.
 Note 9. The robot cable (with brake) is extracted from the rear.
 Note 10. The fixed minimum bending radius of the robot cable is R30.
 When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.
 Note 11. Side cover with T-groove is used to install the sensor.
 Note 12. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
La	286	336	386	436	486	536	586	636	686	736	786	836	886	936	986	1036
Lb	211.5	261.5	311.5	361.5	411.5	461.5	511.5	561.5	611.5	661.5	711.5	761.5	811.5	861.5	911.5	961.5
Lc	130	130	130	130	330	330	330	330	330	330	630	630	630	630	630	630
Qa	1	1	1	1	3	3	3	3	3	3	6	6	6	6	6	6
Qb	0	1	2	3	0	1	2	3	4	5	0	1	2	3	4	5
Qc	3	4	5	6	5	6	7	8	9	10	8	9	10	11	12	13
Weight (kg) Note 5	1.8	1.9	2.1	2.2	2.4	2.6	2.7	2.9	3.0	3.2	3.3	3.5	3.6	3.8	3.9	4.1
Maximum speed (mm/sec)																
Lead 20																
Lead 10																
Lead 5																
Speed setting																



Ordering method

AGXS07

Model	Acceleration/deceleration specifications	Lead	Shape	Motor specification	Side cover	Stroke	Cable length	Cable entry location	Robot positioner	Driver: Power capacity	Regenerative unit	I/O	Battery
	No entry: Standard H: High agility	30: 30 mm 20: 20 mm 10: 10 mm 5: 5 mm	S: Straight R: Right bending L: Left bending	S: Standard/With no brake BK: Standard/With brake BL: Battery-less absolute/With no brake BKBL: Battery-less absolute/With brake	No entry: Standard W: With T-groove (both sides) R: With T-groove (right side) L: With T-groove (left side)	50 to 1100 (50mm pitch)	R3: 3 m R5: 5 m R10: 10 m	R: From rear of motor F: From front of motor	EP-01	A10: 200W or less	No entry: None R: With EP-RJ	EP: EtherNet/IP™ PT: PROFINET ES: EtherCAT NS: NPN CC: CC-Link	B: With battery N: None

Note 1. When the shape is bending (R, L), the high acceleration/deceleration specifications cannot be selected.

Note 2. For the high acceleration/deceleration specifications, the stroke is 50 to 650 mm (50 mm pitch).

Note 3. The robot cable is flexible and resists bending.

Note 4. When the actuator is used vertically and the stroke is 500 mm or more, the regenerative unit is needed.

Note 5. When the motor specification is the standard (S, BK), whether to use the battery needs to be selected.

Specifications

AC servo motor output	100 W
Repeatability Note 1	+/-0.005 mm
Deceleration mechanism	Ground ball screw ϕ 15 (C5 class)
Stroke	50 mm to 1100 mm (50 mm pitch)
Maximum speed Note 2	1800 mm/sec 1200 mm/sec 600 mm/sec 300 mm/sec
Ball screw lead	30 mm 20 mm 10 mm 5 mm
Maximum payload	Horizontal: 10 kg, 25 kg, 45 kg, 85 kg Vertical: 2 kg, 4 kg, 8 kg, 16 kg
Rated thrust	56 N, 84 N, 169 N, 339 N
Maximum dimensions of cross section of main unit	W 70 mm x H 76.5 mm
Overall length	Straight: ST + 276.5 mm Bending: ST + 232 mm
Degree of cleanliness Note 3	ISO CLASS 3 (ISO14644-1) or equivalent
Intake air Note 4	30 N ℓ /min to 115 N ℓ /min
Position detector	Absolute encoder Battery-less absolute encoder
Resolution	23 bits
Using ambient temperature and humidity	0 to 40 °C, 35 to 80 %RH (non-condensing)

Note 1. Positioning repeatability in one direction.


Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed. If the effective stroke exceeds 700 mm, the ball screw may resonate. (Critical speed)

At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.

Note 4. The required suction amount will vary according to the operating conditions and operating environment.


Note. See P.119 for acceleration/deceleration.

Allowable overhang Note




AGXS07-30

Horizontal installation (Unit: mm)	A	B	C
2kg	3078	1509	1221
6kg	1191	501	418
10kg	957	317	282




Wall installation (Unit: mm)	A	B	C
2kg	1237	1442	2975
6kg	393	435	1062
10kg	244	251	793



Vertical installation (Unit: mm)	A	C
1kg	2335	2335
2kg	1158	1158

Static loading moment



(Unit: N-m)	MY	MP	MR
138		121	121

AGXS07-20

Horizontal installation (Unit: mm)	A	B	C
10kg	1327	370	358
20kg	1136	186	188
25kg	1509	163	173

Wall installation (Unit: mm)	A	B	C
10kg	313	304	1164
20kg	131	119	804
25kg	109	97	1010

Vertical installation (Unit: mm)	A	C
1kg	3416	3416
2kg	1701	1701
4kg	841	841

AGXS07-10

Horizontal installation (Unit: mm)	A	B	C
15kg	2420	338	372
30kg	1531	160	176
45kg	1181	101	111

Wall installation (Unit: mm)	A	B	C
15kg	306	271	2192
30kg	106	94	1155
45kg	39	34	623

Vertical installation (Unit: mm)	A	C
3kg	1688	1688
6kg	827	827
8kg	612	612

AGXS07-5

Horizontal installation (Unit: mm)	A	B	C
30kg	2915	172	197
50kg	2535	96	110
85kg	2024	49	56

Wall installation (Unit: mm)	A	B	C
30kg	122	106	2458
50kg	34	30	1476
85kg	0	0	0

Vertical installation (Unit: mm)	A	C
6kg	907	907
9kg	591	591
16kg	314	314

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.



Note. Service life is calculated for 600 mm stroke models.

When used with high acceleration or deceleration (High agility mode)

Specifications

Stroke	50 mm to 650 mm (50 mm pitch)			
Ball screw lead	30 mm	20 mm	10 mm	5 mm
Maximum payload	5 kg	10 kg	20 kg	-
Maximum acceleration	Horizontal: 14.72 m/s ² (1.5 G)	14.72 m/s ² (1.5 G)	9.64 m/s ² (1 G)	-
Maximum payload	1 kg	2 kg	4 kg	8 kg
Maximum acceleration	Vertical: 14.72 m/s ² (1.5 G)	14.72 m/s ² (1.5 G)	8.44 m/s ² (0.9 G)	4.32 m/s ² (0.4 G)

Payload - Acceleration / Deceleration Graph (Estimate)

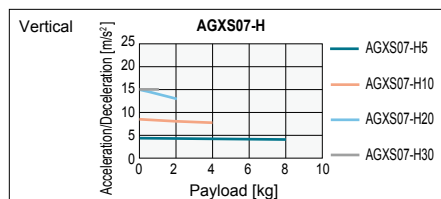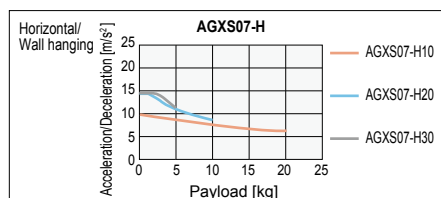

Allowable overhang Note

AGXS07-H30

Horizontal installation (Unit: mm)	A	B	C
2kg	1020	897	608
5kg	461	346	245

Wall installation (Unit: mm)	A	B	C
2kg	579	830	976
5kg	208	279	401

Vertical installation (Unit: mm)	A	C
1kg	1165	1165

AGXS07-H20

Horizontal installation (Unit: mm)	A	B	C
3kg	1224	758	640
6kg	684	369	321
10kg	459	214	190

Wall installation (Unit: mm)	A	B	C
3kg	600	692	1175
6kg	274	303	621
10kg	138	147	376

Vertical installation (Unit: mm)	A	C
1kg	1793	1793
2kg	891	891

AGXS07-H10

Horizontal installation (Unit: mm)	A	B	C
5kg	2208	622	665
12kg	991	249	266
20kg	637	142	152

Wall installation (Unit: mm)	A	B	C
5kg	603	556	2129
12kg	200	182	890
20kg	83	75	497

Vertical installation (Unit: mm)	A	C
1kg	3012	3012
2kg	1487	1487
4kg	725	725

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 600 mm stroke models.

Effective stroke and maximum speed during high acceleration or deceleration

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650
Maximum speed (mm/sec)	Lead 30												
	Lead 20												
	Lead 10												
	Lead 5												

Note. The bending unit cannot be used for the high agility mode.

Note. The high agility mode is used in an effective stroke range of 50 to 650 (50 mm pitch).

Note. There is no critical speed setting. The maximum speed can be set for a selectable stroke.

The speed may not reach the maximum speed if the movement distance is short or depending on the operating conditions.

Note. When the actuator is used with the high acceleration/deceleration specifications, the operation duty and motor load factor need to be considered. (See P.93.)


Note. See P.121 for acceleration/deceleration.

Access the website below.




► The cycle time simulation and service life calculation can be performed easily from our member site. For details, see P.12.


AGXS07 Straight type (S)

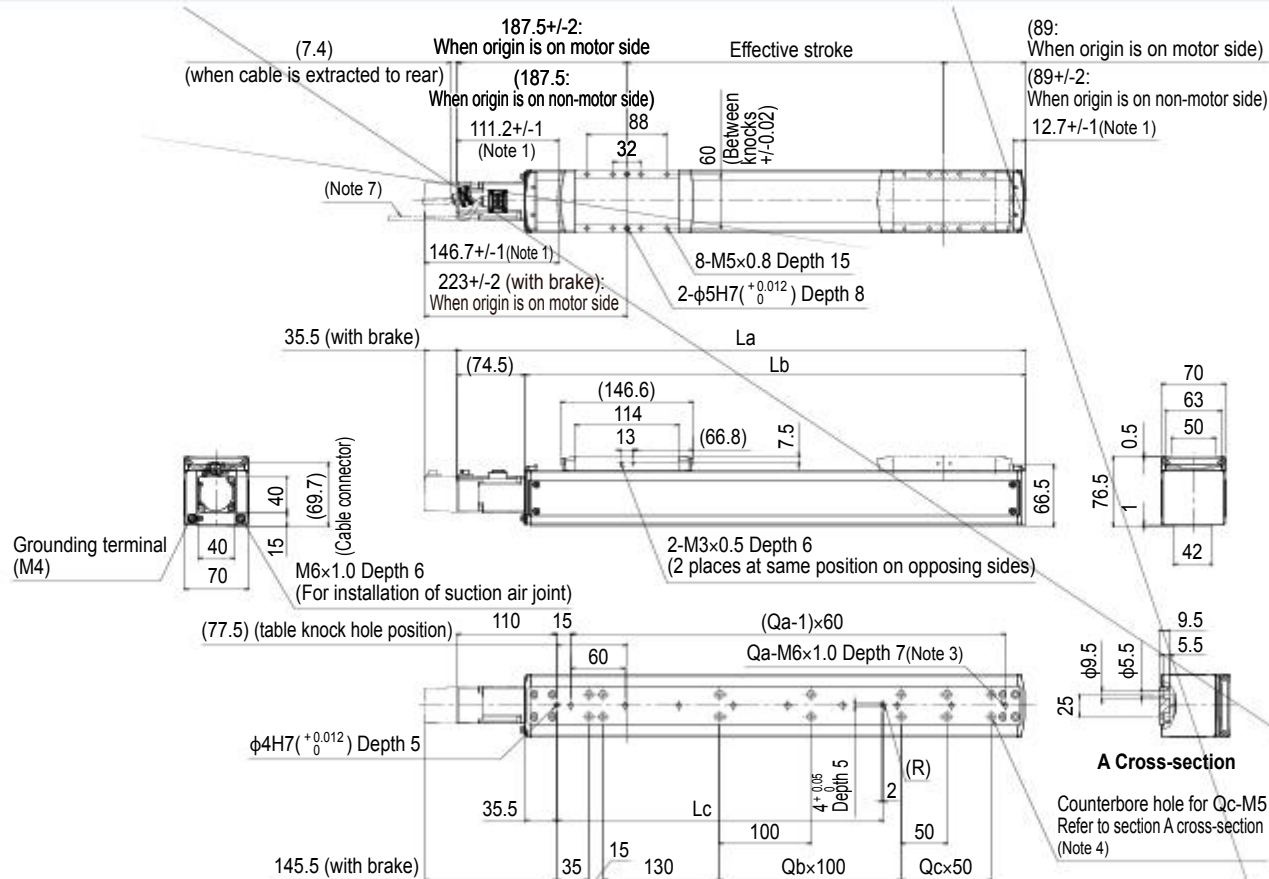


Direction of robot cable extraction

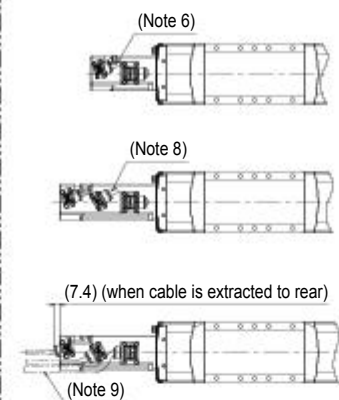


Side cover variations



Battery-less absolute axis specification



Side cover with T-groove installation reference drawing

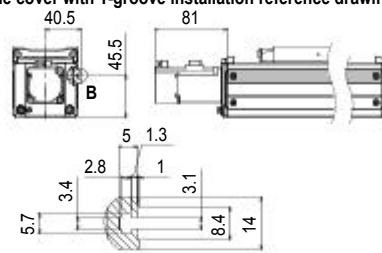


Detail of section B

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)
 Note 3. When using the tap holes to mount the body, remove the set screws first.
 Note 4. When using the counterbore holes (section A cross section) to mount the body, remove the cap from the inner side and then fix. The length under head of the hex socket head bolts (M5 x 0.8) used must be 15 mm or less.
 Note 5. Weight without brake. The weight with the brake is 0.2 kg heavier than the value in the weight column.
 Note 6. The robot cable is extracted from the front.
 Note 7. The robot cable is extracted from the rear.

Note 8. The robot cable (with brake) is extracted from the front.
 Note 9. The robot cable (with brake) is extracted from the rear.
 Note 10. The fixed minimum bending radius of the robot cable is R30.
 When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.
 Note 11. Side cover with T-groove is used to install the sensor.
 Note 12. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke		50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100			
La		326.5	376.5	426.5	476.5	526.5	576.5	626.5	676.5	726.5	776.5	826.5	876.5	926.5	976.5	1026.5	1076.5	1126.5	1176.5	1226.5	1276.5	1326.5	1376.5			
Lb		252	302	352	402	452	502	552	602	652	702	752	802	852	902	952	1002	1052	1102	1152	1202	1252	1302			
Lc		160	160	160	160	360	360	360	360	360	360	360	360	360	760	760	760	760	760	760	760	760	760			
Qa		4	5	5	6	7	8	9	10	10	11	12	13	14	15	15	16	17	18	19	20	20	21			
Qb		0	0	0	0	2	2	2	2	2	2	2	2	6	6	6	6	6	6	6	6	6	6			
Qc		0	1	2	3	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	8	9			
Qd		6	8	10	12	10	12	14	16	18	20	22	24	18	20	22	24	26	28	30	32	34	36			
Weight (kg) Note 5		3.6	3.8	4.1	4.4	4.7	4.9	5.2	5.5	5.7	6.0	6.3	6.6	6.8	7.1	7.4	7.6	7.9	8.2	8.5	8.7	9.0	9.3			
Maximum speed (mm/sec)	Lead 30															1800										
	Lead 20															1200										
	Lead 10															600										
	Lead 5															300										
	Speed setting															—										
																85%	75%	65%	55%	50%	45%	40%	35%			

AGXS07 Bending type (R/L)

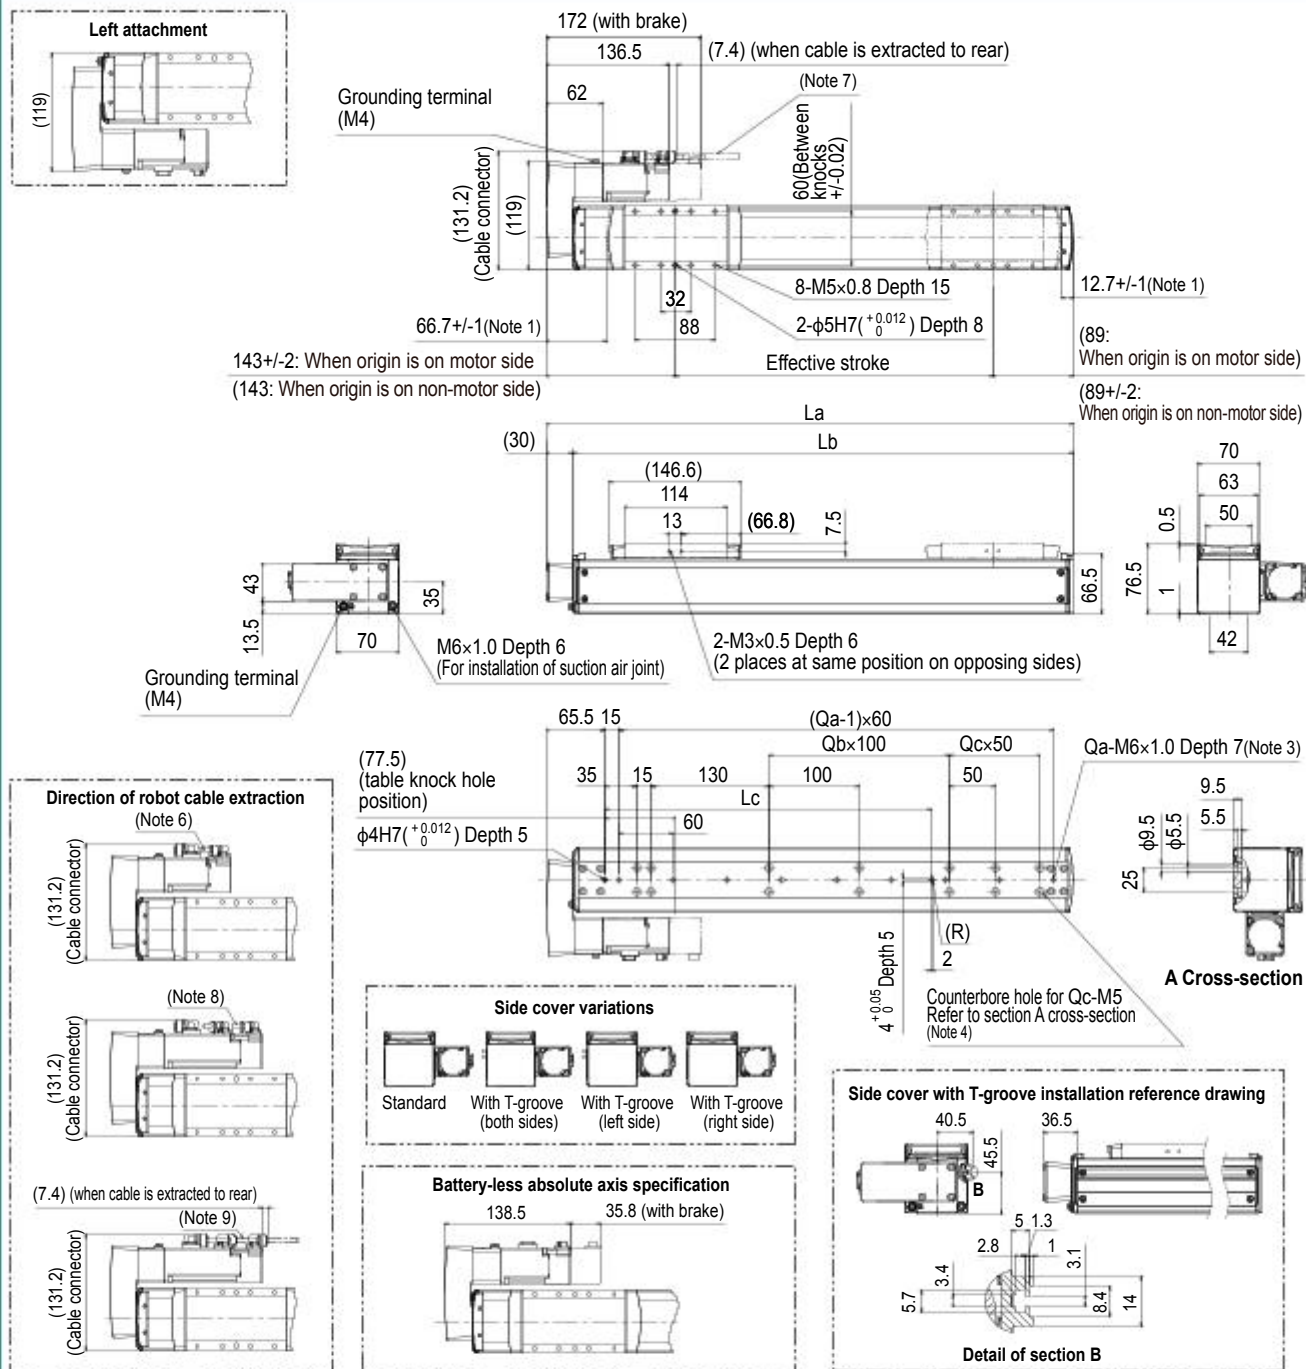

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)
 Note 3. When using the tap holes to mount the body, remove the set screws first.
 Note 4. When using the counterbore holes (section A cross section) to mount the body, remove the cap from the inner side and then fix. The length under head of the hex socket head bolts (M5 x 0.8) used must be 15 mm or less.
 Note 5. Weight without brake. The weight with the brake is 0.2 kg heavier than the value in the weight column.
 Note 6. The robot cable is extracted from the front.
 Note 7. The robot cable is extracted from the rear.

- Note 8. The robot cable (with brake) is extracted from the front.
 Note 9. The robot cable (with brake) is extracted from the rear.
 Note 10. The fixed minimum bending radius of the robot cable is R30.
 When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.
 Note 11. Side cover with T-groove is used to install the sensor.
 Note 12. When the shape is bending (R, L), the high acceleration/deceleration specifications cannot be selected.
 Note 13. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke		50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
	La	282	332	382	432	482	532	582	632	682	732	782	832	882	932	982	1032	1082	1132	1182	1232	1282	3321
	Lb	252	302	352	402	452	502	552	602	652	702	752	802	852	902	952	1002	1052	1102	1152	1202	1252	1302
	Lc	160	160	160	160	360	360	360	360	360	360	360	360	360	760	760	760	760	760	760	760	760	760
	Qa	4	5	5	6	7	8	9	10	10	11	12	13	14	15	15	16	17	18	19	20	20	21
	Qb	0	0	0	0	2	2	2	2	2	2	2	2	6	6	6	6	6	6	6	6	6	6
	Qc	0	1	2	3	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	8	9
	Qd	6	8	10	12	10	12	14	16	18	20	22	24	18	20	22	24	26	28	30	32	34	36
Weight (kg) Note 5		4.0	4.2	4.5	4.8	5.1	5.3	5.6	5.9	6.1	6.4	6.7	7.0	7.2	7.5	7.8	8.0	8.3	8.6	8.9	9.1	9.4	9.7
Maximum speed (mm/sec)	Lead 30	1800														1530	1350	1170	990	900	810	720	630
	Lead 20	1200														1020	900	780	660	600	540	480	420
	Lead 10	600														510	450	390	330	300	270	240	210
	Lead 5	300														255	225	195	165	150	135	120	105
	Speed setting	—														85%	75%	65%	55%	50%	45%	40%	35%



Ordering method

AGXS10

Model	Acceleration/deceleration specifications	Lead	Shape	Motor specification	Stroke	Cable length	Cable entry location	Robot positioner	Driver: Power capacity	Regenerative unit	I/O	Battery
	No entry: Standard H: High agility	30: 30 mm 20: 20 mm 10: 10 mm 5: 5 mm	S: Straight R: Right bending L: Left bending	S: Standard/With no brake BK: Standard/With brake BL: Battery-less absolute/With no brake BKBL: Battery-less absolute/With brake	100 to 1250 (50mm pitch)	Note 3 R3: 3 m R5: 5 m R10: 10 m	R: From rear of motor F: From front of motor	EP-01	A10: 200 W or less	No entry: None R: With EP-RU	EP: EtherNet/IP™ PT: PROFINET ES: EtherCAT NS: NPN CC: CC-Link	B: With battery N: None

Note 1. When the shape is bending (R, L), the high acceleration/deceleration specifications cannot be selected.

Note 2. For the high acceleration/deceleration specifications, the stroke is 100 to 650 mm (50 mm pitch).

Note 3. The robot cable is flexible and resists bending.

Note 4. When the actuator is used vertically, the regenerative unit is needed.

When the actuator is used horizontally and the stroke of lead 10, 20, or 30 is 100 to 800 mm, the regenerative unit is needed.

Note 5. When the motor specification is the standard (S, BK), whether to use the battery needs to be selected.

Specifications

AC servo motor output	200 W
Repeatability Note 1	+/- 0.005 mm
Deceleration mechanism	Ground ball screw ϕ 15 (C5 class)
Stroke	100 mm to 1250 mm (50 mm pitch)
Maximum speed Note 2	1800 mm/sec 1200 mm/sec 600 mm/sec 300 mm/sec
Ball screw lead	30 mm 20 mm 10 mm 5 mm
Maximum payload	Horizontal: 25 kg Vertical: 4 kg
Rated thrust	113 N 170 N 341 N 683 N
Maximum dimensions of cross section of main unit	W 100 mm × H 99.5 mm
Overall length	Straight: ST + 250.5 mm Bending: ST + 220.5 mm
Degree of cleanliness Note 3	ISO CLASS 3 (ISO14644-1) or equivalent
Intake air Note 4	30 Nℓ/min to 90 Nℓ/min
Position detector	Absolute encoder Battery-less absolute encoder
Resolution	23 bits
Using ambient temperature and humidity	0 to 40 °C, 35 to 80 %RH (non-condensing)

Note 1. Positioning repeatability in one direction.


Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed. If the effective stroke exceeds 700 mm, the ball screw may resonate. (Critical speed)

At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table. Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.


Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Note. See P.122 for acceleration/deceleration.


Allowable overhang



AGXS10-30 Horizontal installation (Unit: mm)			
	A	B	C
10kg	878	537	292
20kg	609	256	146
25kg	608	211	124




AGXS10-30 Wall installation (Unit: mm)			
	A	B	C
10kg	271	473	803
20kg	118	192	481
25kg	93	147	454



AGXS10-30 Vertical installation (Unit: mm)		
	A	C
1kg	4135	4135
4kg	985	985

Static loading moment



(Unit: N·m)		
MY	MP	MR
274	274	241

Controller



Controller	Operation method
EP-01	I/O point trace/ Remote command

When used with high acceleration or deceleration (High agility mode)

Specifications

Stroke	100 mm to 650 mm (50 mm pitch)
Ball screw lead	30 mm 20 mm 10 mm 5 mm
Maximum payload	Horizontal: 10 kg Vertical: 2 kg
Maximum acceleration	Horizontal: 19.62 m/s ² (2 G) Vertical: 19.62 m/s ² (2 G)
Maximum deceleration	Horizontal: 11.71 m/s ² (1.2 G) Vertical: 10.84 m/s ² (1.1 G)

Payload - Acceleration / Deceleration Graph (Estimate)

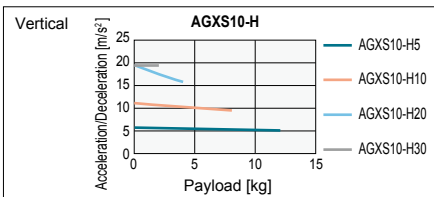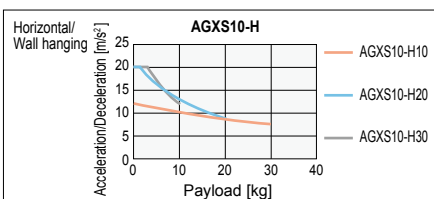

Allowable overhang

AGXS10-H30 Horizontal installation (Unit: mm)			
	A	B	C
3kg	1041	1117	541
6kg	581	534	266
10kg	384	300	153

AGXS10-H30 Wall installation (Unit: mm)			
	A	B	C
3kg	521	1046	1009
6kg	241	466	539
10kg	125	235	327

AGXS10-H30 Vertical installation (Unit: mm)		
	A	C
1kg	2054	2054
2kg	994	994

AGXS10-H5 Vertical installation (Unit: mm)		
	A	C
4kg	1550	1550
8kg	743	743
12kg	474	474

AGXS10-H20 Horizontal installation (Unit: mm)			
	A	B	C
5kg	1218	844	493
12kg	575	326	193
20kg	375	177	106

AGXS10-H20 Wall installation (Unit: mm)			
	A	B	C
5kg	464	778	1177
12kg	159	261	516
20kg	70	113	290

AGXS10-H20 Vertical installation (Unit: mm)		
	A	C
2kg	1602	1602
4kg	788	788

AGXS10-H10 Horizontal installation (Unit: mm)			
	A	B	C
10kg	1851	568	383
20kg	973	263	177
30kg	671	162	109

AGXS10-H10 Wall installation (Unit: mm)			
	A	B	C
10kg	343	504	1784
20kg	136	199	885
30kg	67	98	552

AGXS10-H10 Vertical installation (Unit: mm)		
	A	C
3kg	1849	1849
5kg	1086	1086
8kg	656	656

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 600 mm stroke models.

Effective stroke and maximum speed during high acceleration or deceleration

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650
Maximum speed (mm/sec)												
Lead 30												
Lead 20												
Lead 10												
Lead 5												

Note. The bending unit cannot be used for the high agility mode.

Note. The high agility mode is used in an effective stroke range of 100 to 650 (50 mm pitch).

Note. There is no critical speed setting. The maximum speed can be set for a selectable stroke.

The speed may not reach the maximum speed if the movement distance is short or depending on the operating conditions.

Note. When the actuator is used with the high acceleration/deceleration specifications, the operation duty and motor load factor need to be considered. (See P.93.)


Note. See P.124 for acceleration/deceleration.

Access the website below.



► The cycle time simulation and service life calculation can be performed easily from our member site. For details, see P.12.

AGXS10 Straight type (S)

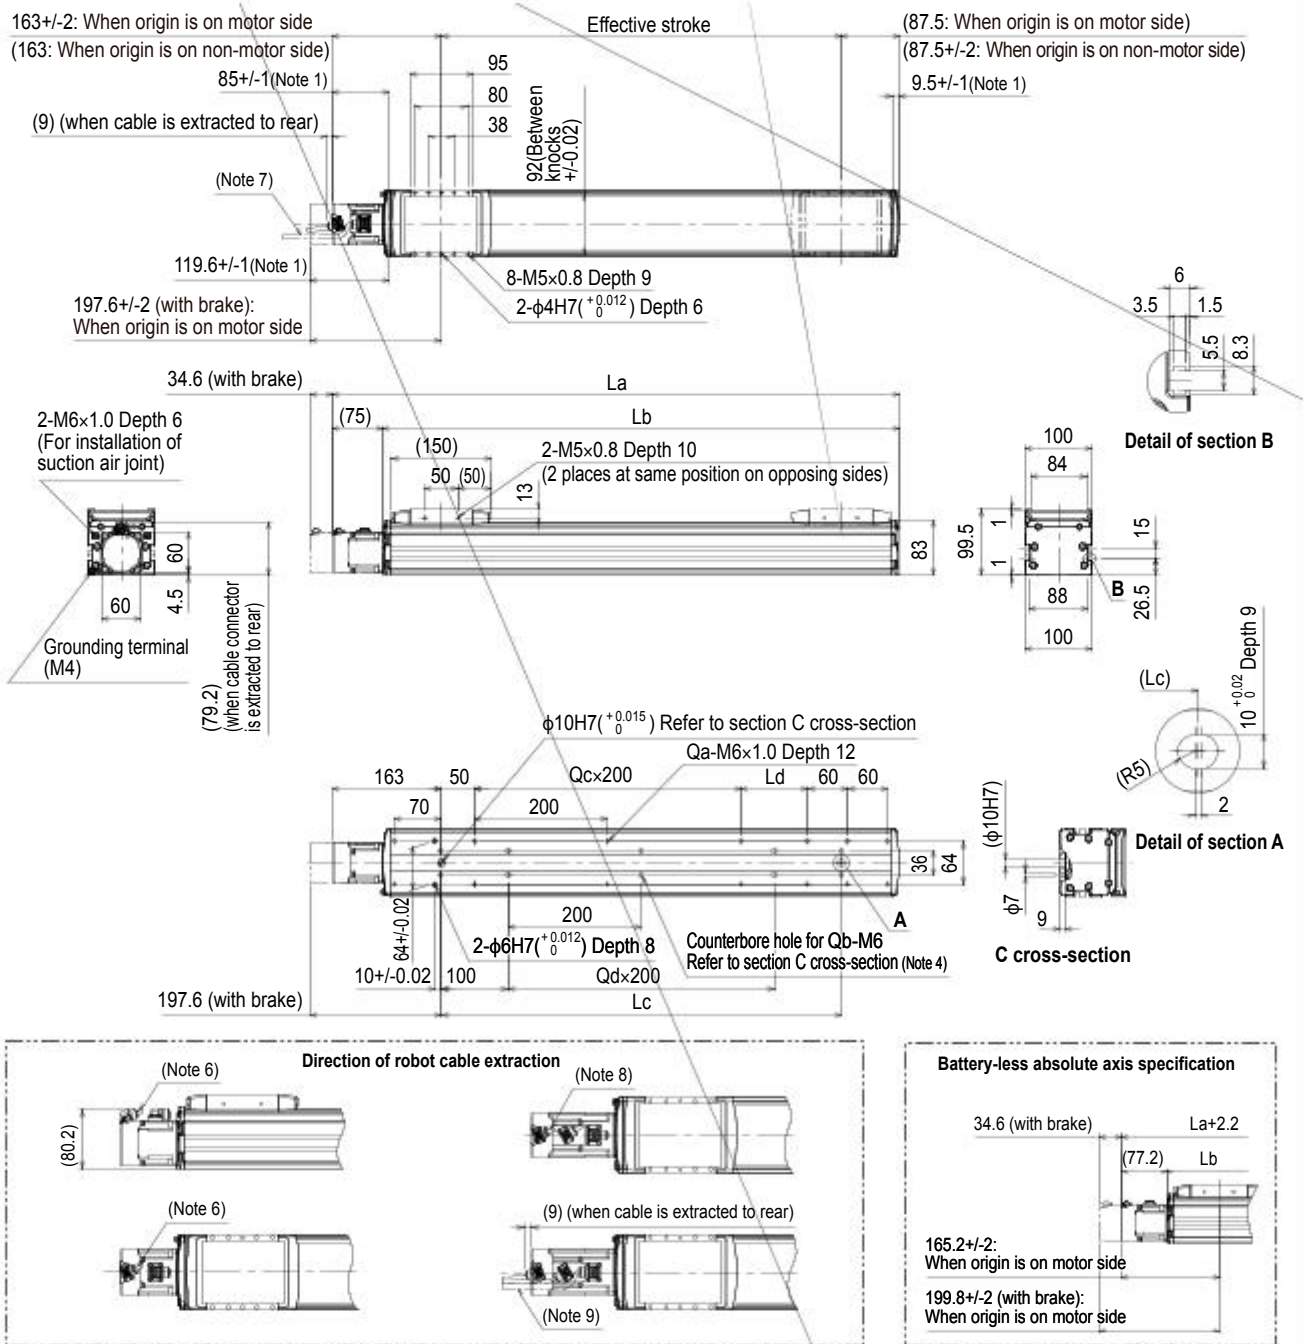

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)

Note 3. The length under head of the hex socket head bolts $<M6 \times 1.0>$ used to mount the body with the mounting counterbore holes (section C cross-section) must be $<<20$ mm or more $>>$. The recommended length under head of the hex socket head bolts $<M6 \times 1.0>$ used to mount the body with the mounting tap hole specifications is $<<frame thickness + 10$ mm or less $>>$.

Note 4. When using the mounting counterbore holes (section C cross-section) to mount the body, remove the seal, and then fix.

Note 5. Weight without brake. The weight with the brake is 0.4 kg heavier than the value in the weight column.

Note 6. The robot cable is extracted from the front.

Note 7. The robot cable is extracted from the rear.

Note 8. The robot cable (with brake) is extracted from the front.

Note 9. The robot cable (with brake) is extracted from the rear.


Note 10. The fixed minimum bending radius of the robot cable is R30.

When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.

Note 11. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
La	350.5	400.5	450.5	500.5	550.5	600.5	650.5	700.5	750.5	800.5	850.5	900.5	950.5	1000.5	1050.5	1100.5	1150.5	1200.5	1250.5	1300.5	1350.5	1400.5	1450.5	1500.5
Lb	275.5	325.5	375.5	425.5	475.5	525.5	575.5	625.5	675.5	725.5	775.5	825.5	875.5	925.5	975.5	1025.5	1075.5	1125.5	1175.5	1225.5	1275.5	1325.5	1375.5	1425.5
Lc	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
Ld	0	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
Qa	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Qb	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	16	16	16	16
Qc	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5
Qd	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5
Weight (kg) Note 5	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.9	10.4	10.9	11.4	11.9	12.4	12.9	13.4	13.9	14.4	14.9	15.4	15.9	16.4	16.9
Lead 30	1800										1530													
Lead 20	1200										1020													
Lead 10	600										510													
Lead 5	300										255													
Speed setting	-										85%													

AGXS10 Bending type (R/L)

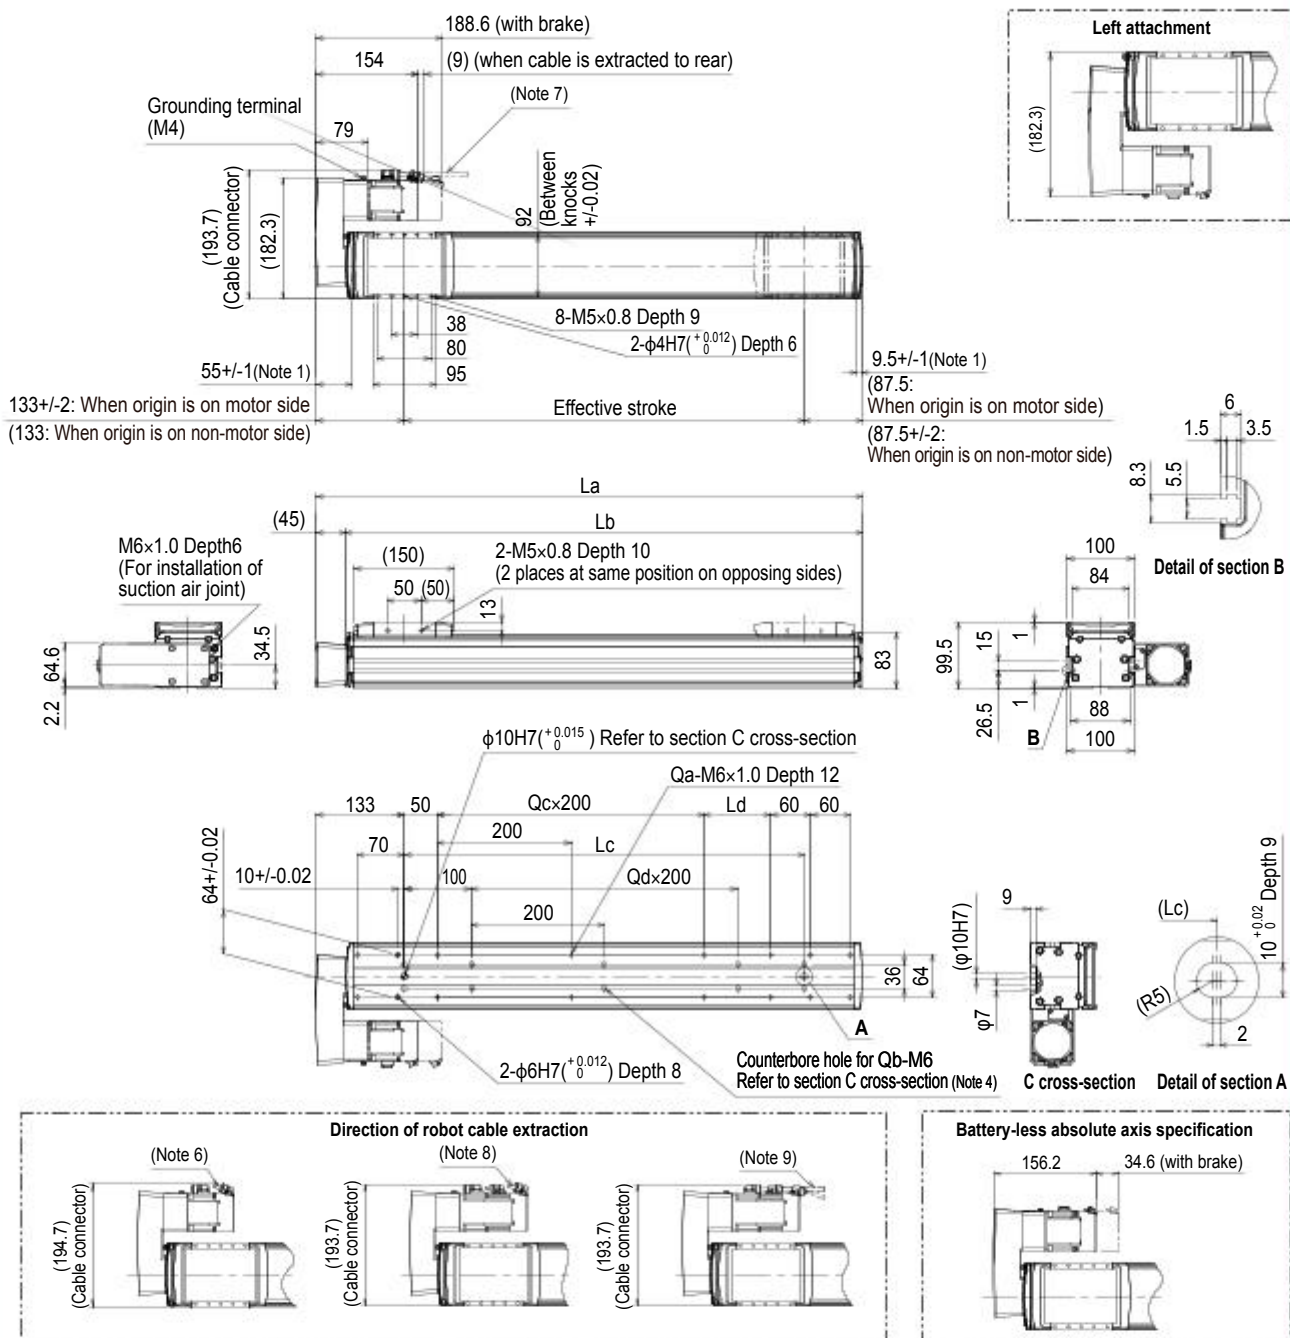

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
- Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)
- Note 3. The length under head of the hex socket head bolts $<M6 \times 1.0>$ used to mount the body with the mounting counterbore holes (section C cross-section) must be $<<20 \text{ mm or more}>>$. The recommended length under head of the hex socket head bolts $<M6 \times 1.0>$ used to mount the body with the mounting tap hole specifications is $<<\text{frame thickness} + 10 \text{ mm or less}>>$.
- Note 4. When using the mounting counterbore holes (section C cross-section) to mount the body, remove the seal, and then fix.
- Note 5. Weight without brake. The weight with the brake is 0.4 kg heavier than the value in the weight column.
- Note 6. The robot cable is extracted from the front.
- Note 7. The robot cable is extracted from the rear.

- Note 8. The robot cable (with brake) is extracted from the front.
- Note 9. The robot cable (with brake) is extracted from the rear.
- Note 10. The fixed minimum bending radius of the robot cable is R30. When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.
- Note 11. When the shape is bending (R, L), the high acceleration/deceleration specifications cannot be selected.
- Note 12. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
La	320.5	370.5	420.5	470.5	520.5	570.5	620.5	670.5	720.5	770.5	820.5	870.5	920.5	970.5	1020.5	1070.5	1120.5	1170.5	1220.5	1270.5	1320.5	1370.5	1420.5	1470.5
Lb	275.5	325.5	375.5	425.5	475.5	525.5	575.5	625.5	675.5	725.5	775.5	825.5	875.5	925.5	975.5	1025.5	1075.5	1125.5	1175.5	1225.5	1275.5	1325.5	1375.5	1425.5
Lc	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
Ld	0	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150
Qa	8	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Qb	4	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
Qc	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Qd	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Weight (kg) Note 5	6.6	7.1	7.6	8.1	8.6	9.1	9.6	10.1	10.6	11.1	11.6	12.1	12.6	13.1	13.6	14.1	14.6	15.1	15.6	16.1	16.6	17.1	17.6	18.1
Maximum speed (mm/sec)																								
Lead 30																								
Lead 20																								
Lead 10																								
Lead 5																								
Speed setting																								



Ordering method

AGXS12

Model	Acceleration/deceleration specifications	Lead	Shape	Motor specification	Stroke	Cable length	Cable entry location	Robot positioner	Driver: Power capacity	Regenerative unit	I/O	Battery
	No entry: Standard H: High agility	30: 30 mm 20: 20 mm 10: 10 mm 5: 5 mm	S: Straight R: Right bending L: Left bending	S: Standard/With no brake BK: Standard/With brake BL: Battery-less absolute/With no brake BKBL: Battery-less absolute/With brake	100 to 1250 (50mm pitch)	R3: 3 m R5: 5 m R10: 10 m	R: From rear of motor F: From front of motor	EP-01	A30: 400W/750W	No entry: None R: With EP-RU	EP: EtherNet/IP™ PT: PROFINET ES: EtherCAT NS: NPN CC: CC-Link	B: With battery N: None

Note 1. When the shape is bending (R, L), the high acceleration/deceleration specifications cannot be selected.

Note 2. For the high acceleration/deceleration specifications, the stroke is 100 to 650 mm (50 mm pitch).

Note 3. The robot cable is flexible and resists bending.

Note 4. When the actuator is used vertically or horizontally and the stroke is 400 mm or more, the regenerative unit is needed.

Note 5. When the motor specification is the standard (S, BK), whether to use the battery needs to be selected.

Specifications

AC servo motor output	400 W
Repeatability Note 1	+/-0.005 mm
Deceleration mechanism	Ground ball screw ϕ 15 (C5 class)
Stroke	100 mm to 1250 mm (50 mm pitch)
Maximum speed Note 2	1800 mm/sec 1200 mm/sec 600 mm/sec 300 mm/sec
Ball screw lead	30 mm 20 mm 10 mm 5 mm
Maximum payload	Horizontal: 35 kg, 50 kg, 95 kg, 115 kg Vertical: 8 kg, 15 kg, 25 kg, 45 kg
Rated thrust	225 N, 339 N, 678 N, 1360 N
Maximum dimensions of cross section of main unit	W 125 mm $\times$ H 101 mm
Overall length	Straight: ST + 302.5 mm Bending: ST + 256.5 mm
Degree of cleanliness Note 3	ISO CLASS 3 (ISO14644-1) or equivalent (non-condensing)
Intake air Note 4	30 N ℓ /min to 90 N ℓ /min
Position detector	Absolute encoder Battery-less absolute encoder
Resolution	23 bits
Using ambient temperature and humidity	0 to 40 $^{\circ}$ C, 35 to 80 %RH (non-condensing)

Note 1. Positioning repeatability in one direction.

Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed. If the effective stroke exceeds 700 mm, the ball screw may resonate. (Critical speed)


Note 3. At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.

Note 4. The required suction amount will vary according to the operating conditions and operating environment.


Note. See P.126 for acceleration/deceleration.

Allowable overhang


Note



AGXS12-30 Horizontal installation (Unit: mm)	A	B	C
10kg	1796	1074	637
20kg	1300	531	332
35kg	1341	334	227




AGXS12-30 Wall installation (Unit: mm)	A	B	C
10kg	631	1009	1720
20kg	316	466	1171
35kg	197	269	1130



AGXS12-30 Vertical installation (Unit: mm)	A	C
3kg	2642	2642
6kg	1289	1289
8kg	951	951

Static loading moment



(Unit: N-m)	MY	MP	MR
334	334	334	294

Controller



Controller	Operation method
EP-01	I/O point trace/ Remote command

When used with high acceleration or deceleration (High agility mode)

Specifications

Stroke	100 mm to 650 mm (50 mm pitch)
Ball screw lead	30 mm, 20 mm, 10 mm, 5 mm
Maximum payload	Horizontal: 20 kg, 30 kg, 40 kg, - Vertical: 4 kg, 8 kg, 16 kg, 24 kg
Maximum acceleration	Horizontal: 19.62 m/s ² (2 G), 19.62 m/s ² (2 G), 19.62 m/s ² (2 G), - Vertical: 19.62 m/s ² (2 G), 19.62 m/s ² (2 G), 19.62 m/s ² (2 G), 9.85 m/s ² (1 G)

Payload - Acceleration / Deceleration Graph (Estimate)

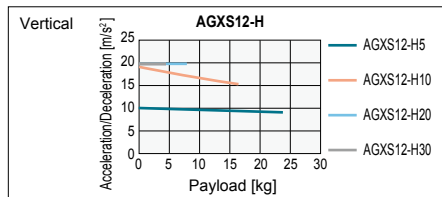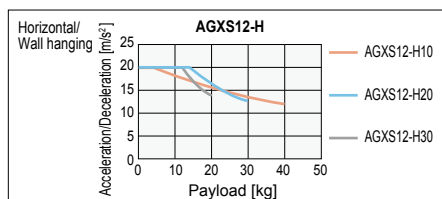

Allowable overhang

Note

AGXS12-H30 Horizontal installation (Unit: mm)	A	B	C
5kg	1216	1297	669
12kg	461	506	252
20kg	316	280	147

AGXS12-H30 Wall installation (Unit: mm)	A	B	C
5kg	648	1224	1183
12kg	226	436	427
20kg	117	213	266

AGXS12-H30 Vertical installation (Unit: mm)	A	C
2kg	1984	1984
4kg	960	960

AGXS12-H5 Vertical installation (Unit: mm)	A	C
8kg	1487	1487
16kg	712	712
24kg	454	454

AGXS12-H20 Horizontal installation (Unit: mm)	A	B	C
10kg	999	807	489
20kg	521	378	231
30kg	382	234	146

AGXS12-H20 Wall installation (Unit: mm)	A	B	C
10kg	458	740	966
20kg	196	311	479
30kg	109	168	325

AGXS12-H20 Vertical installation (Unit: mm)	A	C
3kg	2031	2031
5kg	1193	1193
8kg	722	722

AGXS12-H10 Horizontal installation (Unit: mm)	A	B	C
15kg	1668	737	535
25kg	1060	423	308
40kg	709	246	180

AGXS12-H10 Wall installation (Unit: mm)	A	B	C
15kg	491	672	1628
25kg	263	358	1012
40kg	134	181	644

AGXS12-H10 Vertical installation (Unit: mm)	A	C
5kg	2071	2071
10kg	1011	1011
16kg	612	612

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 600 mm stroke models.

Effective stroke and maximum speed during high acceleration or deceleration

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650
Maximum speed (mm/sec)	Lead 30						1800					
	Lead 20						1200					
	Lead 10						600					
	Lead 5						300					

Note. The bending unit cannot be used for the high agility mode.

Note. The high agility mode is used in an effective stroke range of 100 to 650 (50 mm pitch).

Note. There is no critical speed setting. The maximum speed can be set for a selectable stroke.

The speed may not reach the maximum speed if the movement distance is short or depending on the operating conditions.

Note. When the actuator is used with the high acceleration/deceleration specifications, the operation duty and motor load factor need to be considered. (See P.93.)

Note. See P.128 for acceleration/deceleration.

Access the website below.



► The cycle time simulation and service life calculation can be performed easily from our member site. For details, see P.12.



Ordering method

Model	Acceleration/deceleration specifications	Lead	Shape	Motor specification	Stroke	Cable length	Cable entry location	Robot positioner	Driver: Power capacity	Regenerative unit	I/O	Battery
AGXS16	No entry: Standard H: High agility	40: 40 mm 20: 20 mm 10: 10 mm	S: Straight R: Right bending L: Left bending	S: Standard/With no brake BK: Standard/With brake BL: Battery-less absolute/With no brake BKBL: Battery-less absolute/With brake	100 to 1450 (50mm pitch)	R3: 3 m R5: 5 m R10: 10 m	R: From rear of motor F: From front of motor	EP-01	A30: 400W/750W	No entry: None R: With EP-RU	EP: EtherNet/IP™ PT: PROFINET ES: EtherCAT NS: NPN CC: CC-Link	B: With battery N: None

Note 1. When the shape is bending (R, L), the high acceleration/deceleration specifications cannot be selected.

Note 2. For the high acceleration/deceleration specifications, the stroke is 100 to 800 mm (50 mm pitch).

Note 3. The robot cable is flexible and resists bending.

Note 4. When the actuator is used vertically, the regenerative unit is needed. When the actuator is used horizontally and the stroke of lead 20 is 400 to 850 mm or the stroke of lead 40 is 600 to 950 mm, the regenerative unit is needed.

Note 5. When the motor specification is the standard (S, BK), whether to use the battery needs to be selected.

Specifications

AC servo motor output	750 W
Repeatability	+/-0.005 mm
Deceleration mechanism	Ground ball screw ϕ 20 (C5 class)
Stroke	100 mm to 1450 mm (50 mm pitch)
Maximum speed	2400 mm/sec 1200 mm/sec 600 mm/sec
Ball screw lead	40 mm 20 mm 10 mm
Maximum payload	Horizontal: 45 kg Vertical: 12 kg
Rated thrust	320 N 640 N 1280 N
Maximum dimensions of cross section of main unit	W 160 mm x H 130 mm
Overall length	Straight: ST + 344.8 mm Bending: ST + 294.5 mm
Degree of cleanliness	ISO CLASS 3 (ISO14644-1) or equivalent
Intake air	30 N ℓ /min to 90 N ℓ /min
Position detector	Absolute encoder Battery-less absolute encoder
Resolution	23 bits
Using ambient temperature and humidity	0 to 40 °C, 35 to 80 %RH (non-condensing)

Note 1. Positioning repeatability in one direction.


Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed. If the effective stroke exceeds 800 mm, the ball screw may resonate. (Critical speed)
At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table.

Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.

Note 4. The required suction amount will vary according to the operating conditions and operating environment.


Note. See P.130 for acceleration/deceleration.

Allowable overhang




AGXS16-40

Horizontal installation (Unit: mm)	A	B	C
15kg	2876	1866	1253
30kg	2385	997	776
45kg	2339	720	604



AGXS16-40

Wall installation (Unit: mm)	A	B	C
15kg	1273	1802	2797
30kg	782	935	2263
45kg	598	658	2174



AGXS16-40

Vertical installation (Unit: mm)	A	C
3kg	6605	6605
6kg	3699	3699
12kg	2827	2827

Static loading moment

(Unit: N·m)	MY	MP	MR
	706	706	620

AGXS16-20

Horizontal installation (Unit: mm)	A	B	C
30kg	3862	1255	1106
50kg	2568	733	652
80kg	1798	440	394
95kg	1579	362	325

AGXS16-20

Wall installation (Unit: mm)	A	B	C
30kg	1102	1192	3742
50kg	630	671	2422
80kg	360	377	1612
95kg	288	300	1373

AGXS16-20

Vertical installation (Unit: mm)	A	C
10kg	3404	3404
20kg	1740	1740
28kg	1504	1504

AGXS16-10

Horizontal installation (Unit: mm)	A	B	C
50kg	6253	1026	1024
80kg	4447	623	624
100kg	3957	489	490
130kg	3786	365	367

AGXS16-10

Wall installation (Unit: mm)	A	B	C
50kg	980	964	6089
80kg	573	561	4240
100kg	437	426	3706
130kg	312	302	3422

AGXS16-10

Vertical installation (Unit: mm)	A	C
15kg	3434	3434
30kg	1684	1684
55kg	889	889

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.



Note. Service life is calculated for 600 mm stroke models.

When used with high acceleration or deceleration (High agility mode)

Specifications

Stroke	100 mm to 800 mm (50 mm pitch)
Ball screw lead	40 mm 20 mm 10 mm
Maximum payload	Horizontal: 30 kg Vertical: 8 kg
Maximum acceleration	Horizontal: 19.62 m/s ² (2 G) Vertical: 19.62 m/s ² (2 G)
Maximum payload	Horizontal: 60 kg Vertical: 16 kg
Maximum acceleration	Horizontal: 19.84 m/s ² (2 G) Vertical: 18.43 m/s ² (1.9 G)
Maximum payload	Horizontal: - Vertical: 32 kg
Maximum acceleration	Horizontal: - Vertical: 11.17 m/s ² (1.1 G)

Payload - Acceleration / Deceleration Graph (Estimate)

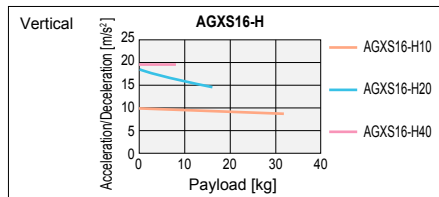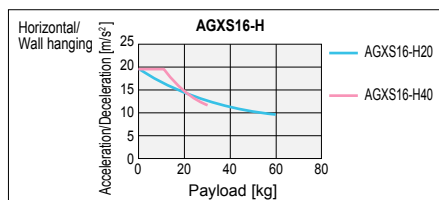

Allowable overhang

AGXS16-H40 Horizontal installation (Unit: mm)	A	B	C
10kg	1271	1669	836
20kg	725	803	429
30kg	534	514	287

AGXS16-H40 Wall installation (Unit: mm)	A	B	C
10kg	816	1585	1240
20kg	404	725	683
30kg	259	441	480

AGXS16-H40 Vertical installation (Unit: mm)	A	C
3kg	2904	2904
5kg	1710	1710
8kg	1038	1038

AGXS16-H10 Vertical installation (Unit: mm)	A	C
10kg	2951	2951
20kg	1438	1438
32kg	870	870

AGXS16-H20

Horizontal installation (Unit: mm)	A	B	C
20kg	1722	1123	875
40kg	952	535	428
60kg	682	339	276

AGXS16-H20

Wall installation (Unit: mm)	A	B	C
20kg	842	1056	1679
40kg	388	470	895
60kg	232	275	611

AGXS16-H20

Vertical installation (Unit: mm)	A	C
5kg	3473	3473
10kg	1723	1723
16kg	1064	1064

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 600 mm stroke models.

Effective stroke and maximum speed during high acceleration or deceleration

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
Maximum speed (mm/sec)	Lead 40: 2400	Lead 20: 1200	Lead 10: 600												

Note. The bending unit cannot be used for the high agility mode.

Note. The high agility mode is used in an effective stroke range of 100 to 800 (50 mm pitch).

Note. There is no critical speed setting. The maximum speed can be set for a selectable stroke.

The speed may not reach the maximum speed if the movement distance is short or depending on the operating conditions.

Note. When the actuator is used with the high acceleration/deceleration specifications, the operation duty and motor load factor need to be considered. (See P.93.)


Note. See P.132 for acceleration/deceleration.

Access the website below.



► The cycle time simulation and service life calculation can be performed easily from our member site. For details, see P.12.

AGXS16 Straight type (S)

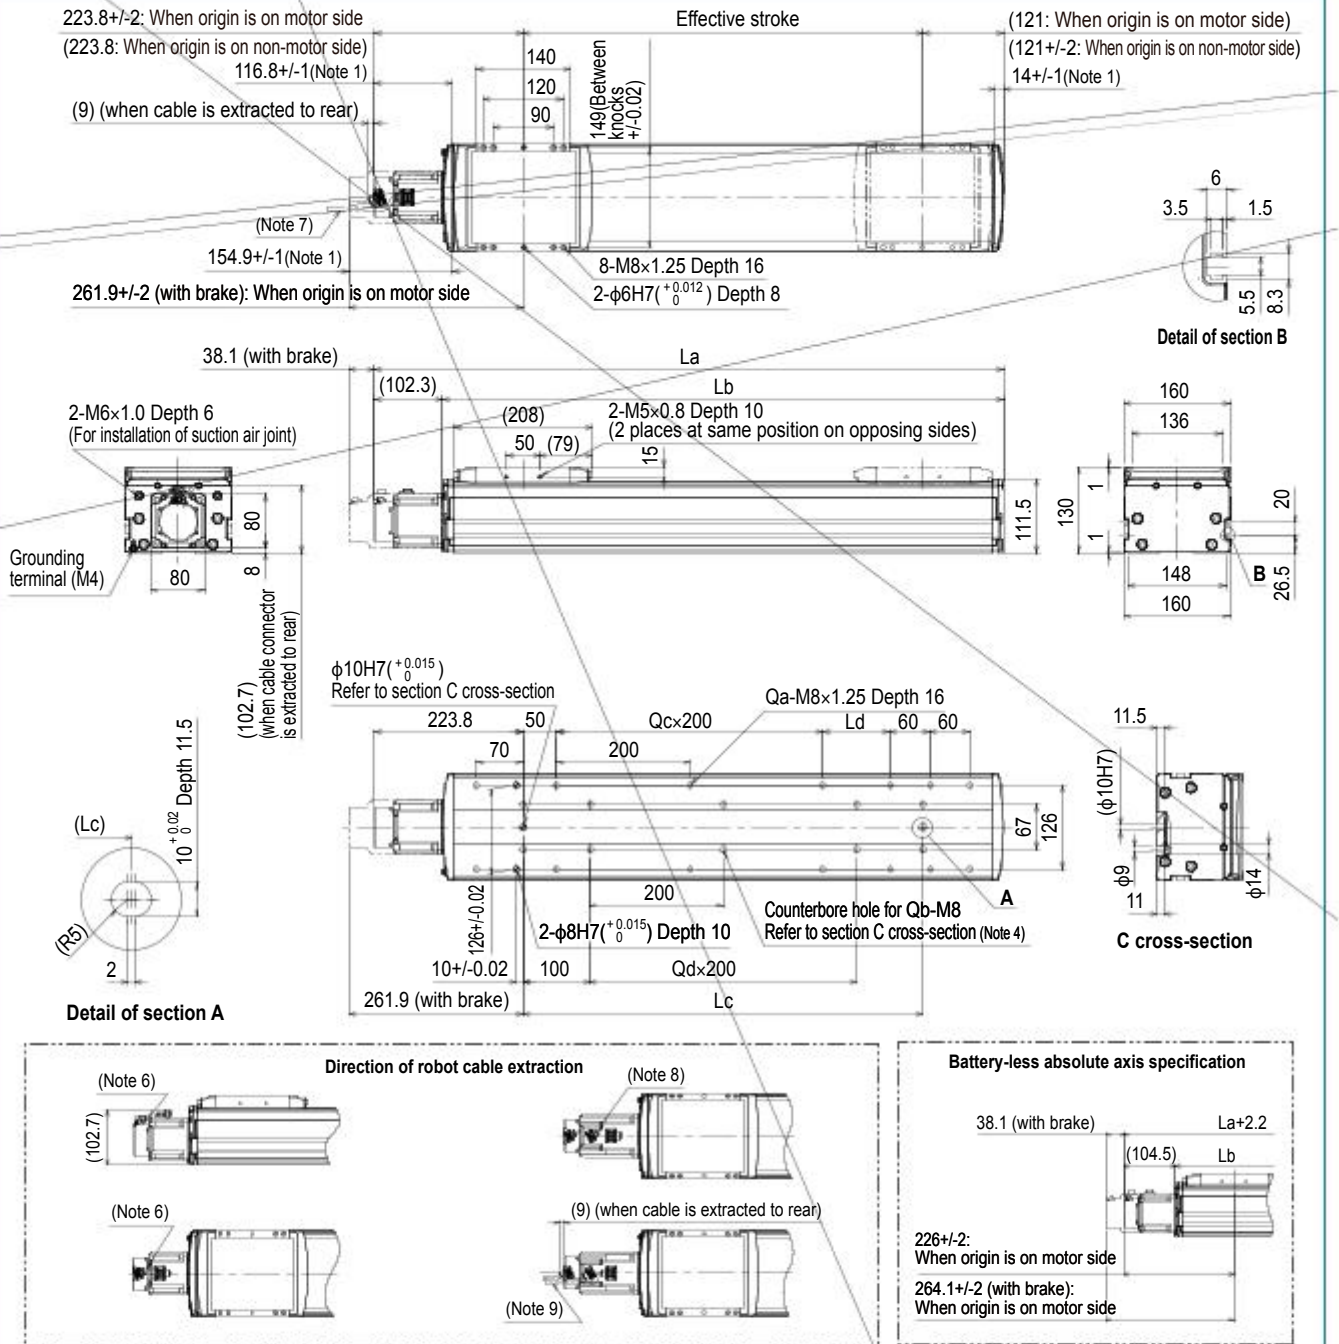

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)

Note 3. The length under head of the hex socket head bolts $\leq$ M8 $\times$ 1.25> used to mount the body with the mounting counterbore holes (section C cross-section) must be $\leq$ 25 mm or more>. The recommended length under head of the hex socket head bolts $\leq$ M8 $\times$ 1.25> used to mount the body with the mounting tap hole specifications is $\leq$ frame thickness + 15 mm or less>.

Note 4. When using the mounting counterbore holes (section C cross-section) to mount the body, remove the seal, and then fix.

Note 5. Weight without brake. The weight with the brake is 0.9 kg heavier than the value in the weight column.

Note 6. The robot cable is extracted from the front.

Note 7. The robot cable is extracted from the rear.

Note 8. The robot cable (with brake) is extracted from the front.


Note 9. The robot cable (with brake) is extracted from the rear.

Note 10. The fixed minimum bending radius of the robot cable is R30. When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.

Note 11. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450
La	444.8	494.8	544.8	594.8	644.8	694.8	744.8	794.8	844.8	894.8	944.8	994.8	1044.8	1094.8	1144.8	1194.8	1244.8	1294.8	1344.8	1394.8	1444.8	1494.8	1544.8	1594.8	1644.8	1694.8	1744.8	1794.8
Lb	342.5	392.5	442.5	492.5	542.5	592.5	642.5	692.5	742.5	792.5	842.5	892.5	942.5	992.5	1042.5	1092.5	1142.5	1192.5	1242.5	1292.5	1342.5	1392.5	1442.5	1492.5	1542.5	1592.5	1642.5	1692.5
Lc	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450
Ld	0	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350
Qa	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	16	18	18	18	18	20	20	20	20	22	22
Qb	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	12	14	14	14	14	16	16	16	16	18	18
Qc	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	3	4	4	4	4	5	5	5	5	6	6
Qd	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	3	4	4	4	4	5	5	5	5	6	6
Weight (kg)	13.6	14.6	15.6	16.6	17.6	18.5	19.5	20.5	21.5	22.5	23.4	24.4	25.4	26.4	27.4	28.4	29.3	30.3	31.3	32.3	33.3	34.3	35.2	36.2	37.2	38.2	39.2	40.1
Maximum speed (mm/sec)	Lead 40	2400															2160	1920	1680	1440	1320	1200	1080	960	840	720	600	
Lead 20	1200															1080	960	840	720	660	600	540	480	420	360	300		
Lead 10	600															540	480	420	360	330	300	270	240	210	180	150		
Speed setting	-															90%	80%	70%	60%	55%	50%	45%	40%	35%	30%	25%		

AGXS16 Bending type (R/L)

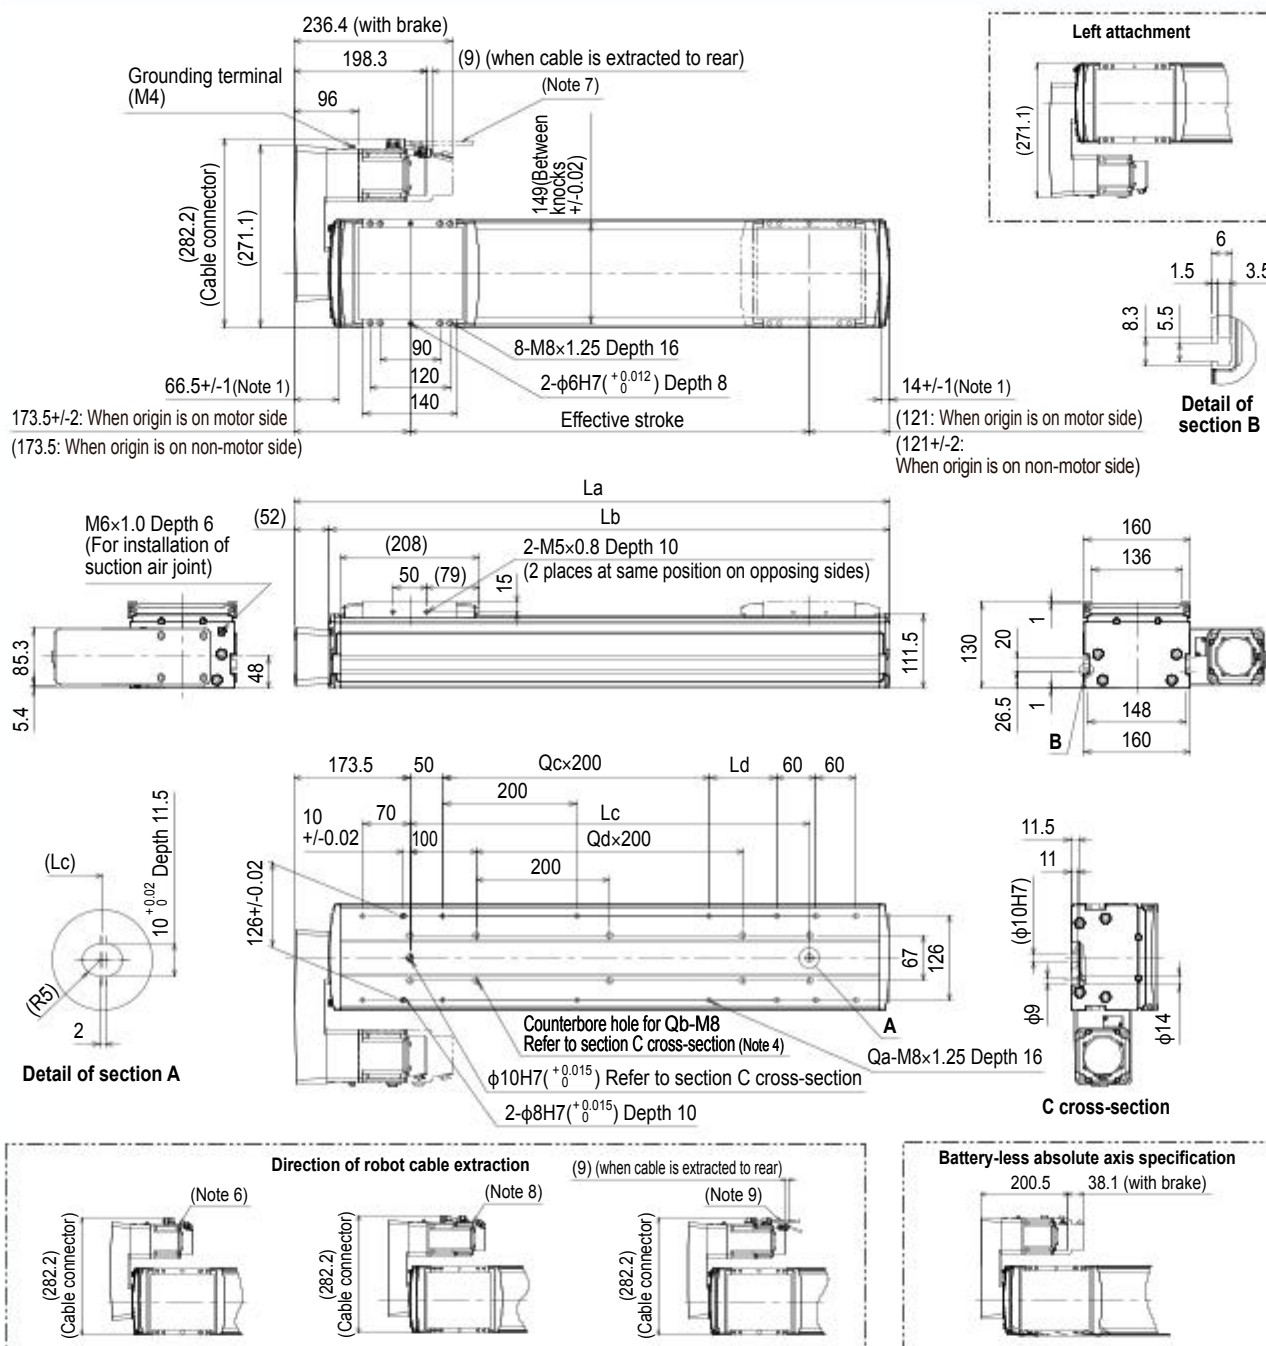

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)

Note 3. The length under head of the hex socket head bolts $<M8 \times 1.25>$ used to mount the body with the mounting counterbore holes (section C cross-section) must be $<<25$ mm or more $>>$. The recommended length under head of the hex socket head bolts $<M8 \times 1.25>$ used to mount the body with the mounting tap hole specifications is $<<frame thickness + 15$ mm or less $>>$.

Note 4. When using the mounting counterbore holes (section C cross-section) to mount the body, remove the seal, and then fix.

Note 5. Weight without brake. The weight with the brake is 0.9 kg heavier than the value in the weight column.

Note 6. The robot cable is extracted from the front.

Note 7. The robot cable is extracted from the rear.

Note 8. The robot cable (with brake) is extracted from the front.

Note 9. The robot cable (with brake) is extracted from the rear.

Note 10. The fixed minimum bending radius of the robot cable is R30. When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.

Note 11. When the shape is bending (R, L), the high acceleration/deceleration specifications cannot be selected.

Note 12. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450
La	394.5	444.5	494.5	544.5	594.5	644.5	694.5	744.5	794.5	844.5	894.5	944.5	994.5	1044.5	1094.5	1144.5	1194.5	1244.5	1294.5	1344.5	1394.5	1444.5	1494.5	1544.5	1594.5	1644.5	1694.5	1744.5
Lb	342.5	392.5	442.5	492.5	542.5	592.5	642.5	692.5	742.5	792.5	842.5	892.5	942.5	992.5	1042.5	1092.5	1142.5	1192.5	1242.5	1292.5	1342.5	1392.5	1442.5	1492.5	1542.5	1592.5	1642.5	1692.5
Lc	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450
Ld	0	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350
Qa	8	10	10	10	10	12	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	20	20	20	20	22	22	22
Qb	4	6	6	6	6	8	8	8	8	10	10	10	10	10	12	12	12	12	14	14	14	16	16	16	16	18	18	18
Qc	0	0	0	0	0	1	1	1	1	2	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	6	6	6
Qd	0	0	0	0	0	1	1	1	1	2	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	6	6	6
Weight (kg) Note 5	16.3	17.3	18.3	19.3	20.3	21.2	22.2	23.2	24.2	25.2	26.1	27.1	28.1	29.1	30.1	31.1	32.0	33.0	34.0	35.0	36.0	37.0	37.9	38.9	39.9	40.9	41.9	42.8
Maximum speed (mm/sec)	Lead 40	2400															2160	1920	1680	1440	1320	1200	1080	960	840	720	600	600
Lead 20	1200															1080	960	840	720	660	600	540	480	420	360	300	300	300
Lead 10	600															540	480	420	360	330	300	270	240	210	180	150	150	150
Speed setting	-															90%	80%	70%	60%	55%	50%	45%	40%	35%	30%	25%	25%	25%

AGXS20

Advanced model

Single-axis robots

Slider type



Ordering method

Model	Lead	Shape	Motor specification	Stroke	Cable length	Cable entry location	Robot positioner	Driver: Power capacity	Regenerative unit	I/O	Battery
AGXS20	40: 40 mm 20: 20 mm 10: 10 mm	S: Straight R: Right bending L: Left bending	S: Standard/With no brake BK: Standard/With brake BL: Battery-less absolute/With no brake BKBL: Battery-less absolute/With brake	100 to 1450 (50mm pitch)	R3: 3 m R5: 5 m R10: 10 m	R: From rear of motor F: From front of motor	EP-01	A30: 400W/750W	No entry: None R: With EP-RU	EP: EtherNet/IP™ PT: PROFINET ES: EtherCAT NS: NPN CC: CC-Link	B: With battery N: None

Note 1. The robot cable is flexible and resists bending.

Note 2. When the actuator is used vertically, the regenerative unit is needed.

When the actuator is used horizontally and the stroke of lead 20 is 400 to 850 mm or the stroke of lead 40 is 600 to 950 mm, the regenerative unit is needed.

Note 3. When the motor specification is the standard (S, BK), whether to use the battery needs to be selected.

Specifications

AC servo motor output		750 W		
Repeatability ^{Note 1}		+/-0.005 mm		
Deceleration mechanism		Ground ball screw φ 20 (C5 class)		
Stroke		100 mm to 1450 mm(50 mm pitch)		
Maximum speed ^{Note 2}		2400 mm/sec	1200 mm/sec	600 mm/sec
Ball screw lead		40 mm	20 mm	10 mm
Maximum payload	Horizontal	65 kg	130 kg	160 kg
	Vertical	15 kg	35 kg	65 kg
Rated thrust		320 N	640 N	1280 N
Maximum dimensions of cross section of main unit		W 200 mm × H 140 mm		
Overall length	Straight	ST + 390.8 mm		
	Bending	ST + 340.5 mm		
Degree of cleanliness ^{Note 3}		ISO CLASS 3 (ISO14644-1) or equivalent		
Intake air ^{Note 4}		30 Nℓ/min to 90 Nℓ/min		
Position detector		Absolute encoder Battery-less absolute encoder		
Resolution		23 bits		
Using ambient temperature and humidity		0 to 40 °C, 35 to 80 %RH (non-condensing)		

Note 1. Positioning repeatability in one direction.

Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed.

If the effective stroke exceeds 800 mm, the ball screw may resonate. (Critical speed)

At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table.

Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.


Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Note. See P.133 for acceleration/deceleration.

Controller

Controller	Operation method
EP-01	I/O point trace/Remote command

Allowable overhang ^{Note}



AGXS20-40

Horizontal installation

(Unit: mm)

	A	B	C
20kg	5318	2821	2096
40kg	4836	1609	1369
65kg	4824	1088	1001

Wall installation

(Unit: mm)

	A	B	C
20kg	2171	2751	5211
40kg	1417	1539	4667
65kg	1013	1018	4575

Vertical installation

(Unit: mm)

	A	C
5kg	8187	8187
10kg	5203	5203
15kg	4810	4810

AGXS20-20

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)				Vertical installation (Unit: mm)			
	A	B	C		A	B	C		A	B	C
50kg	5436	1493	1377	50kg	1390	1423	5265	20kg	3436	3436	
80kg	4417	911	854	80kg	849	841	4153	30kg	2600	2600	
100kg	4592	756	727	100kg	708	686	4253	35kg	3073	3073	
130kg	4338	596	584	130kg	550	526	3933				


AGXS20-10

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)				Vertical installation (Unit: mm)						
		A	B	C			A	B	C			A	B	C
40kg		22519	2607	2713	40kg		2704	2537	22210	20kg		5157	5157	
80kg		16716	1274	1331	80kg		1293	1204	16141	40kg		2553	2553	
120kg		14066	830	868	120kg		818	760	13223	65kg		1600	1600	
160kg		12284	608	637	160kg		580	538	11190					

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 600 mm stroke models.

Static loading moment




(Unit: N·m)		
MY	MP	MR
1423	1423	1251

Access the website below.



► The cycle time simulation and service life calculation can be performed easily from our member site. For details, see P.12.

AGXS20 Straight type (S)

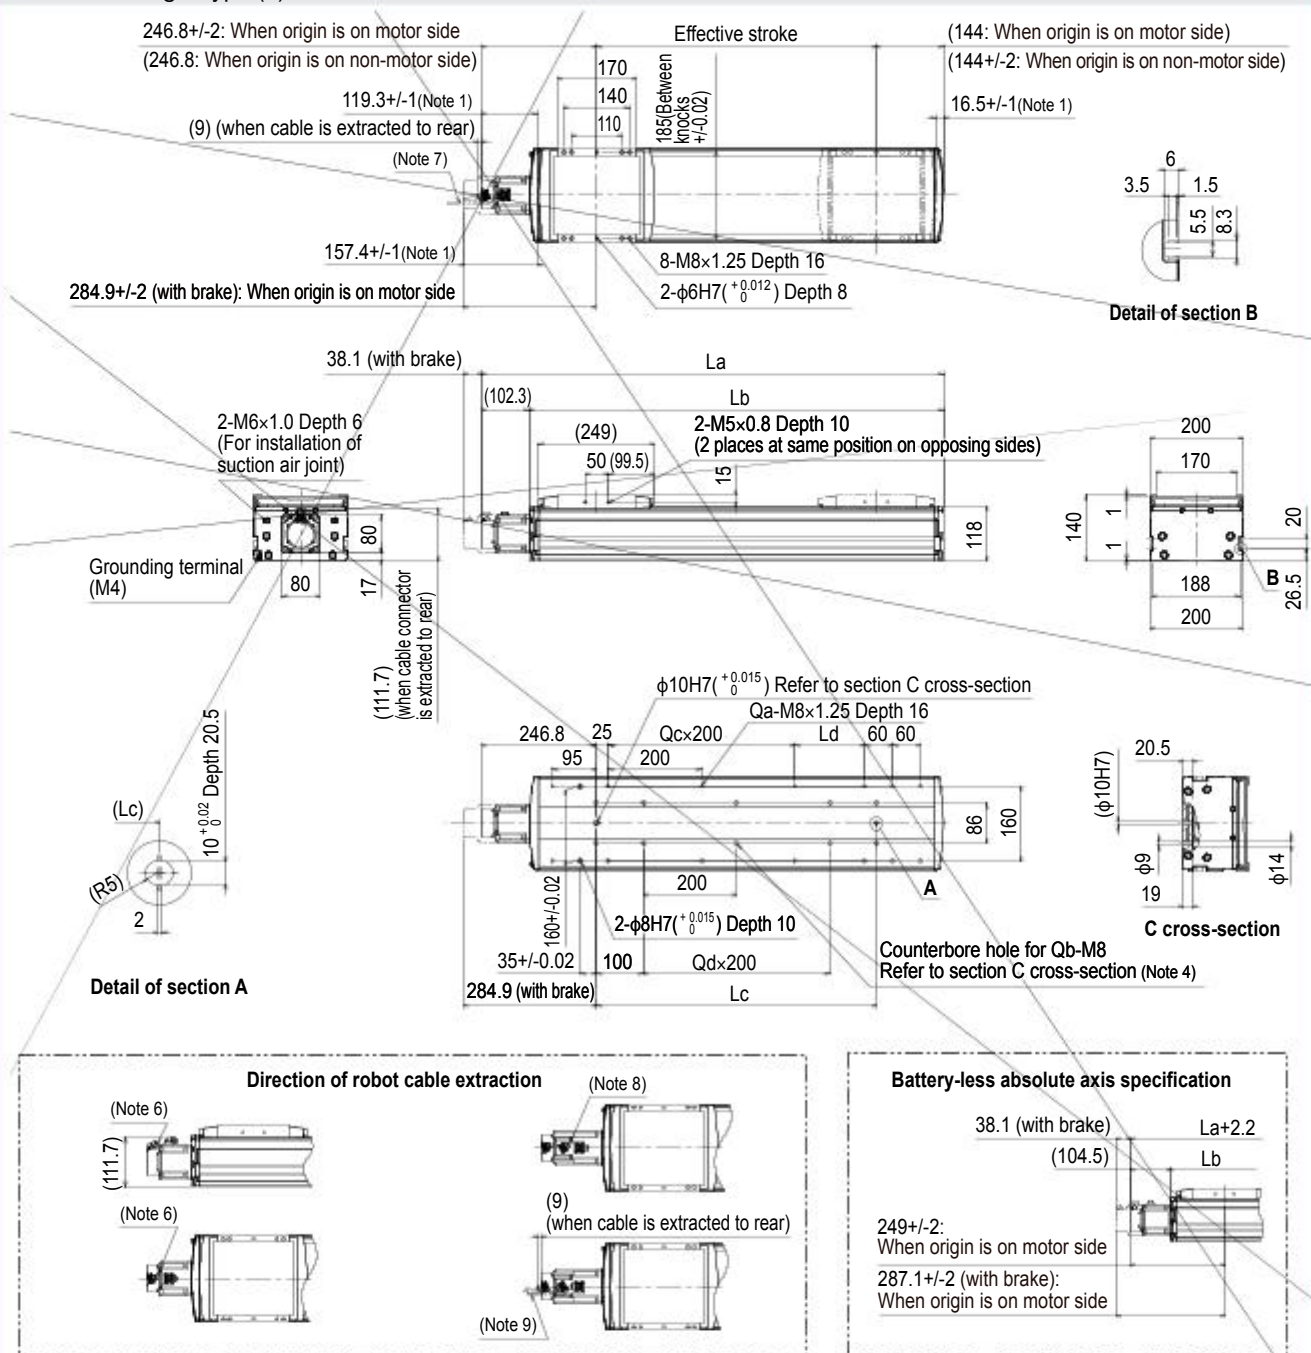

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)

Note 3. The length under head of the hex socket head bolts $\langle$ M8 $\times$ 1.25 $\rangle$ used to mount the body with the mounting counterbore holes (section C cross-section) must be $\langle$ 25 mm or more $\rangle$. The recommended length under head of the hex socket head bolts $\langle$ M8 $\times$ 1.25 $\rangle$ used to mount the body with the mounting tap hole specifications is $\langle$ frame thickness + 15 mm or less $\rangle$.

Note 4. When using the mounting counterbore holes (section C cross-section) to mount the body, remove the seal, and then fix.

Note 5. Weight without brake. The weight with the brake is 1.1 kg heavier than the value in the weight column.

Note 6. The robot cable is extracted from the front.

Note 7. The robot cable is extracted from the rear.

Note 8. The robot cable (with brake) is extracted from the front.

Note 9. The robot cable (with brake) is extracted from the rear.


Note 10. The fixed minimum bending radius of the robot cable is R30.

When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.

Note 11. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450
La	490.8	540.8	590.8	640.8	690.8	740.8	790.8	840.8	890.8	940.8	990.8	1040.8	1090.8	1140.8	1190.8	1240.8	1290.8	1340.8	1390.8	1440.8	1490.8	1540.8	1590.8	1640.8	1690.8	1740.8	1790.8	1840.8
Lb	388.5	438.5	488.5	538.5	588.5	638.5	688.5	738.5	788.5	838.5	888.5	938.5	988.5	1038.5	1088.5	1138.5	1188.5	1238.5	1288.5	1338.5	1388.5	1438.5	1488.5	1538.5	1588.5	1638.5	1688.5	1738.5
Lc	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450
Ld	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200
Qa	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	20	20	20	20	22	22	22	22	22
Qb	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18
Qc	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6
Qd	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6
Weight (kg) Note 5	19.1	20.4	21.7	23.0	24.3	25.6	26.9	28.2	29.5	30.7	32.0	33.3	34.6	35.9	37.2	38.5	39.8	41.1	42.3	43.6	44.9	46.2	47.5	48.8	50.1	51.4	52.7	53.9
Maximum speed (mm/sec)	Lead 40	2160	1920	1680	1440	1320	1200	1080	960	840	720	660	600	540	480	420	360	300	270	240	210	180	150	120	90	60	30	25
Speed setting	Lead 20	1080	960	840	720	660	600	540	480	420	360	330	300	270	240	210	180	150	120	90	60	30	25	20	15	10	5	4
	Lead 10	540	480	420	360	330	300	270	240	210	180	150	120	90	60	30	25	20	15	10	5	4	3	2	1	0.5	0.25	0.125
	Speed setting	90%	80%	70%	60%	55%	50%	45%	40%	35%	30%	25%	20%	15%	10%	5%	4%	3%	2%	1%	0.5%	0.25%	0.125%	0.0625%	0.03125%	0.015625%	0.0078125%	0.00390625%

AGXS20 Bending type (R/L)

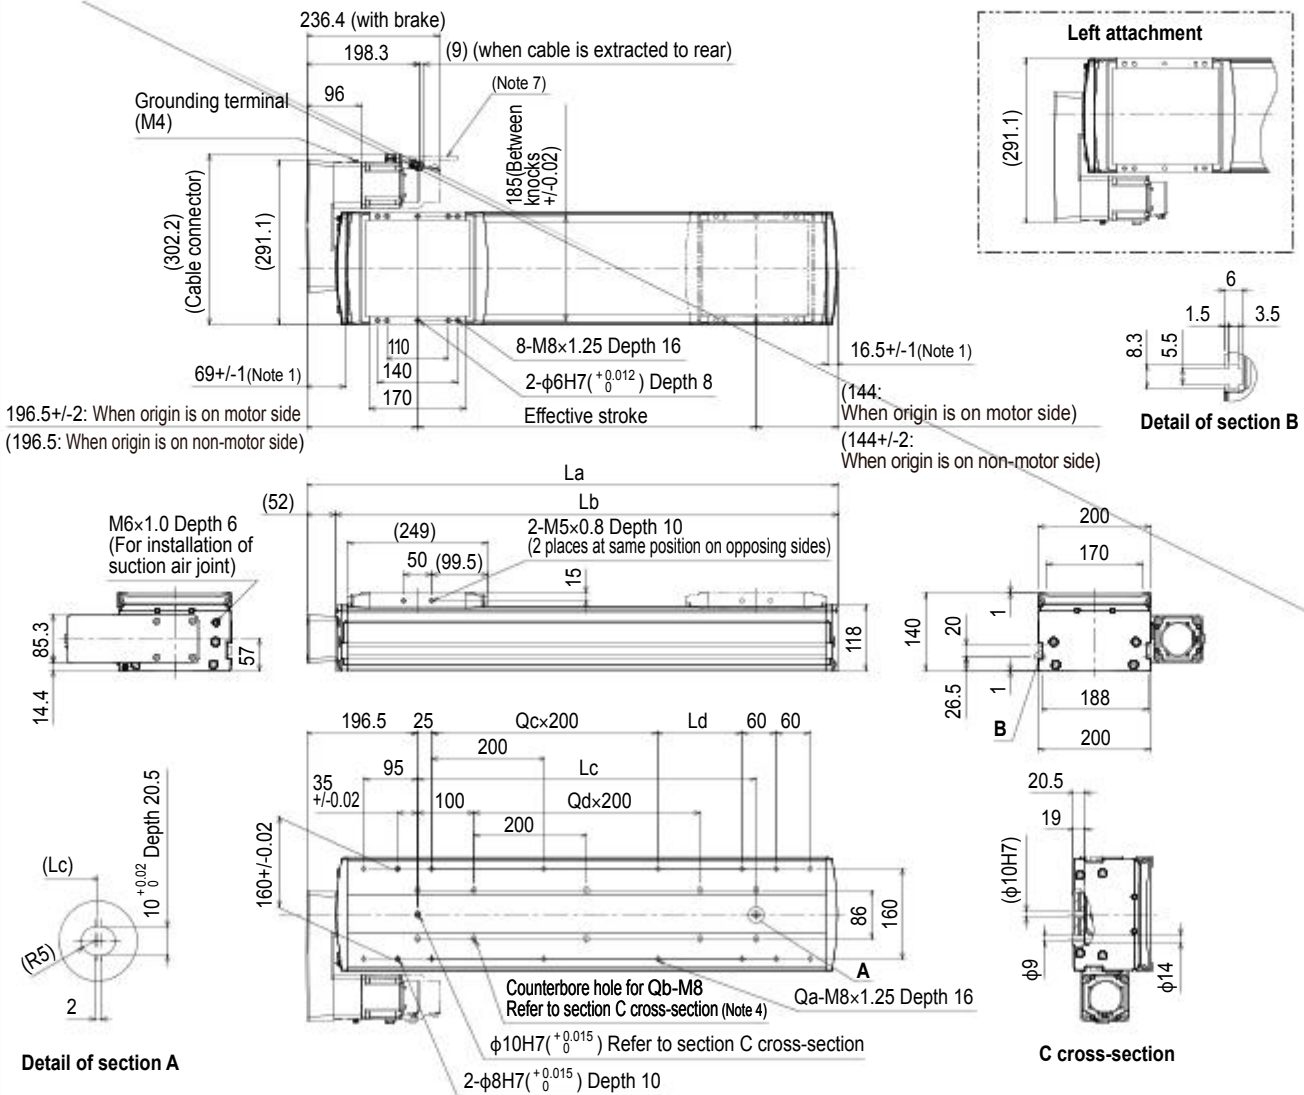

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)
 Note 3. The length under head of the hex socket head bolts <M8 × 1.25> used to mount the body with the mounting counterbore holes (section C cross-section) must be <<25 mm or more>>. The recommended length under head of the hex socket head bolts <M8 × 1.25> used to mount the body with the mounting tap hole specifications is <<frame thickness + 15 mm or less>>.
 Note 4. When using the mounting counterbore holes (section C cross-section) to mount the body, remove the seal, and then fix.
 Note 5. Weight without brake. The weight with the brake is 1.1 kg heavier than the value in the weight column.
 Note 6. The robot cable is extracted from the front.
 Note 7. The robot cable is extracted from the rear.

- Note 8. The robot cable (with brake) is extracted from the front.
 Note 9. The robot cable (with brake) is extracted from the rear.
 Note 10. The fixed minimum bending radius of the robot cable is R30. When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.
 Note 11. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450
La	440.5	490.5	540.5	590.5	640.5	690.5	740.5	790.5	840.5	890.5	940.5	990.5	1040.5	1090.5	1140.5	1190.5	1240.5	1290.5	1340.5	1390.5	1440.5	1490.5	1540.5	1590.5	1640.5	1690.5	1740.5	1790.5
Lb	388.5	438.5	488.5	538.5	588.5	638.5	688.5	738.5	788.5	838.5	888.5	938.5	988.5	1038.5	1088.5	1138.5	1188.5	1238.5	1288.5	1338.5	1388.5	1438.5	1488.5	1538.5	1588.5	1638.5	1688.5	1738.5
Lc	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450
Ld	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400
Qa	10	10	10	10	12	12	12	12	14	14	14	14	14	16	16	16	18	18	18	20	20	20	20	22	22	22	22	22
Qb	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	18	18	18	18
Qc	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6
Qd	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6
Weight (kg) Note 5	21.8	23.1	24.4	25.7	27.0	28.3	29.6	30.9	32.2	33.4	34.7	36.0	37.3	38.6	39.9	41.2	42.5	43.8	45.0	46.3	47.6	48.9	50.2	51.5	52.8	54.1	55.4	56.6
Maximum speed (mm/sec)	Lead 40	2160	1920	1680	1440	1320	1200	1080	960	840	720	660	600	540	480	420	360	300	270	240	210	180	150	120	960	840	720	600
Speed setting	Lead 20	540	480	420	360	330	300	270	240	210	180	150	120	960	840	720	660	600	540	480	420	360	300	270	240	210	180	150
	Lead 10	90%	80%	70%	60%	55%	50%	45%	40%	35%	30%	25%	20%	15%	10%	5%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%