

SANMOTION C S100

Motion controller

Ver.3
English



SANMOTION C

MOTION CONTROLLER

EtherCAT®



SANMOTION C S100

MOTION CONTROLLER

Equipped with the industry-trusted high-speed fieldbus EtherCAT interface, these models are available in two configurations: a high-performance type (Model no. SMC100-A) for controlling robots and a standard type (Model no. SMC100-B) that specializes in PTP (Point-to-Point) positioning. They are ideal for applications such as assembly equipment and conveying machines.



Refer to the following catalogs for AC servo systems and closed-loop stepping systems (Model No.PB) equipped with EtherCAT interface. Catalogs are available for download from our Catalog Site.

- SANMOTION G Catalog
- SANMOTION R 100/200 V General Catalog
- SANMOTION R 400 V Catalog
- SANMOTION R ADVANCED MODEL 48 VDC Catalog
- SANMOTION Model No.PB Catalog

Information on **SANMOTION C S500** (separate catalog available)

This motion controller can control 15 robot configurations, including complex 7-axis articulated robots.

Functions such as trajectory control and interpolated operation can be done with ease, contributing to the in-house robot motion planning.

EtherCAT®




Motion controller **SANMOTION C S100**

System Configuration Examples

Assembly equipment (Model no. SMC100-A)


Robot control

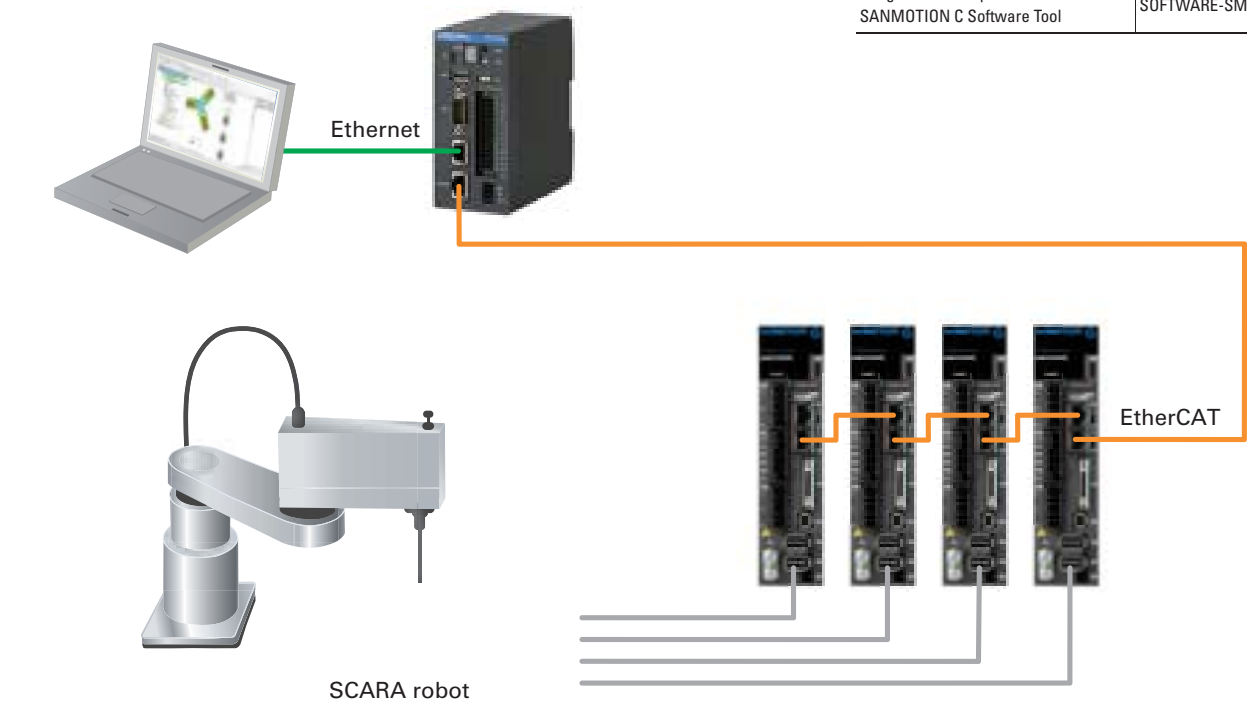

Name	Model no.
Motion controller	SMC100-A
Integrated development software SANMOTION C Software Tool	SOFTWARE-SMC100- ☐ ☐ ☐

Automatic coating machine (Model no. SMC100-A)


Interpolation control, etc.

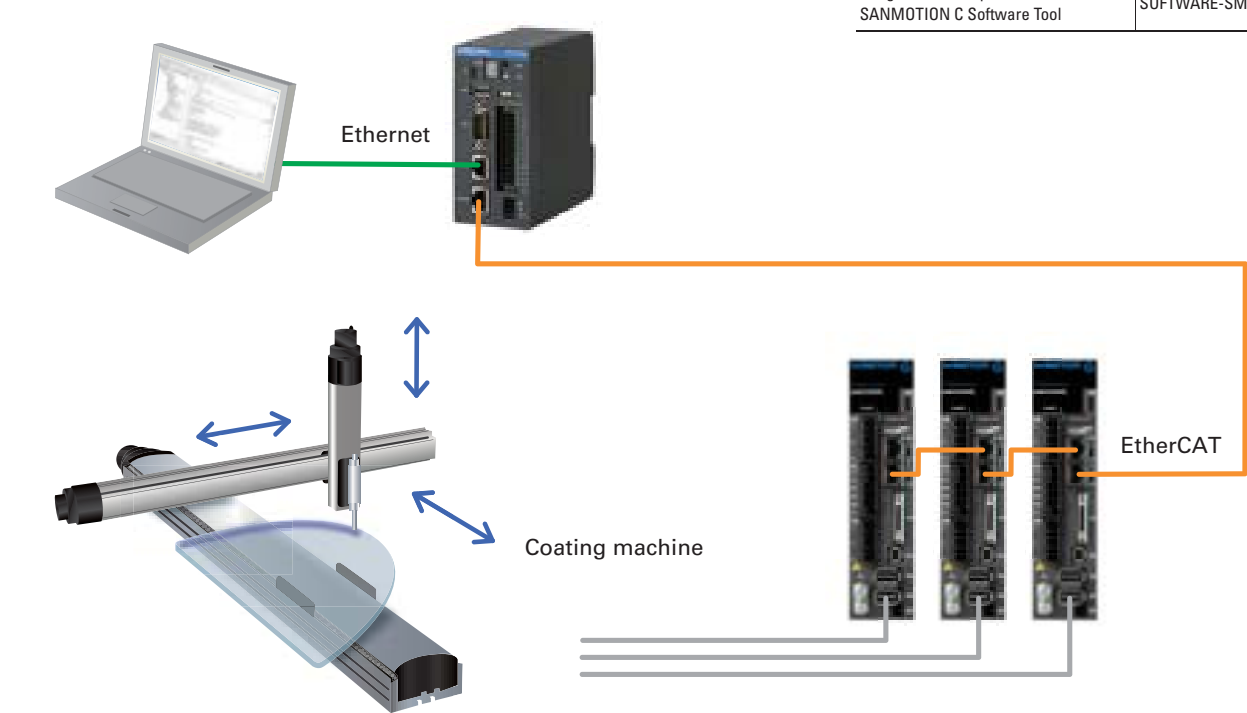


Name	Model no.
Motion controller	SMC100-A
Integrated development software SANMOTION C Software Tool	SOFTWARE-SMC100- ☐ ☐ ☐

Tray loader (Model no. SMC100-B)

PTP motion controller

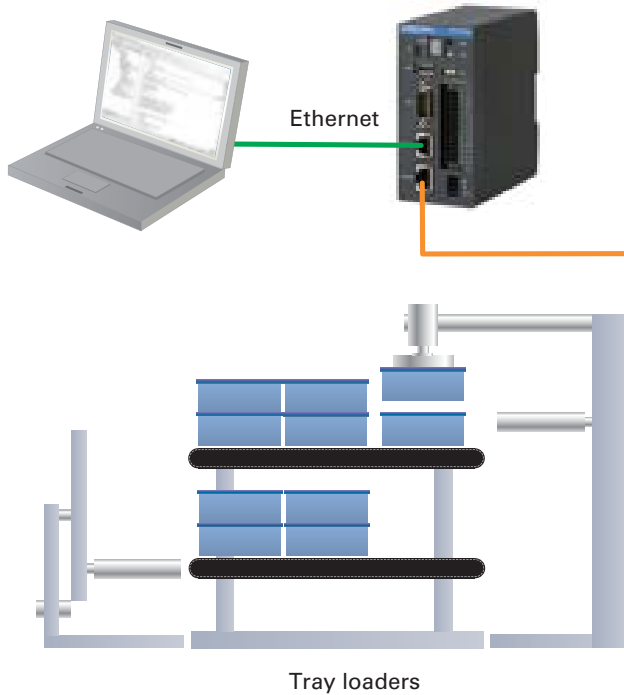

Name	Model no.
Motion controller	SMC100-B
Integrated development software SANMOTION C Software Tool	SOFTWARE-SMC100- ☐ ☐ ☐

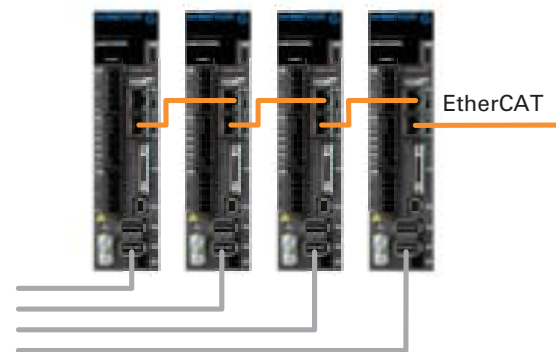

SCARA robot moving with automated guided vehicle (Model no. SMC100-A)

Robot control




Name	Model no.
Motion controller	SMC100-A
Integrated development software SANMOTION C Software Tool	SOFTWARE-SMC100- ☐ ☐ ☐
Wireless Adapter	SMC-USBW-01

Software and peripherals

Integrated development software **SANMOTION C Software Tool**

Software features various functions for system development.

- Programming tool
- Electronic cam editor
- Configuration tool
- Simple HMI (human machine interface) tool
- Analysis and diagnostic tool

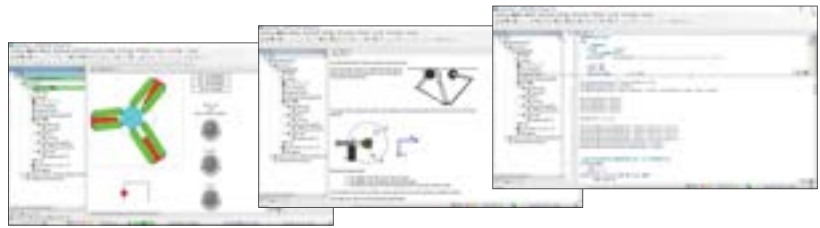


Wireless Adapter adds wireless communication to motion controllers

- Status monitoring and settings of SANMOTION products can be done remotely from smart devices.
- Motion controllers can be connected to a wireless LAN network by simply connecting the adapter to their USB port.
- The adapter can be set for use in various countries.
- Send a license key we provide to motion controllers to turn on wireless capability.

Note: The serial number of the controller is required for issuing the license key.



System Configuration

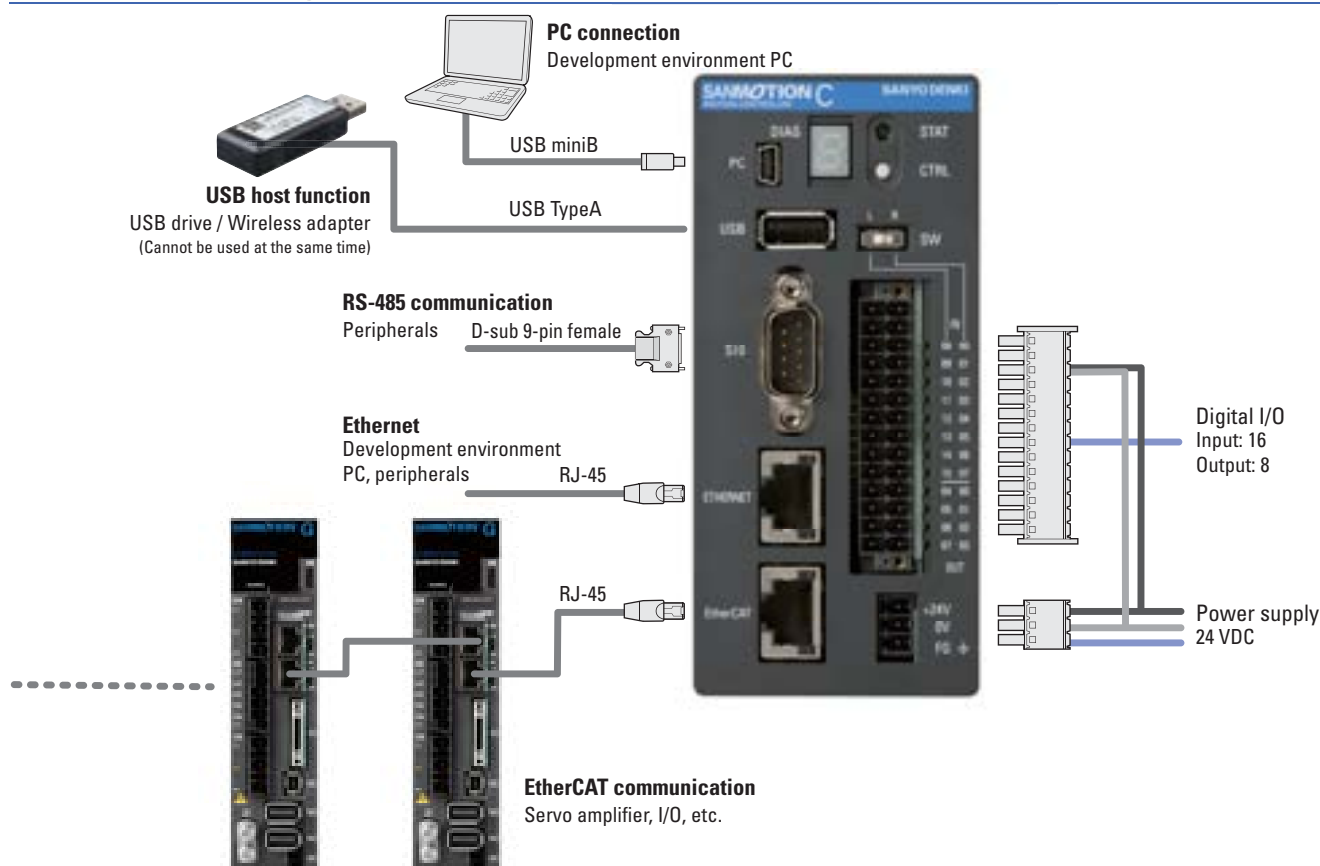

Specifications

Model no.		SMC100-A	SMC100-B
Interface		EtherCAT (100 Mbps) master function, FoE-compatible	
		Ethernet (10/100/1000 Mbps) protocols (Modbus TCP, OPC-UA)	
		RS-485 (9600 to 115200 bps)	
		USB 2.0 (for memory storage)	
Digital I/O		Digital input: 16 points; rated input voltage: 24 VDC; positive/negative common input	
		Digital output: 8 points; load voltage range: 19.2 to 30 VDC; maximum load current: 0.5 A/point; sink output	
Input power supply	main power supply	Rated voltage: 24 VDC; load voltage range: 19.2 to 30 VDC; Rated current: 0.8 A	
	I/O power supply	Rated voltage: 24 VDC; load voltage range: 19.2 to 30 VDC; Rated current: 20 mA	
Power consumption		19.2 W	
Cooling method		Passive	
Dimensions		55(W) × 120(H) × 110(D) mm	
Mass		300 g	
Max. no. of controllable axes		8	
Control functions		Sequence control	
		Motion control (Electronic cam, electronic gear, linear interpolation, circular interpolation)	
		Robot control (Cartesian coordinate, SCARA, and parallel link robots)	
Network functions		Web visualization	
Control language		Programming languages conforming to international standard (IEC 61131-3)	
		G-code (SMC100-A only)	
Ambient temperature		0 to 55°C	
Storage temperature		-40 to 70°C	
Operation/storage humidity		10 to 95% (non-condensing)	
Vibration resistance		Constant amplitude: 3.5 mm (5 to 8.4 Hz) conforming to JIS B 3502:2011	
		Constant acceleration: 10 m/s ² (8.4 to 150 Hz) conforming to JIS B 3502:2011	
Shock resistance		Peak acceleration: 147 m/s ² , duration 11 ms conforming to JIS B 3502:2011	
Operation altitude		2,000 m max.	
Installation location		In control panel	
Overvoltage category		II or lower	
Degree of pollution		2 or lower	

Control functions

Motion control function

Number of controllable axes	8
Communication cycle	2 to 16 ms
Control system	Position control, speed control, torque control
Acceleration/deceleration profile	Trapezoidal, Sin ² , trapezoidal with jerk limit
Unit for positioning control	Arbitrary (pulse, mm, inch, degree)
Programming language	Complies with IEC 61131-3 IL, ST, LD, FBD, SFC, CFC
Function block	Homing, incremental mode, absolute mode, constant speed mode, electronic cam, electronic gear

Robot control function (Model no. SMC100-A only)

Number of controllable axes	Robot: 4 axes max
Communication cycle	8 to 16 ms
Control system	PTP motion, 3D linear interpolation, 3D circular interpolation
Teaching method	Numeric input
Unit for positioning control	Arbitrary (pulse, mm, inch, degree)
Programming language	Motion function block
Supported robots	Cartesian coordinate (3 axes), SCARA (4 axes), parallel link (4 axes)

EtherNet/IP™ specifications

Common	Interface	Ethernet (10/100 Mbps) Note: Can be combined with Modbus TCP, etc.
	Communication	Scanner function: Network master Adapter function: Network slave Note: Cannot be used at the same time.
	Node distance	100 m or less
	Topology	Star
	Communication cable	Shielded twisted pair cable, category 5/5e or higher recommended
	Conformance testing	ODVA conformance (Conformance test 16 passed)
Scanner	Maximum number of connectable units	4
	Minimum communication cycle	50 ms
Adapter	Device type	12
	Maximum data length	Output: 508 bytes, input: 504 bytes (Recommended output: 128 bytes, input: 128 bytes)
	Minimum communication cycle	50 ms
	Supported data types	BYTE (1 byte) WORD (2 bytes) DWORD (4 bytes) REAL (4 bytes) Big (A collection of BYTE type data with the maximum data length)

Software

■ Connector set

Model no.	Application	Manufacturer part no.
AL-01005600-01	Power connector	Phoenix Contact K.K. FMC 1,5/3-ST-3,5
AL-01005600-02	I/O connector	Phoenix Contact K.K. DFMC 1,5/14-ST-3,5-LR

■ USB cable

Model no.	Application
AL-00896515-01	USB cable (1 m)
AL-00896515-02	USB cable (2 m)

■ Integrated development software SANMOTION C Software Tool

Model no.	Application
SOFTWARE-SMC100- ☐ ☐ ☐	Integrated development software for sequence/motion/robot control

Peripherals

■ Wireless Adapter

Model no.			SMC-USBW-01
Basic specifications	Dimensions		21.8 (W) × 11.5 (H) × 56.5 (D) mm
	Mass		Approx. 10 g
	Rated voltage		5 VDC
	Interface		USB 2.0 Type A
	Use with		Motion controllers (SANMOTION C S100) only
	Operating environment	Ambient temperature	0 to 55°C
Ambient humidity		10 to 95% (non-condensing)	
Functions	Wireless standard		Compliant with IEEE802.11b / IEEE802.11g / IEEE802.11n
	Operating frequency band		2.4 GHz band
	Channels		1 to 13
	Maximum communication speed		72.2 Mbps
	Wireless LAN mode		Access point mode (Acting as a master network station)
			Station mode (Acting as a slave network station)
	Maximum number of connectable units		3 (in access point mode)
Security		WPA2-PSK (AES)	
Applicable regions	Japan		Technical Standard Conformity Certification, VCCI
	Europe		CE (RE Directive, RoHS2)
	North America		FCC, ISED
	China		SRRC
	Taiwan		NCC

Options

■ EtherCAT cables with RJ-45 plug

Model no.	Cable length	Specifications	Manufacturer
AL-01109322-R50	0.5 m	Plug: RJ-45 (TM21P-88P), on both ends Boot color: black Cable: 20276 ESVP AWG#24X4P, CAT5e	Plug: Hirose Electric Co., Ltd. Cable: Bando Densen Co., Ltd.
AL-01109322-01	1 m		
AL-01109322-03	3 m		
AL-01109322-05	5 m		
AL-01109322-10	10 m		


■ Ethernet cables with RJ-45 plug

Model no.	Cable length	Specifications	Manufacturer
AL-01111556-01	1 m	Plug: RJ-45 (TM21P-88P), on both ends Boot color: yellow Cable: 20276 ESVP AWG#24X4P, CAT5e	Plug: Hirose Electric Co., Ltd. Cable: Bando Densen Co., Ltd.
AL-01111556-03	3 m		
AL-01111556-05	5 m		
AL-01111556-10	10 m		

Dimensions [Unit: mm]


Motion controller

Model no.: SMC100-A, SMC100-B

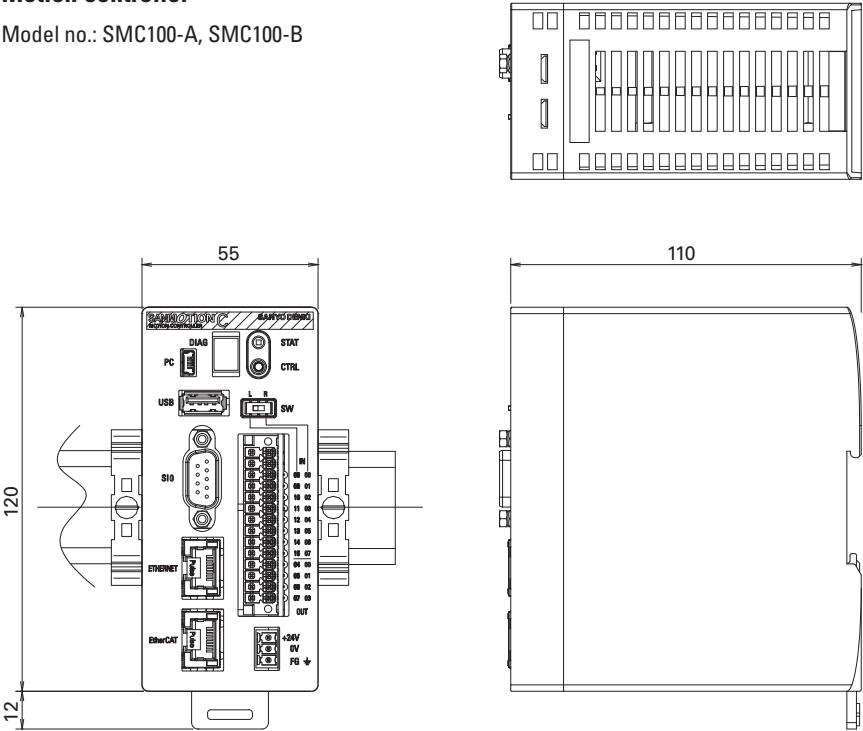

Wireless Adapter

Model no.: SMC-USBW-01





■ ECO PRODUCTS

ECO PRODUCTS are designed to reduce the environmental impacts throughout the product's life cycle. Ranging from design to manufacturing stages, the environmental impact of a product and its packaging materials is assessed against the eco-design requirements. Those products that satisfy the requirements are accredited as ECO PRODUCTS.

Notes Before Purchase

- Read the accompanying Instruction Manual carefully prior to using the product.
- Do not use this product in an environment where vibration is present, such as in moving vehicles or shipping vessels.
- Do not modify or alter the product in any way.

Please contact us beforehand if you intend to use this product in the following applications.

- Medical equipment that may have an effect on human life
- Systems or equipment that may have a major impact on society or on the public.
- Special applications related to aviation and space, nuclear power, electric power, submarine repeaters, etc.

SANYO DENKI CO., LTD. 3-33-1 Minami-Otsuka, Toshima-ku, Tokyo 170-8451, Japan TEL: +81 3 5927 1020

<https://www.sanyodenki.com/>

The names of companies and/or their products specified in this document are the trade names, and/or trademarks and/or registered trademarks of such respective companies.

San Ace, SANUPS, and SANMOTION are registered trademarks of SANYO DENKI CO., LTD.

Specifications are subject to change without notice.

CATALOG No.S1050B004 '23.1